

KICHLER

Style to live by™



Alameda Collection Outdoor Wall Sconce 1Lt CV 9143CV

Product Description:

This 1 light outdoor wall sconce from the Alameda™ collection will bring a cozy, down-to-earth design to your outer décor. A classic lantern shape, this fixture features a distinctive Canyon View™ finish and luminous Honey Opalescent Glass.

Technical Information

Lamp Included:	Not Included
Weight:	2.96 LBS
Glass Description:	HONEY OPALESCENT GLASS
Extension:	4.75
Safety Rated:	Wet
HCWO:	3.75
Base Backplate:	7 X 8.125
CFL Bulb Type:	HYBRID (23-30W)
Dual Mount:	No
Light Source:	Incandescent
Socket Base:	Medium
Number of Bulbs:	1
Lamp Type:	A19
Max Watt:	700
Width:	7"
Height:	8.25"
Collection:	Alameda Collection

Project

Type

Ordering #

Comments


RECEIVED

JAN 15 2015


San Mateo County
Planning and Building Department

COLOR STUDY FOR:
NEW RESIDENCE
15TH STREET - MONTARA
APN: 037-015-090


ASPHALT SHINGLE ROOF
COLOR: ANTIQUE SLATE



TRIM, FASCIA, & GARAGE DR.
BEN MOORE # HC-85
FAIRVIEW TAUPE



SHINGLES
BEN MOORE # 1486
WINTERWOOD



SIDING
BEN MOORE # 1496
RAINTREE GREEN



STUCCO STONE
ELBORADO STONE
FIELD EDGE-ANDANTE



EXTERIOR LIGHTING
KICHLER-ALAMEDA SERIES
#914-CV-NITE SKY

INDEX TO DRAWINGS



- A.1 SITE PLAN, NOTES, SITE DETAILS TABULATIONS, DRIVEWAY PROFILE
- A.2 GARAGE LEVEL FLOOR PLAN
- A.2.1 MAIN AND UPPER LEVEL FLOOR PLANS
- A.3 EXTERIOR ELEVATIONS
- A.4 BUILDING SECTIONS, ROOF PLAN
- L.1 LANDSCAPE PLAN, TREE PROTECTION PLAN, NOTES
- C-1 ROAD PLAN
- C-2 GRADING AND DRAINAGE PLAN
- C-3 EROSION CONTROL PLAN
- SUR1 SURVEY

TABULATIONS

Zone	R1/S17/DR/CD
Lot Size	6,000 SF
Lot Coverage (35% = 2,100 SF)	
1,291 SF Main Floor	
25 SF Upper Floor Pop out	
56 SF Garage Pop out	
146 SF Covered Front Porch	
18 SF Bay Windows	
87 SF Deck	
Actual Lot Coverage 27.8%	1,673 SF
FAR (.53%=3,180 SF)	
Main Floor	1,291 SF
Upper Floor	1,176 SF
Conditioned Floor Area	2,467 SF
Garage	625 SF
Cov'd Porch	60 SF
Actual FAR 52.5%	3,152 SF
Setbacks Proposed	
27' 15 th Street	
30' Up Hill (14 th Street)	
5-0' Side	
15' East Avenue Side	
Construction Type V-B Sprinkled	
Occupancy R-3/U	

1. FAÇADE ARTICULATION METHOD USED.
2. HEIGHT LIMIT DETERMINED BY LOT SLOPE GREATER THAN 1 FOOT FALL IN 7 FEET WITH A SEWER CONNECTION WHICH MUST BE MADE UPHILL. SECTION 6300.2.6
3. ACTUAL LOT SLOPE + 16%
4. ALL STREET AND DRIVEWAY APPROACH IMPROVEMENTS SHALL BE ACCORDING TO COUNTY STANDARDS.

A NEW RESIDENCE FOR:
PAUL MCGREGOR
 1900 EAST STREET
 MONTARA, CA. 94037 APN: 037-015-090

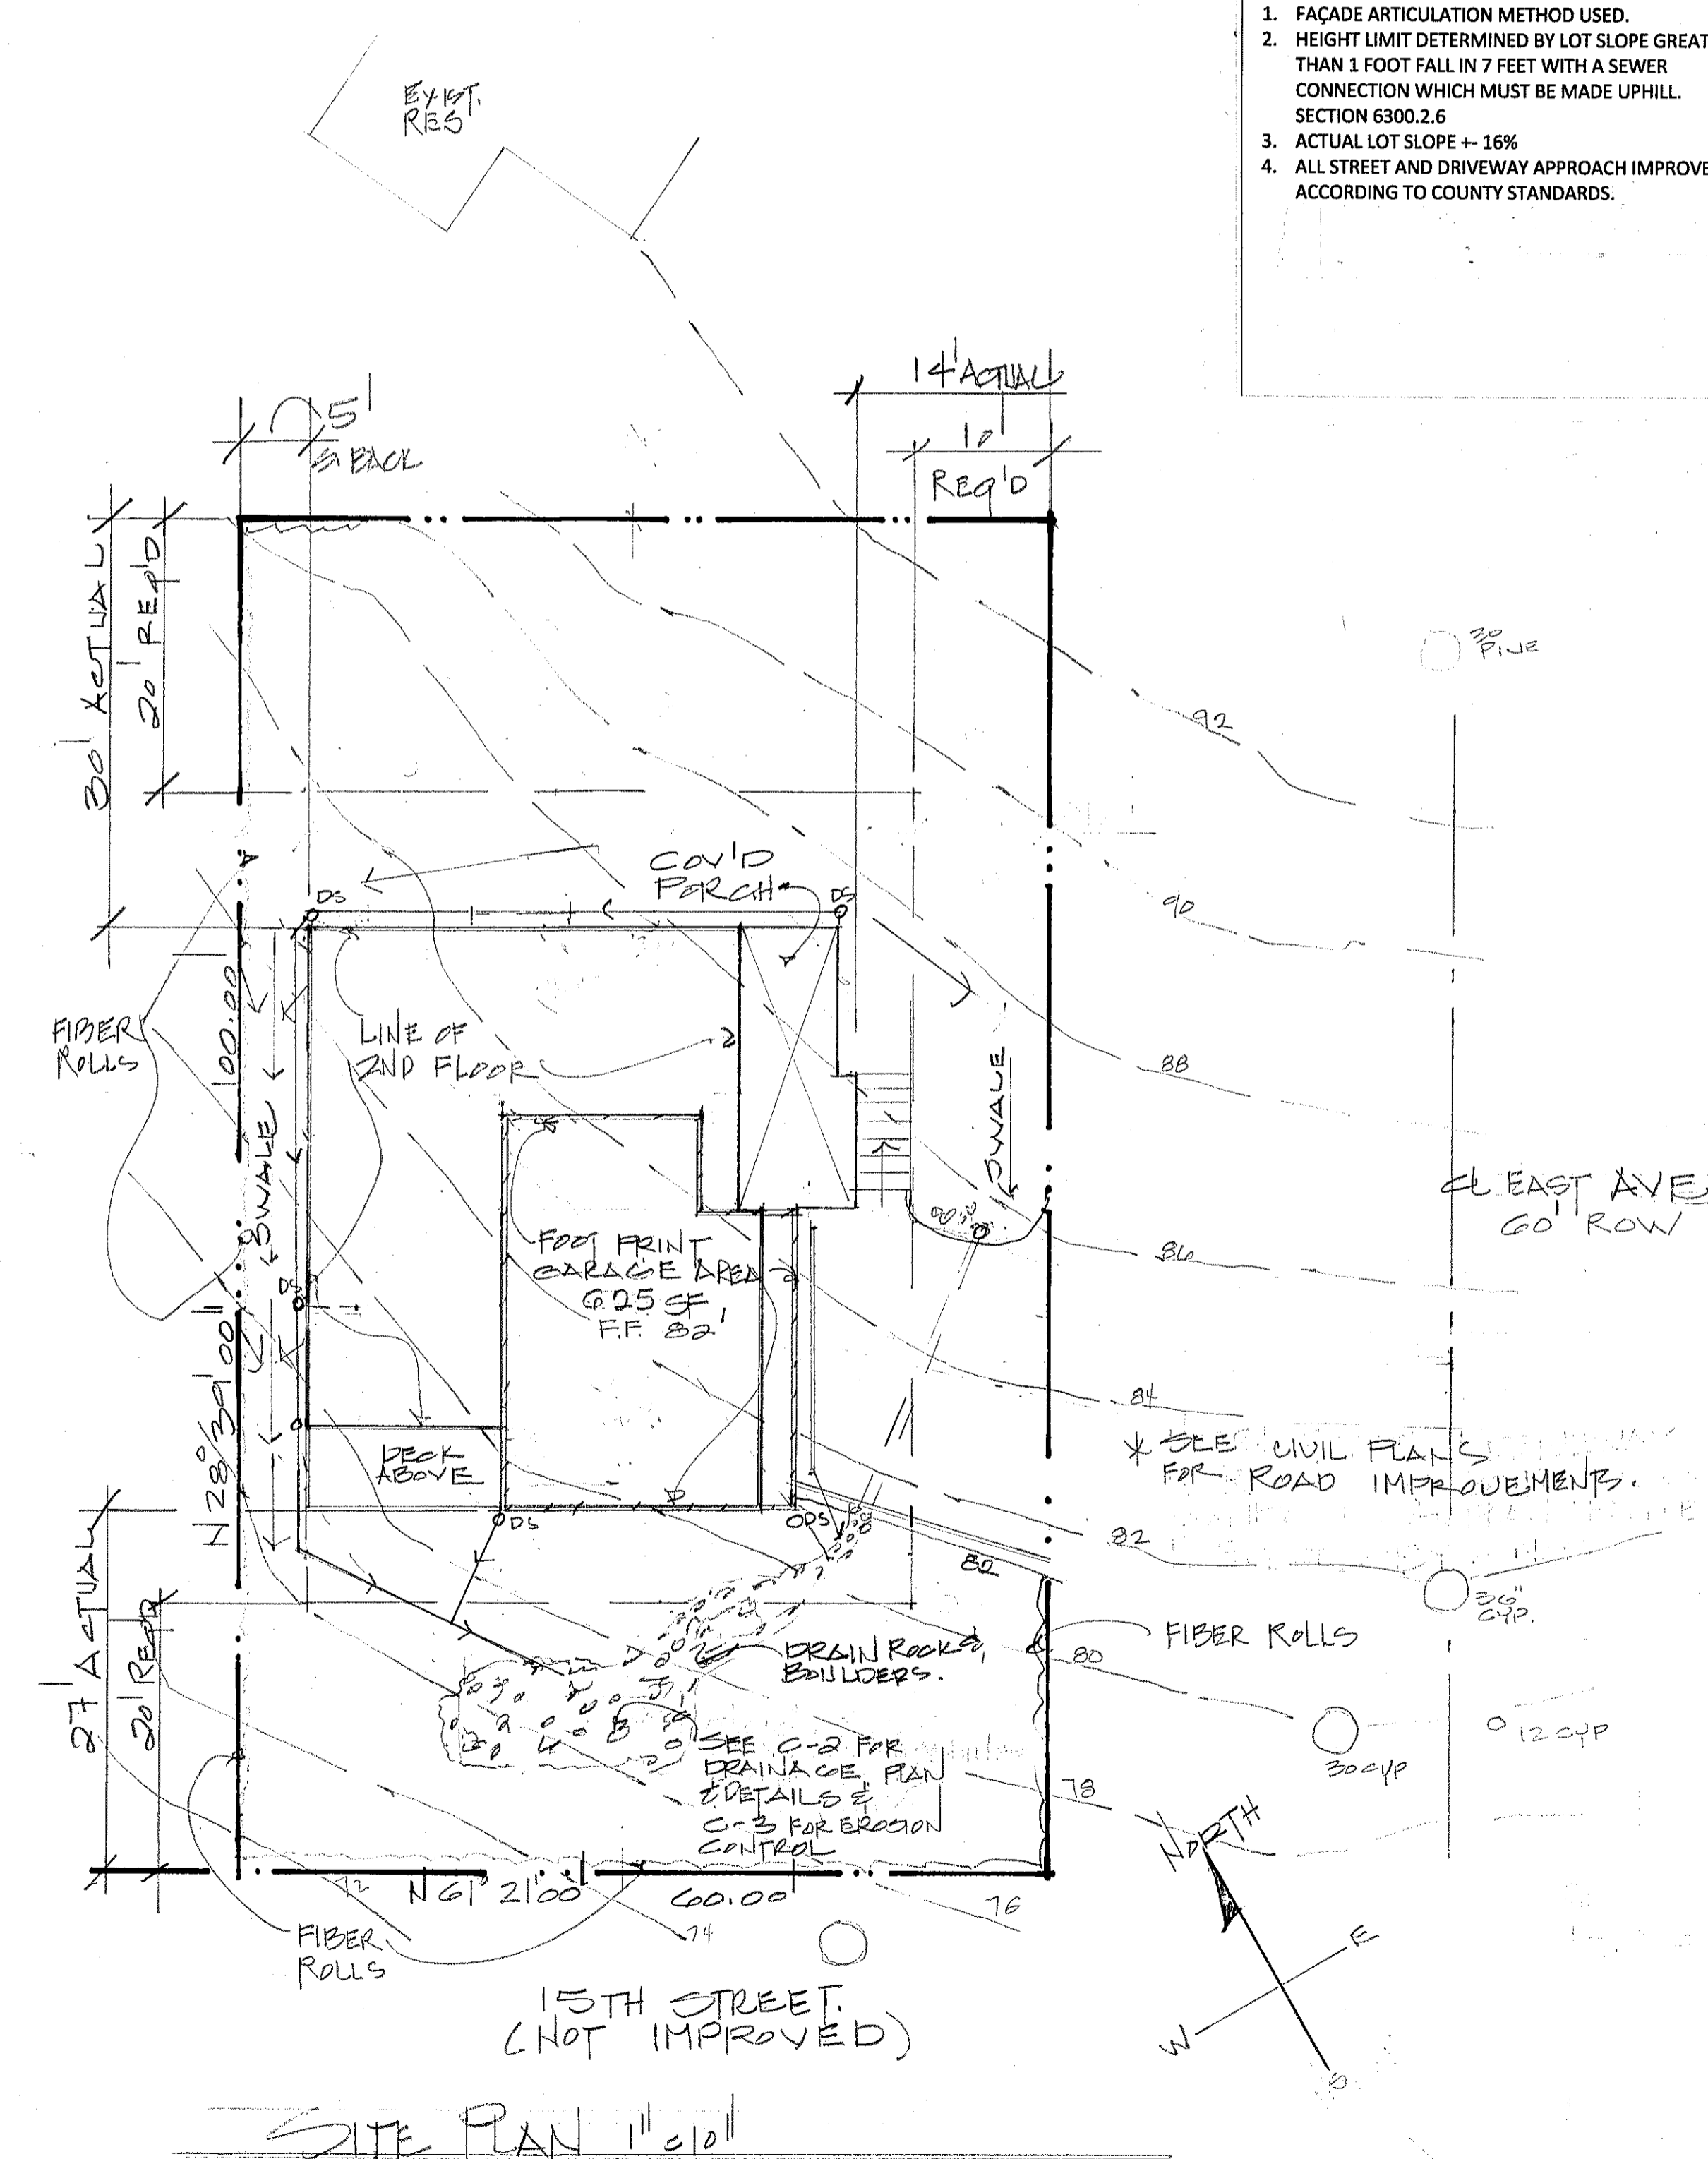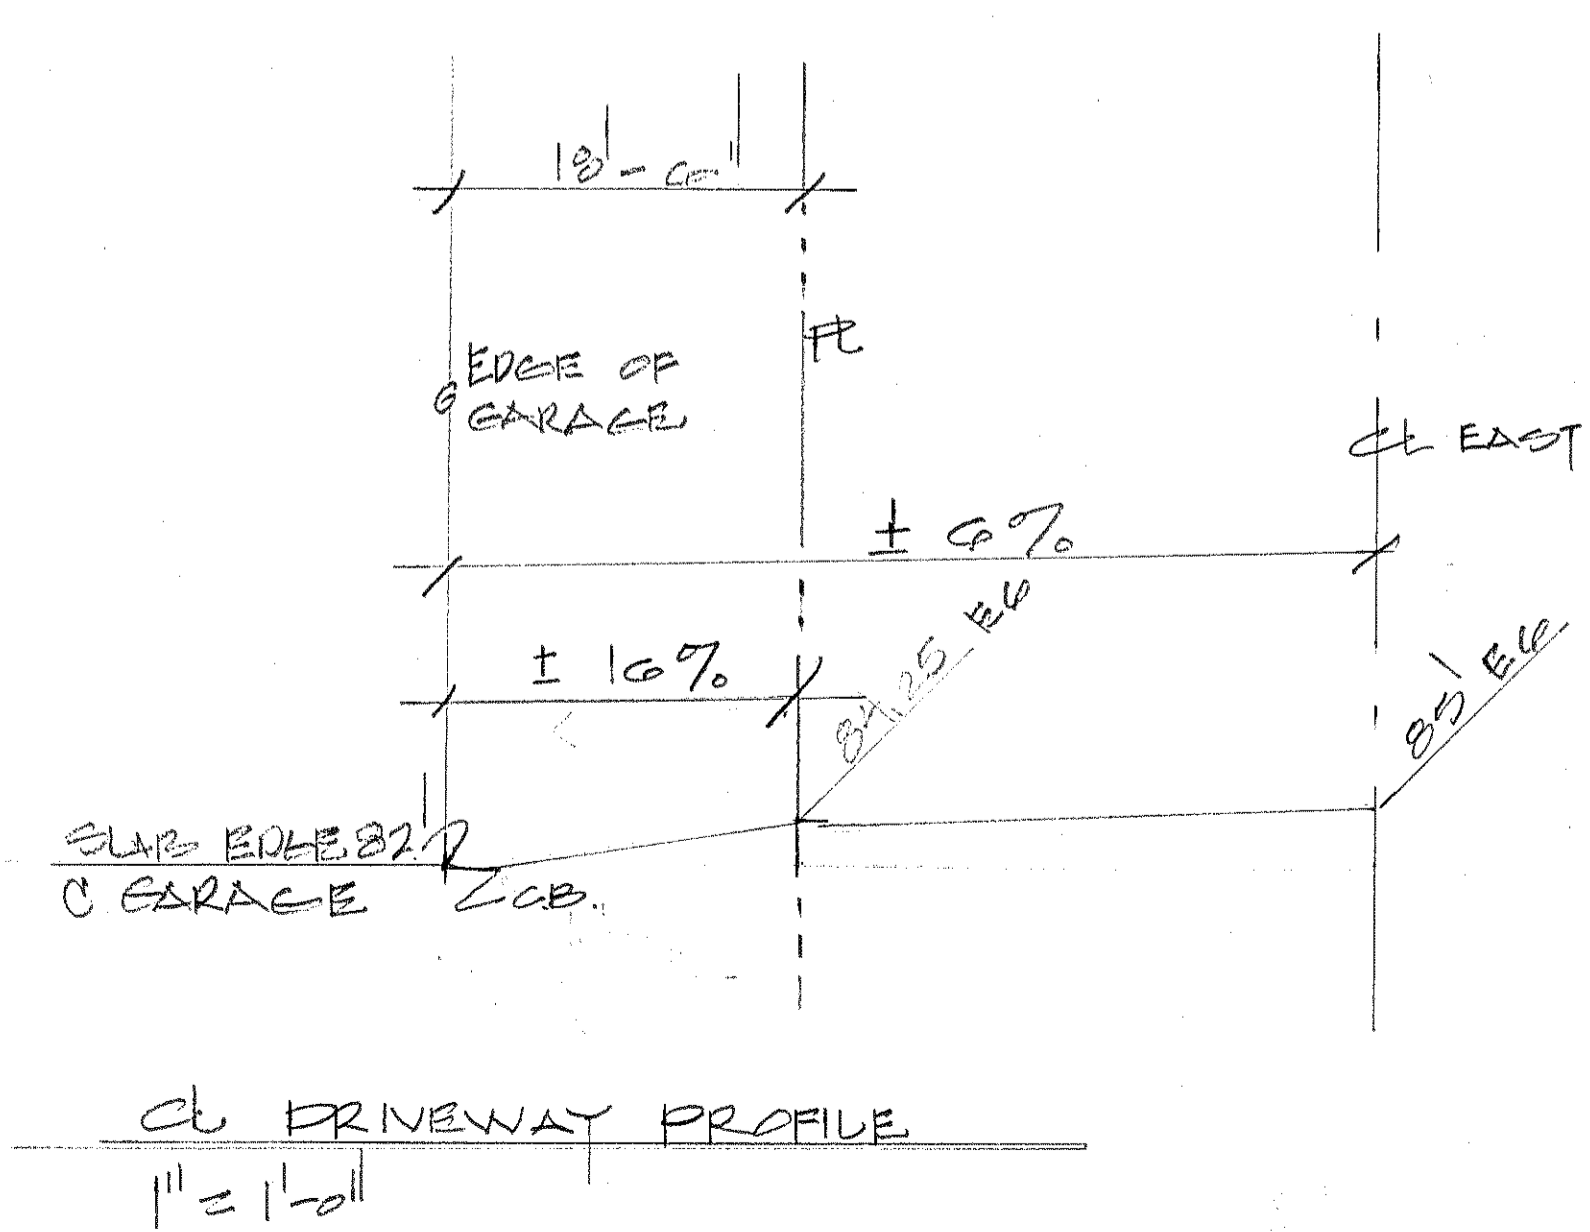


Plans Prepared By:
Anne Gustin Design, Inc.
 3414 Scenic Drive
 Napa, CA 94558
 Phone: (707)251-9500
 Fax: (707)251-9123
 anne_gustin@yahoo.com

PRINTED

DEC 11 14
DEC 05 14
DEC 23 14
DEC 11 14

SHEET 1.0
A.1 OF 6


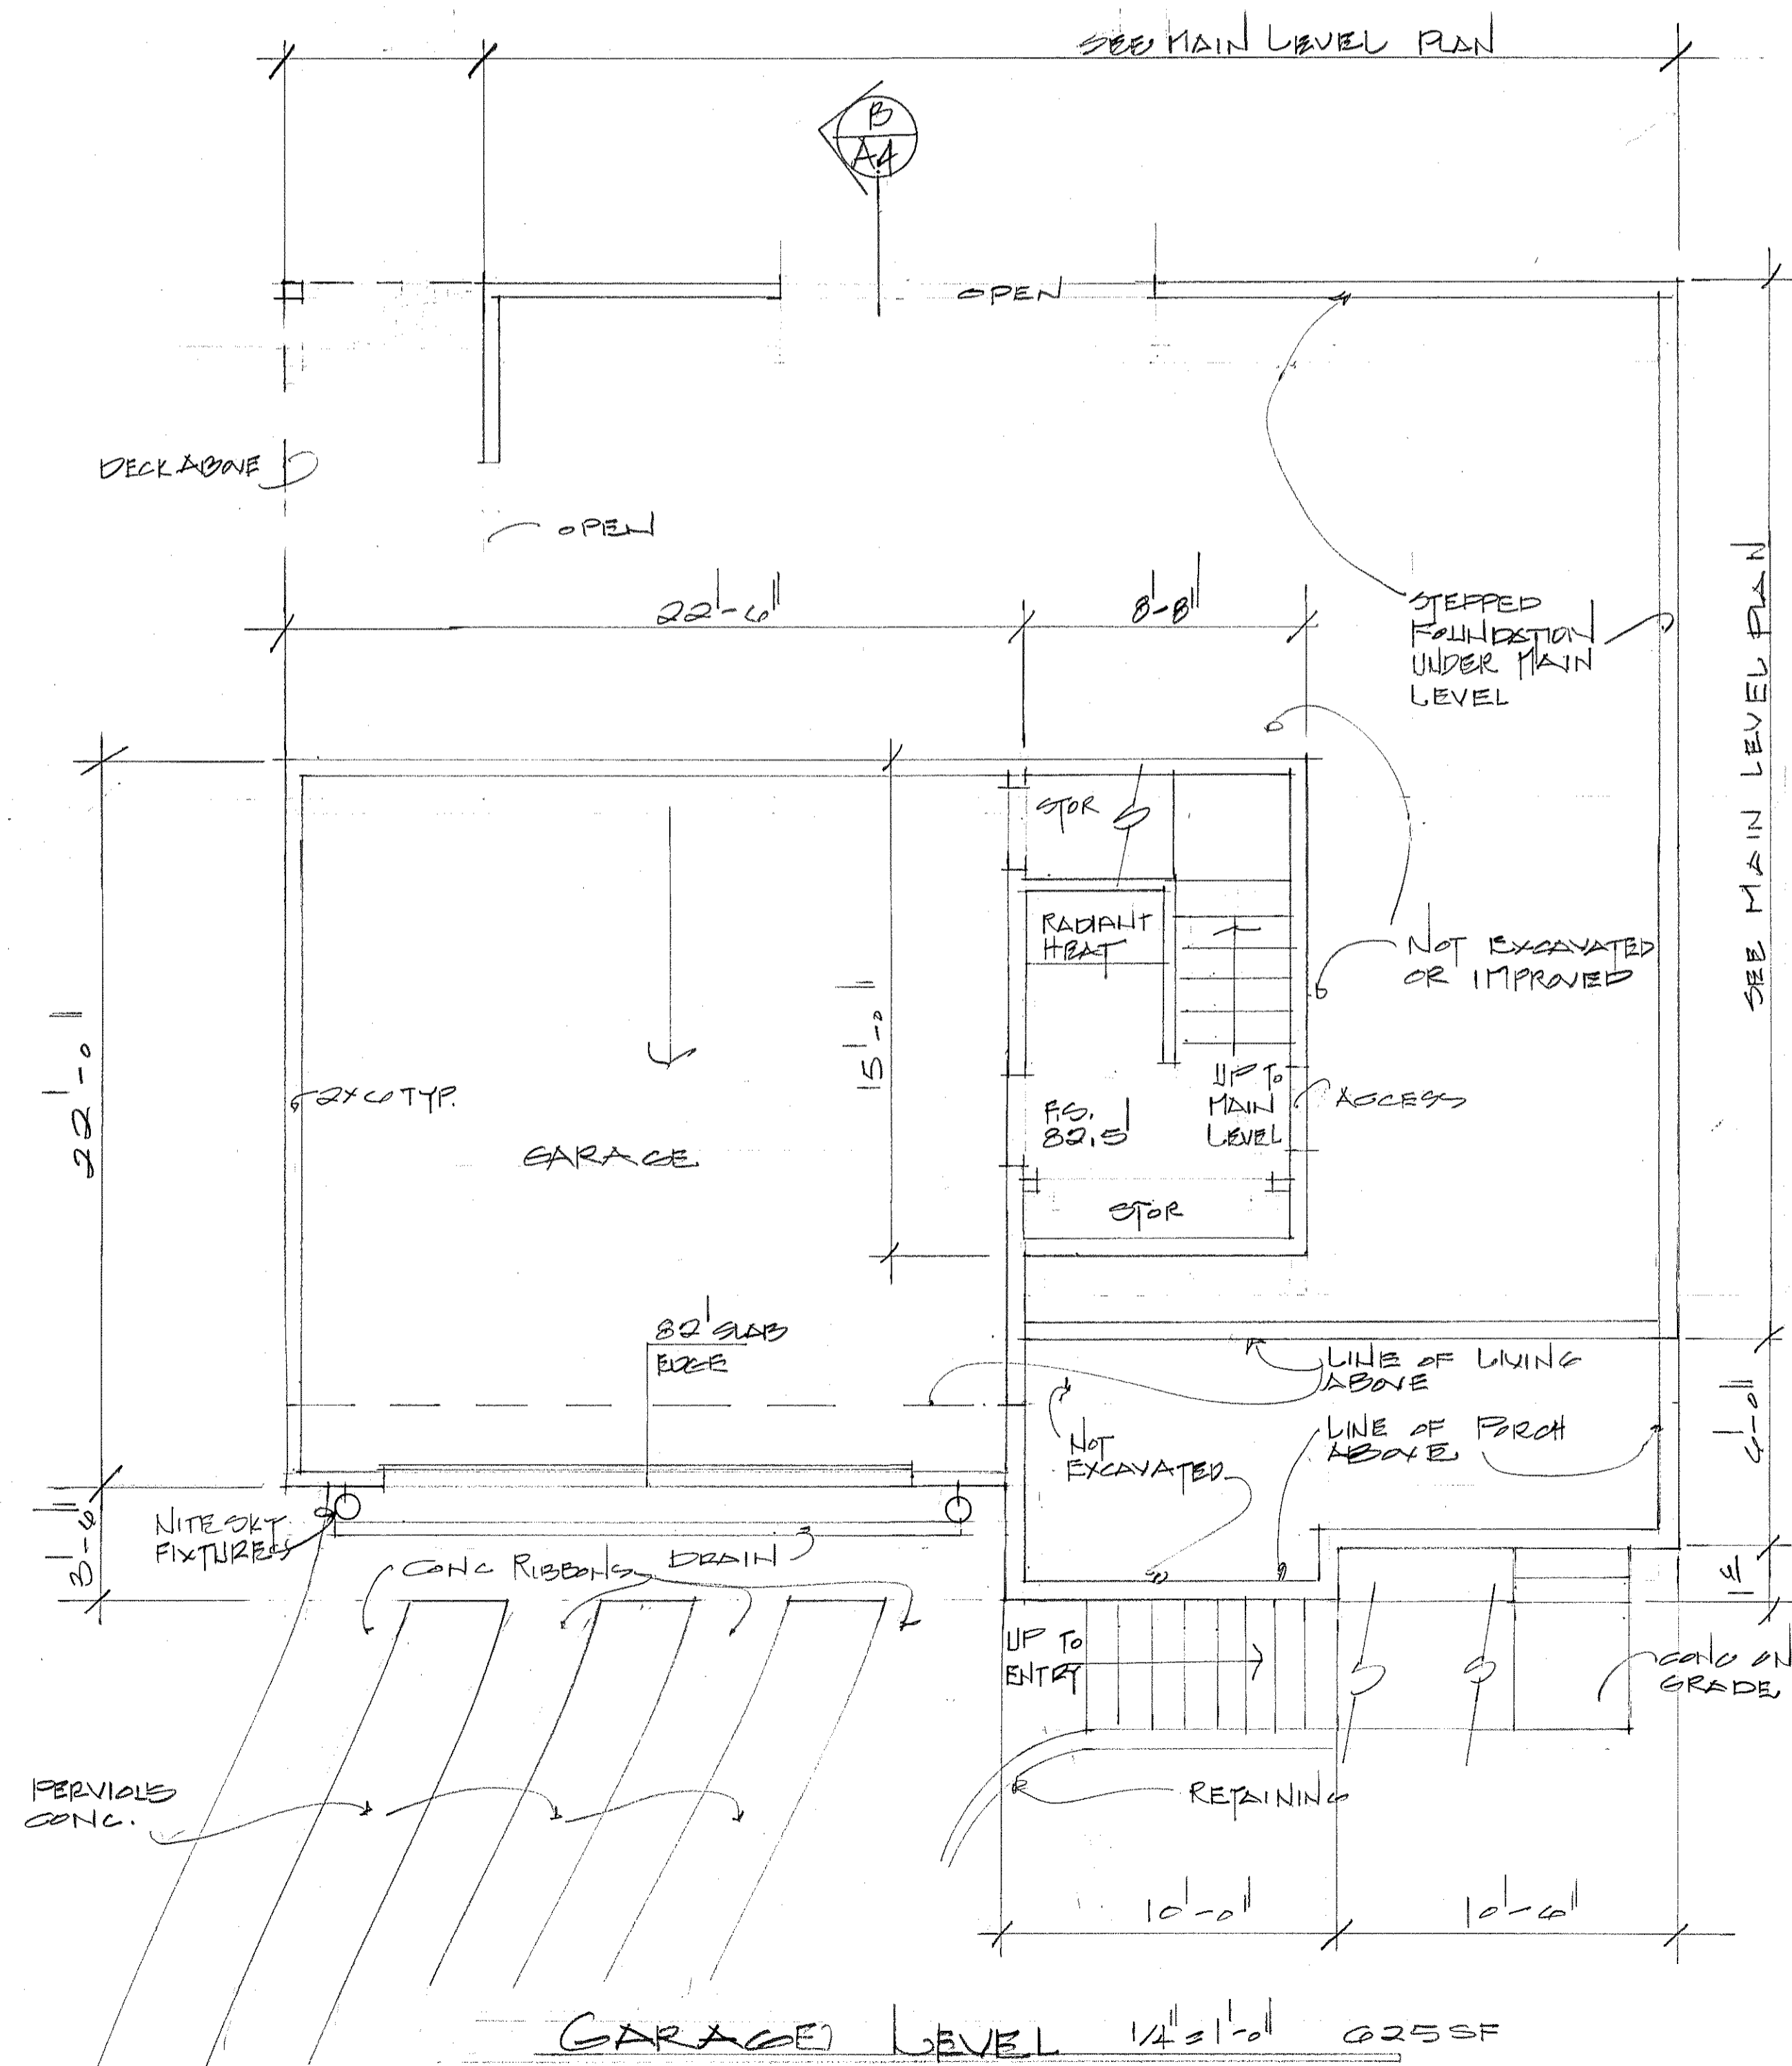


A NEW RESIDENCE FOR
PAUL MC GREGOR
 1900 EAST STREET
 MONTARA, CA. 94037 APN: 037-015-090

Plans Prepared By:
Anne Gustin Design, Inc.
 3414 Scenic Drive
 Napa, CA 94958
 Phone: (707)251-9900
 Fax: (707)251-9125
 anne_gustin@alco.com

DR
 DR
 PRINTED
 DEC 22, 14
 5-14-14

SHEET NO
 A.2.
 OF 6

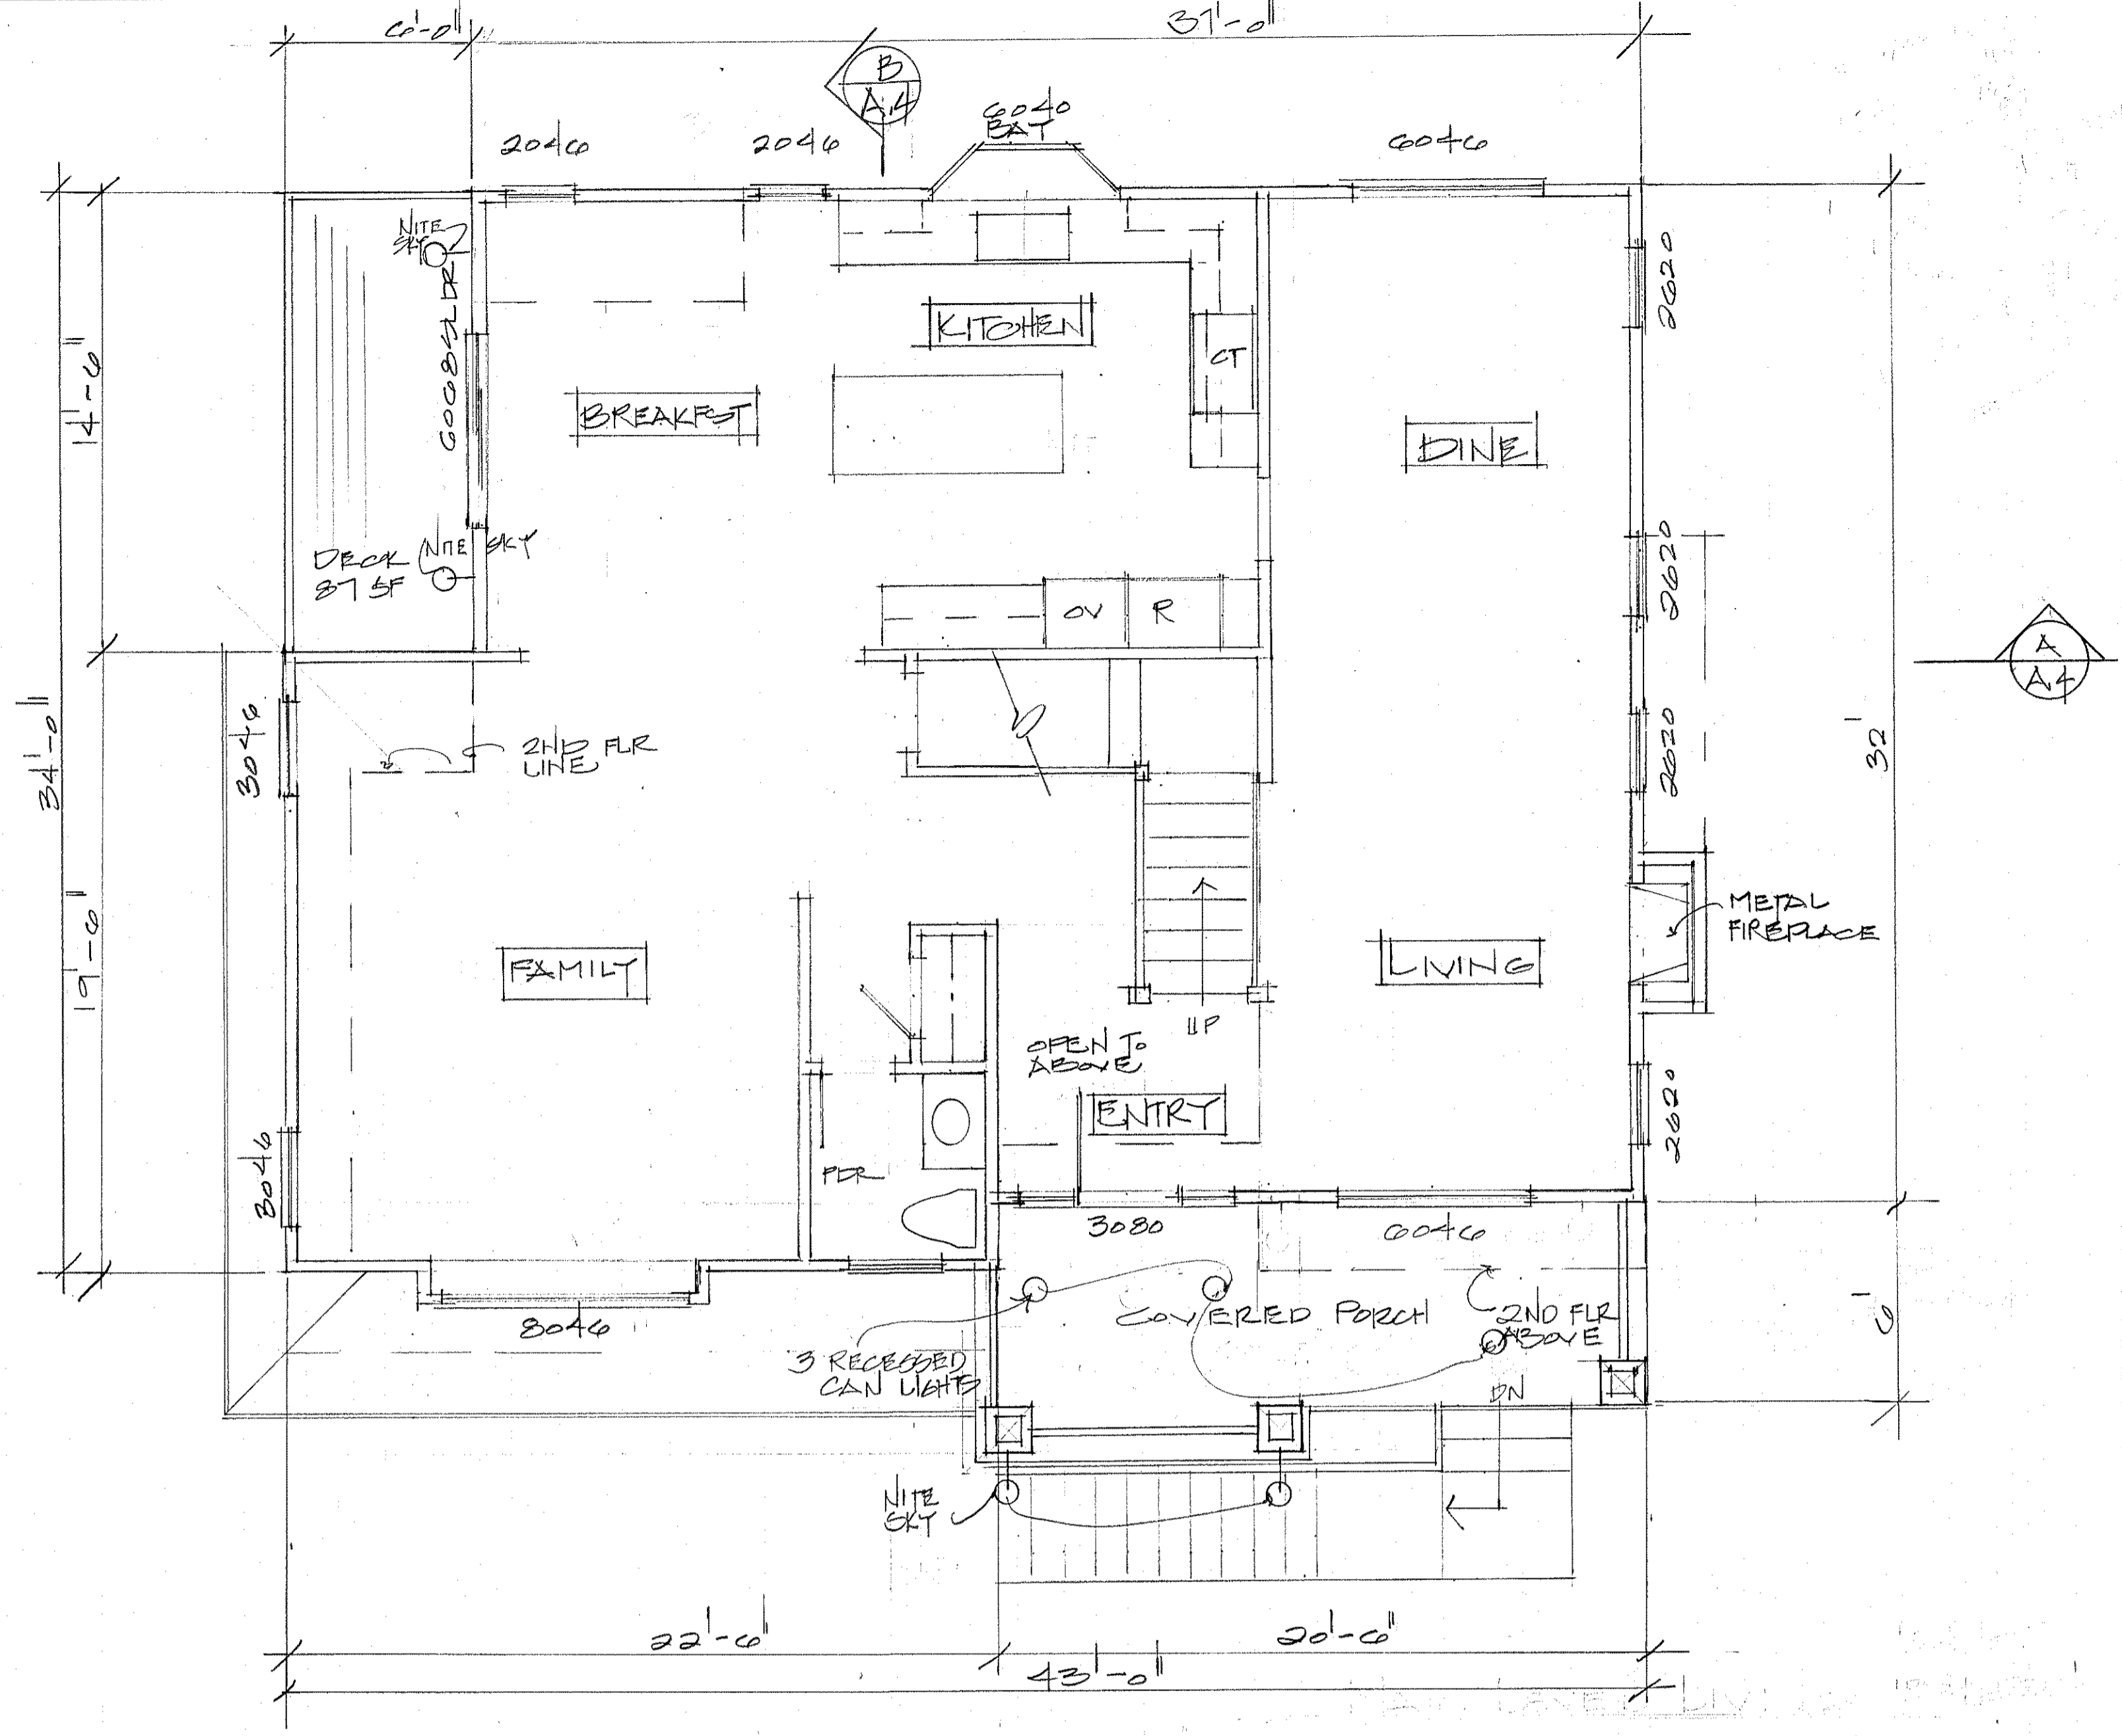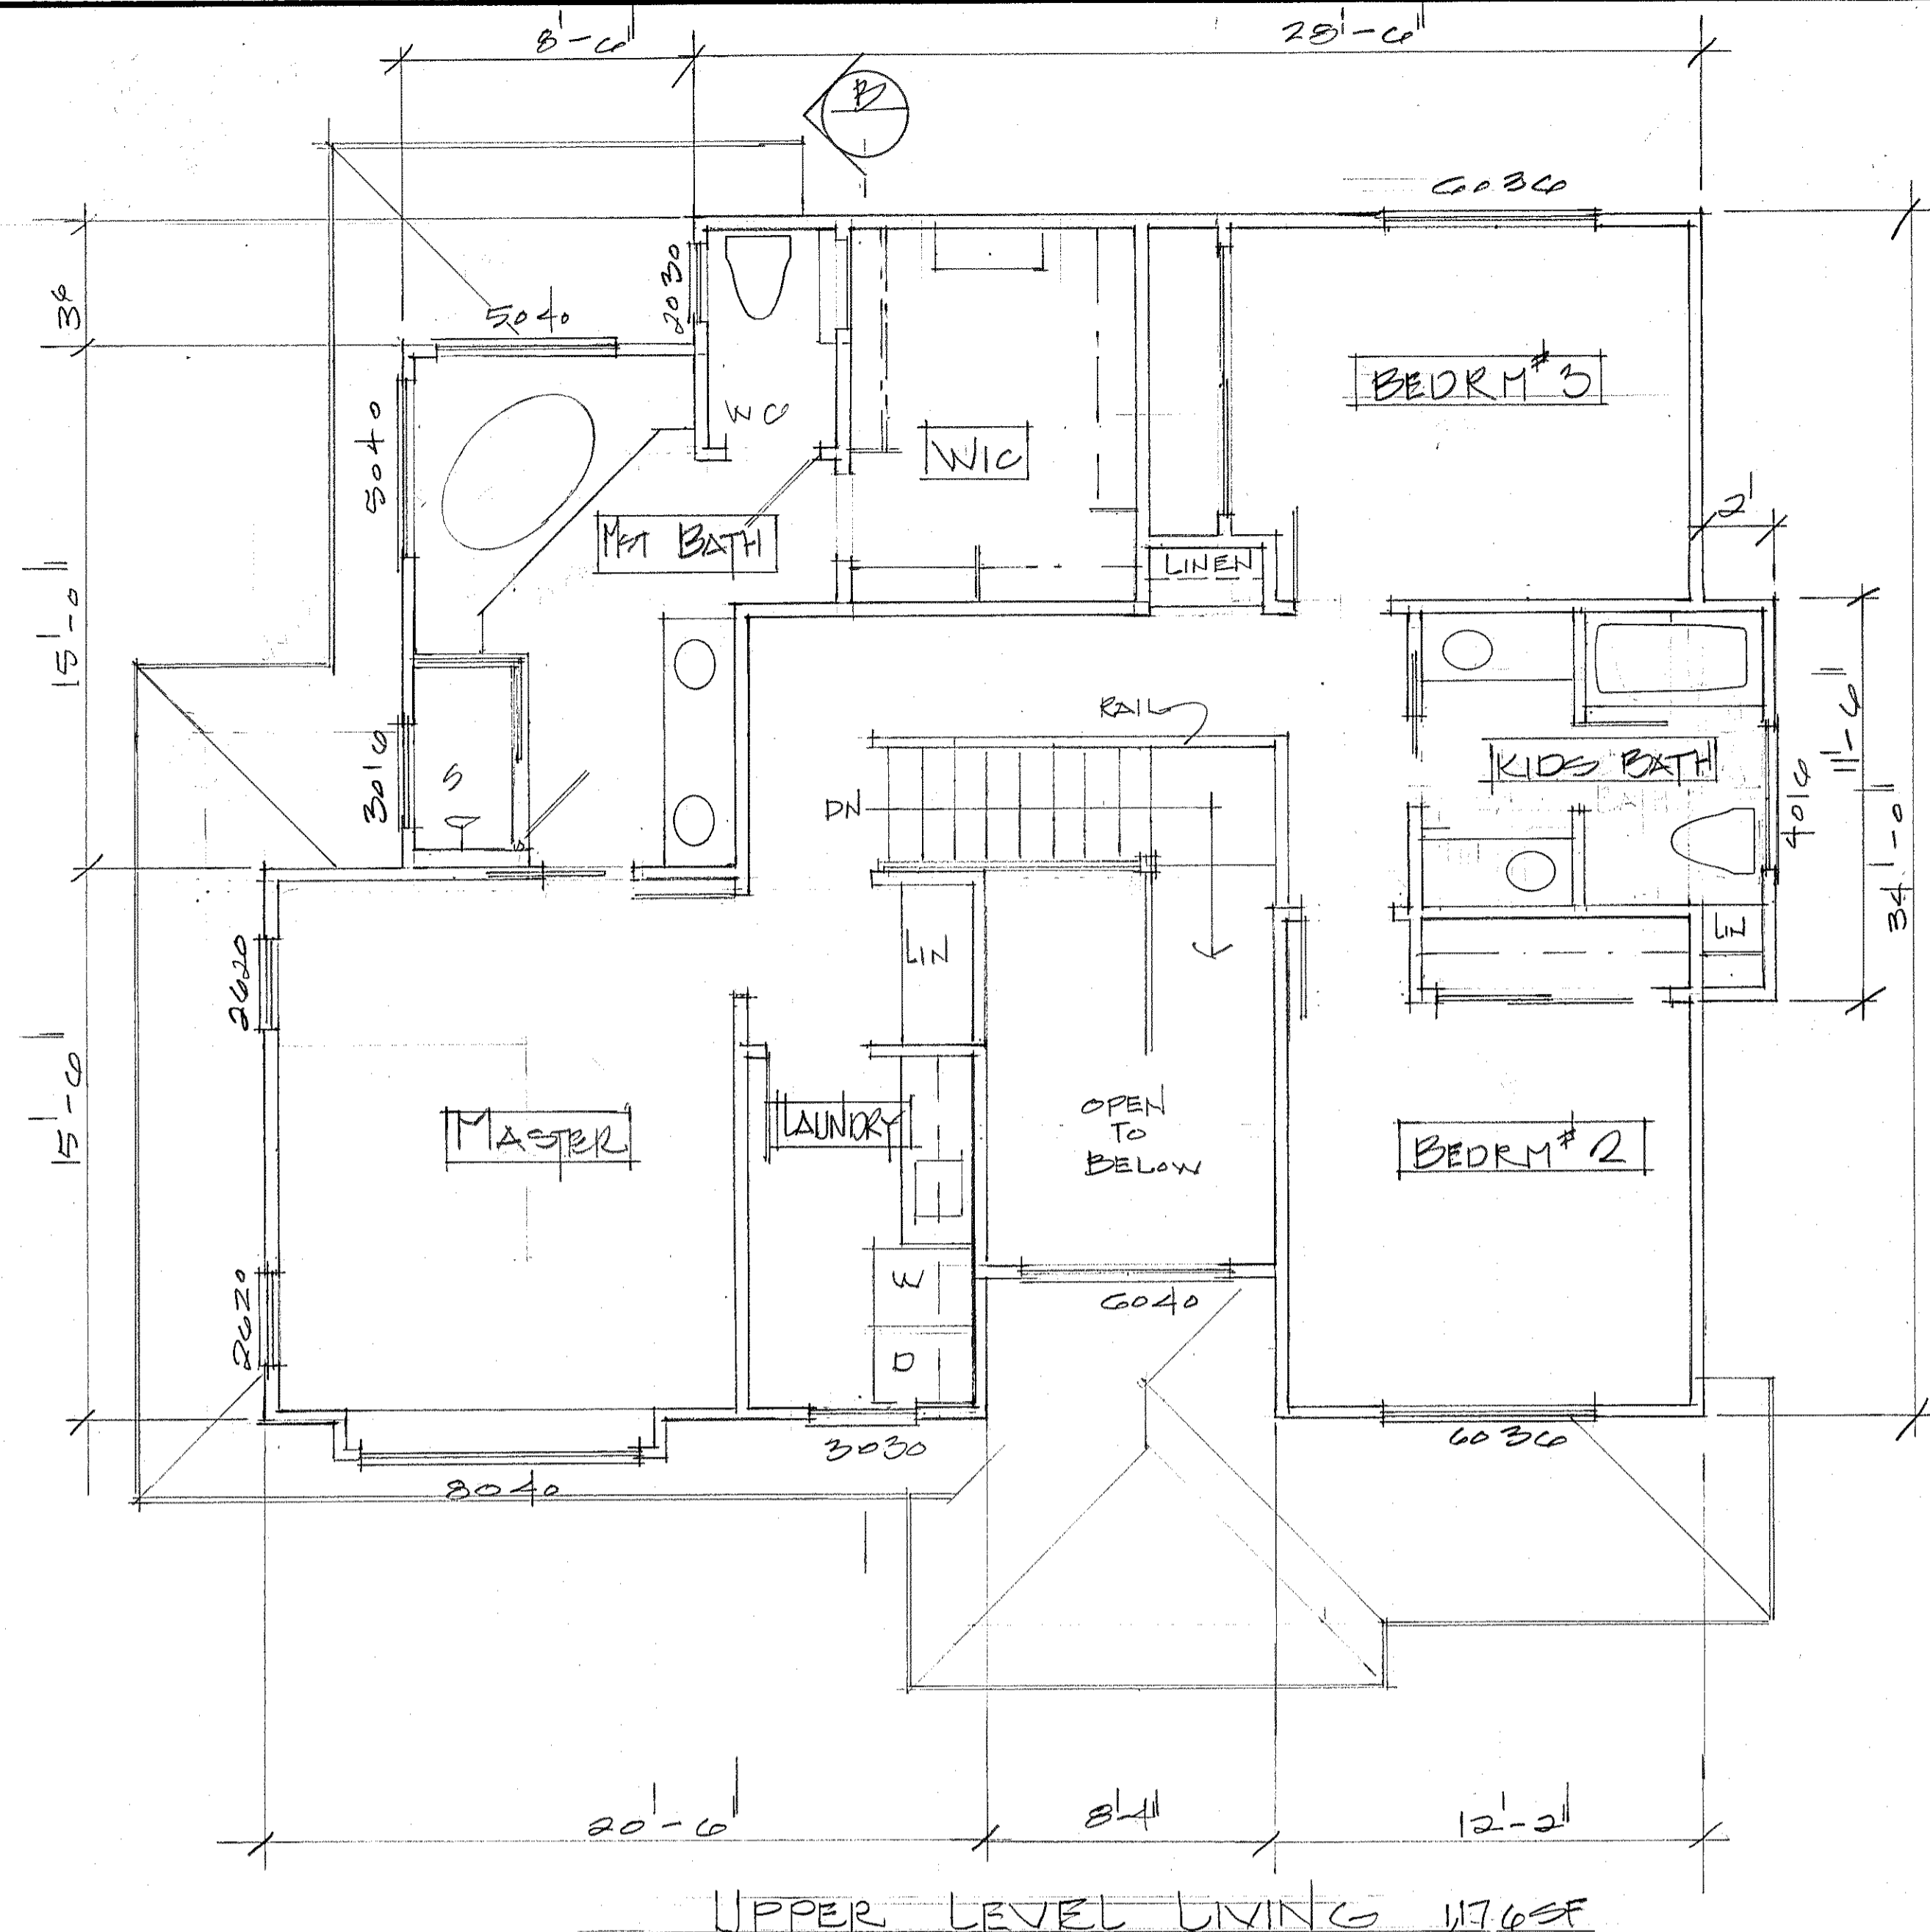


MAIN LEVEL LIVING
 SCALE 1/4" = 1'-0"
 LIVING 1,291 SF
 PORCH 146 SF INCLUDED IN FAR (146 SF ACTUAL)
 DECK 87 SF

A NEW RESIDENCE FOR:
PAUL Mc GREGOR
 1900 EAST STREET
 MONTARA, CA. 94037 APN: 037-015-090


Plans Prepared By:
Anne Gustin Design, Inc.
 3414 Scenic Drive
 Napa, CA 94556
 Phone: (707)251-9500
 Fax: (707)251-9123
 anne_gustin@yahoo.com

PRINTED
 11-19-14
 12-11-14
 08-22-14
 9-14-14
 DR

SHEET No
A.21
 OF 6

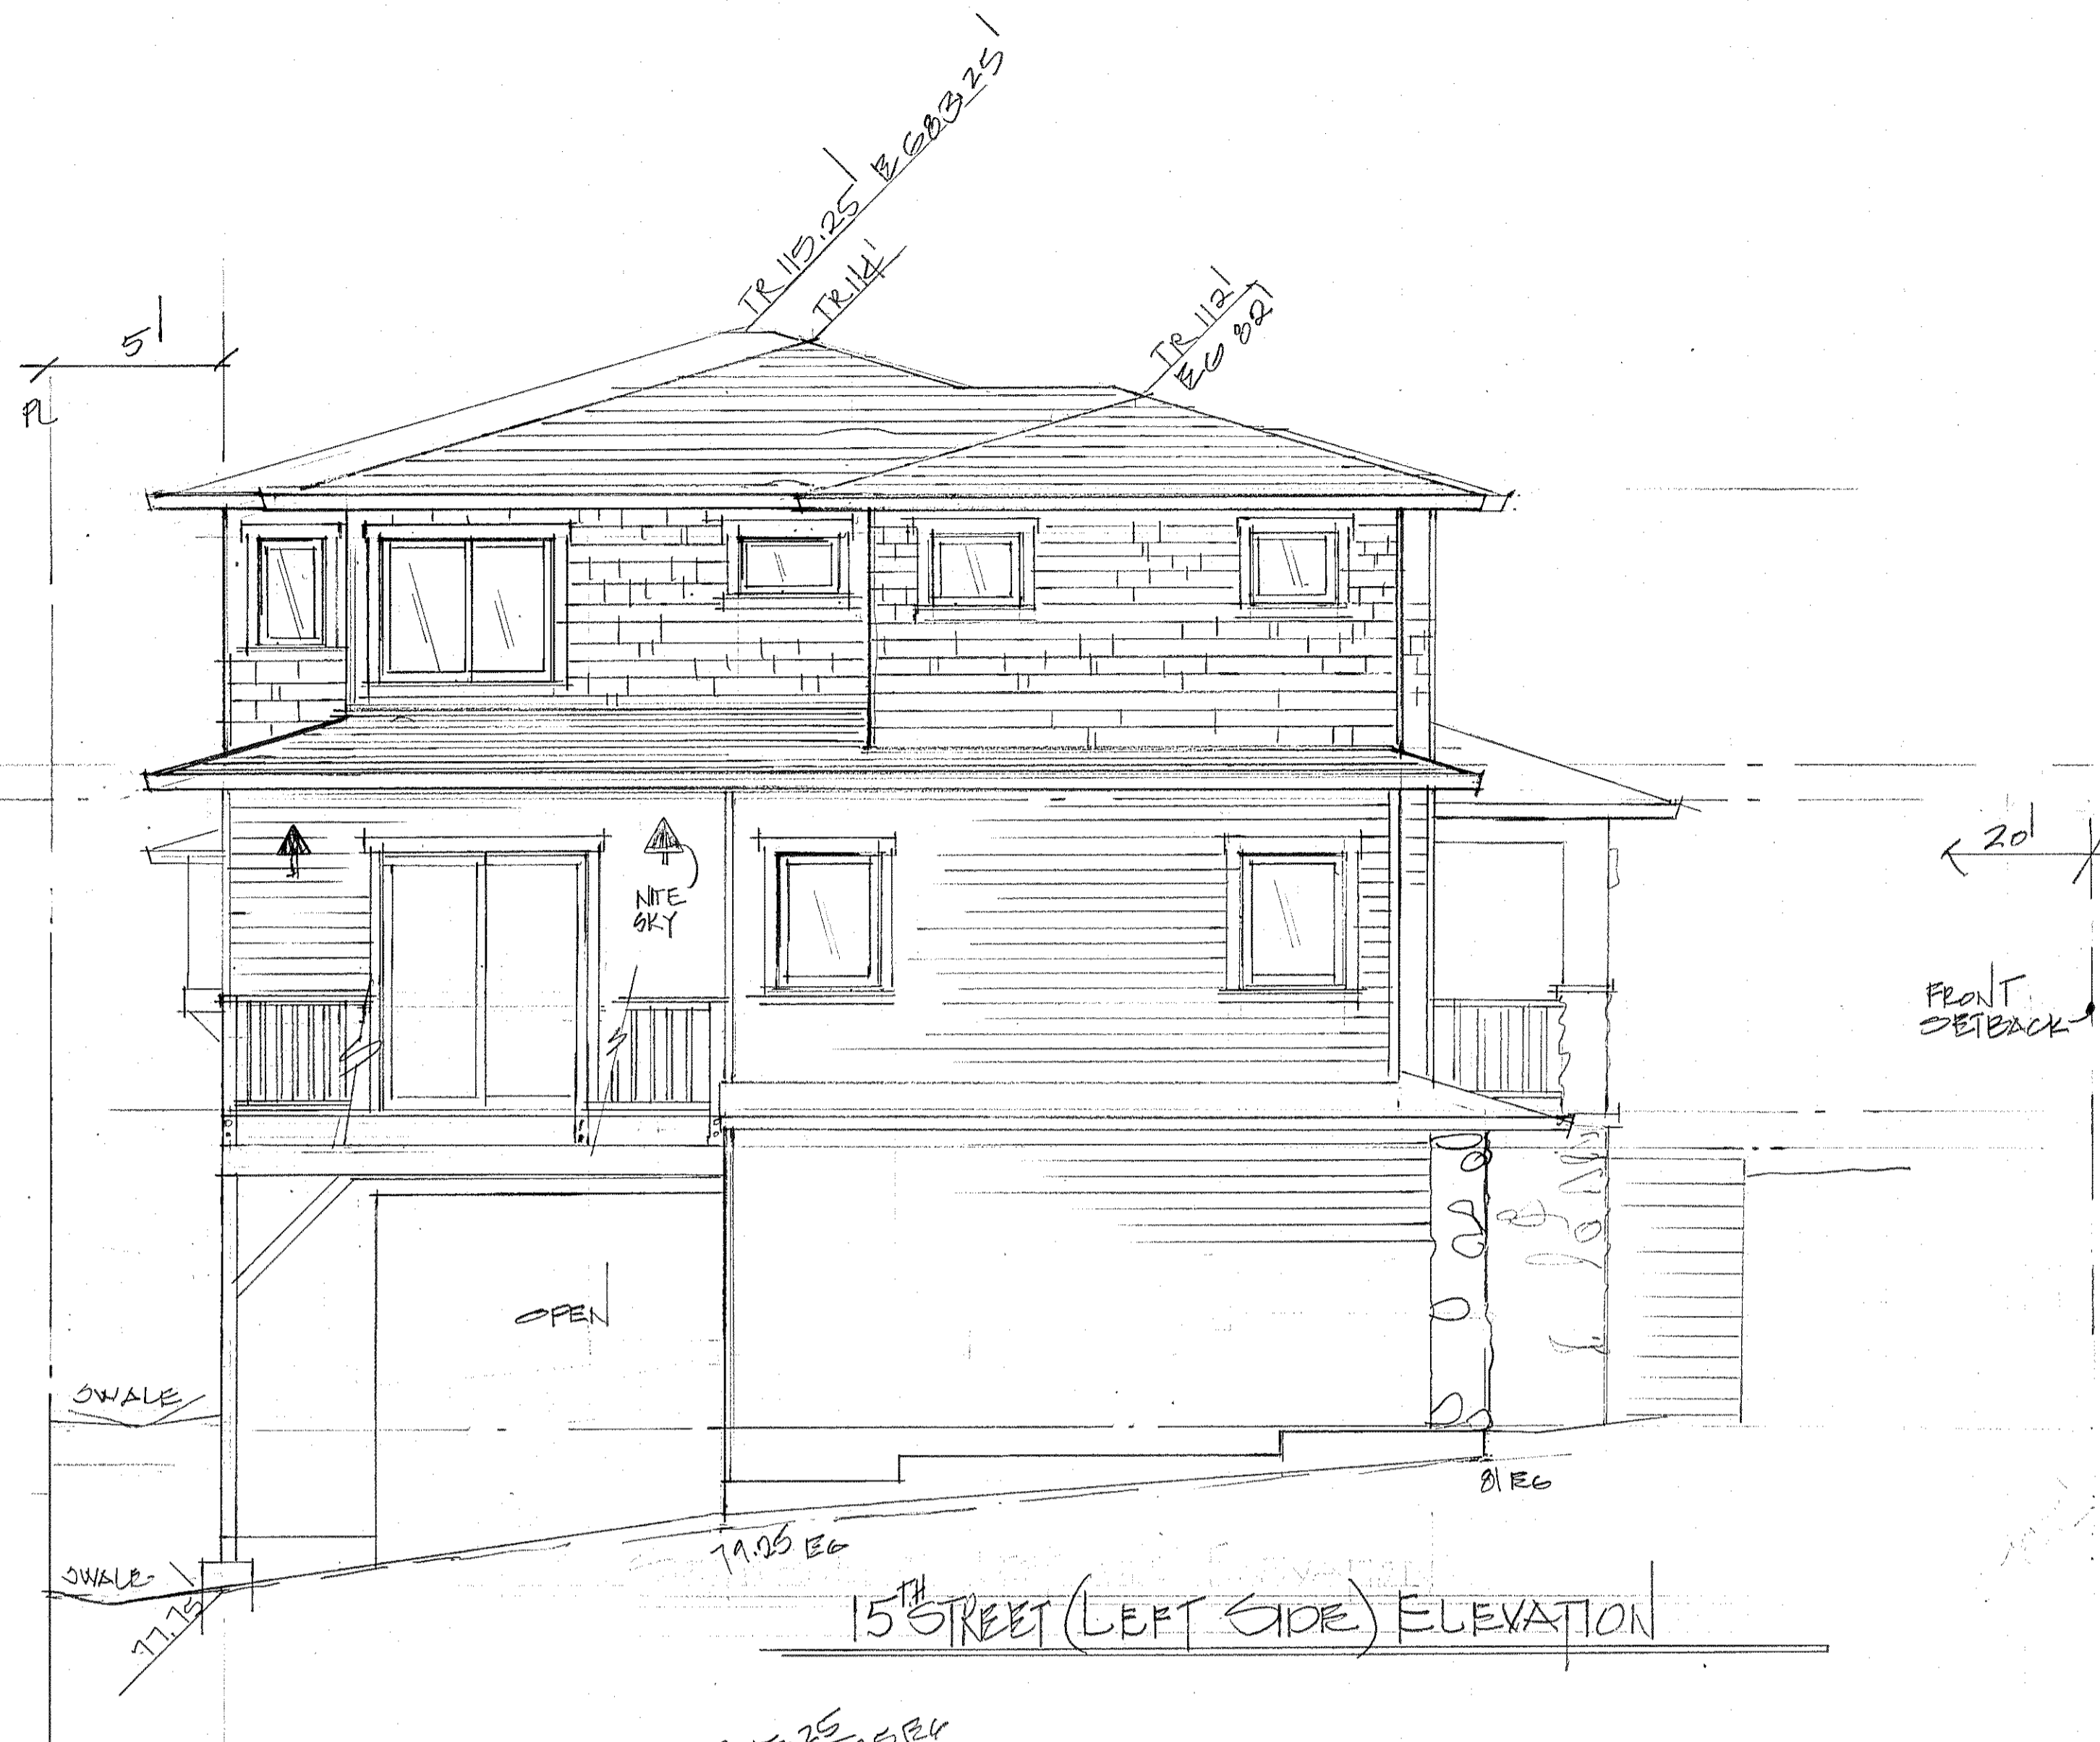


15TH STREET (LEFT SIDE) ELEVATION

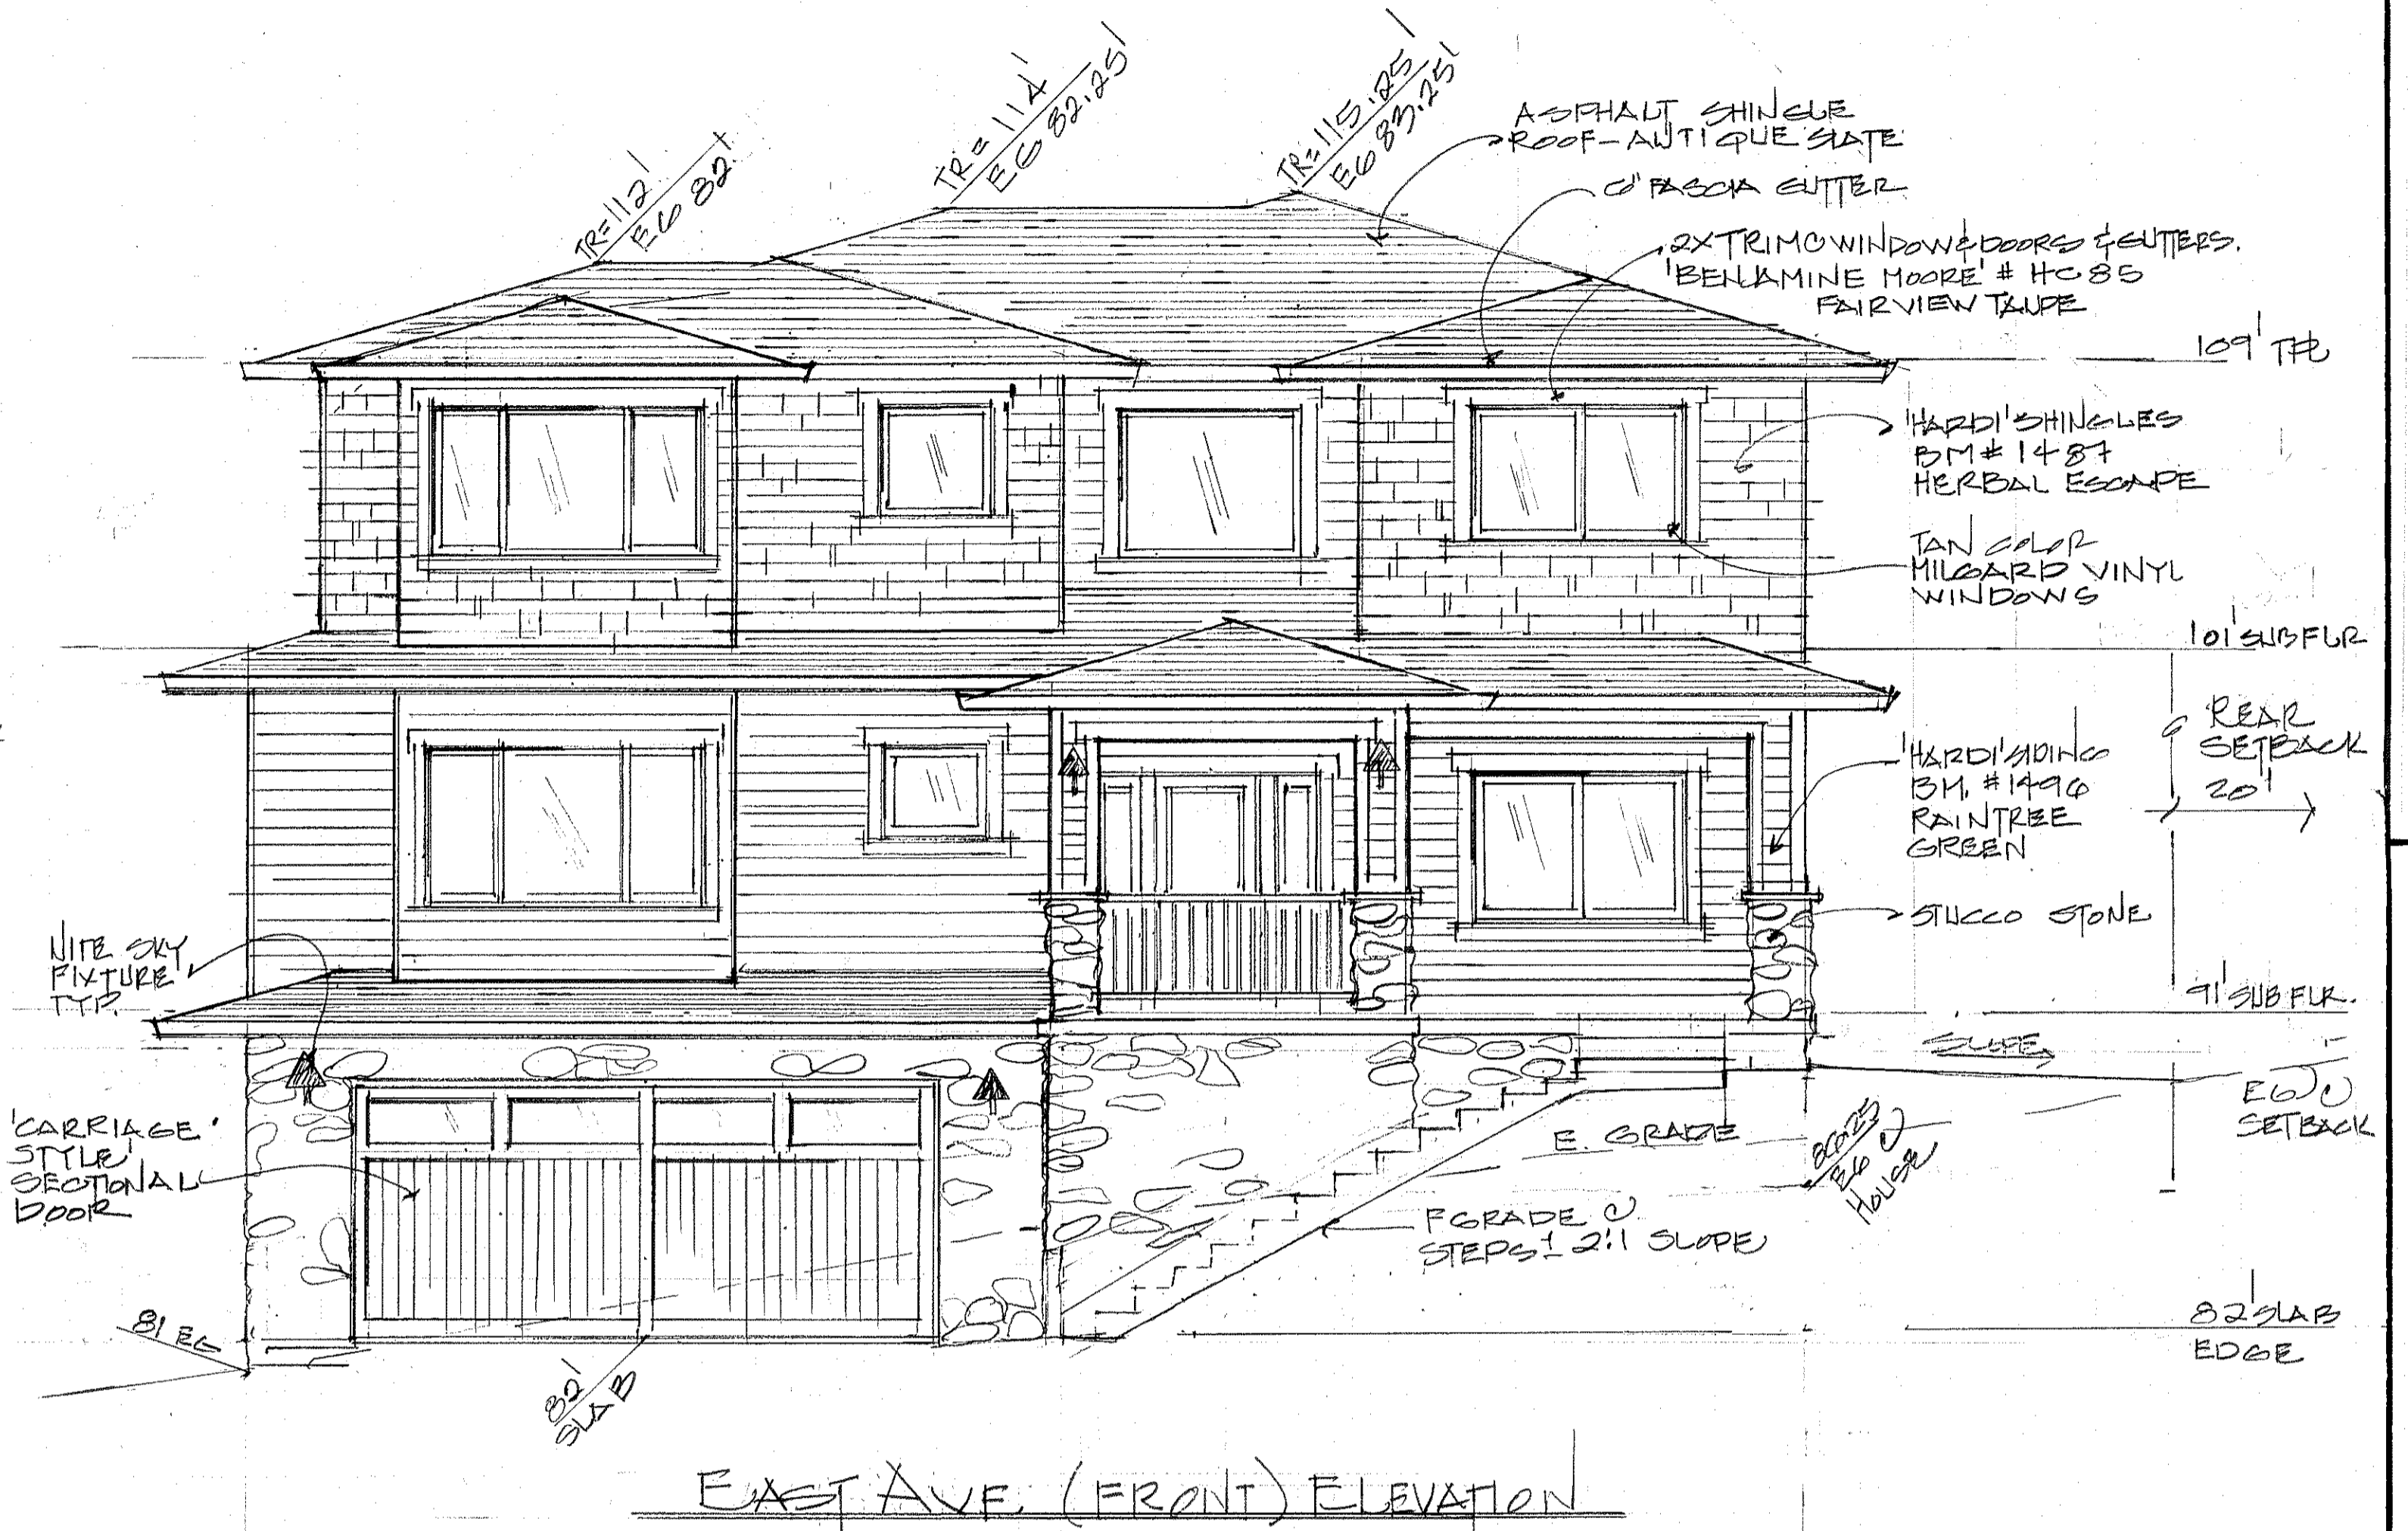

EAST AVE. (FRONT) ELEVATION



REAR ELEVATION

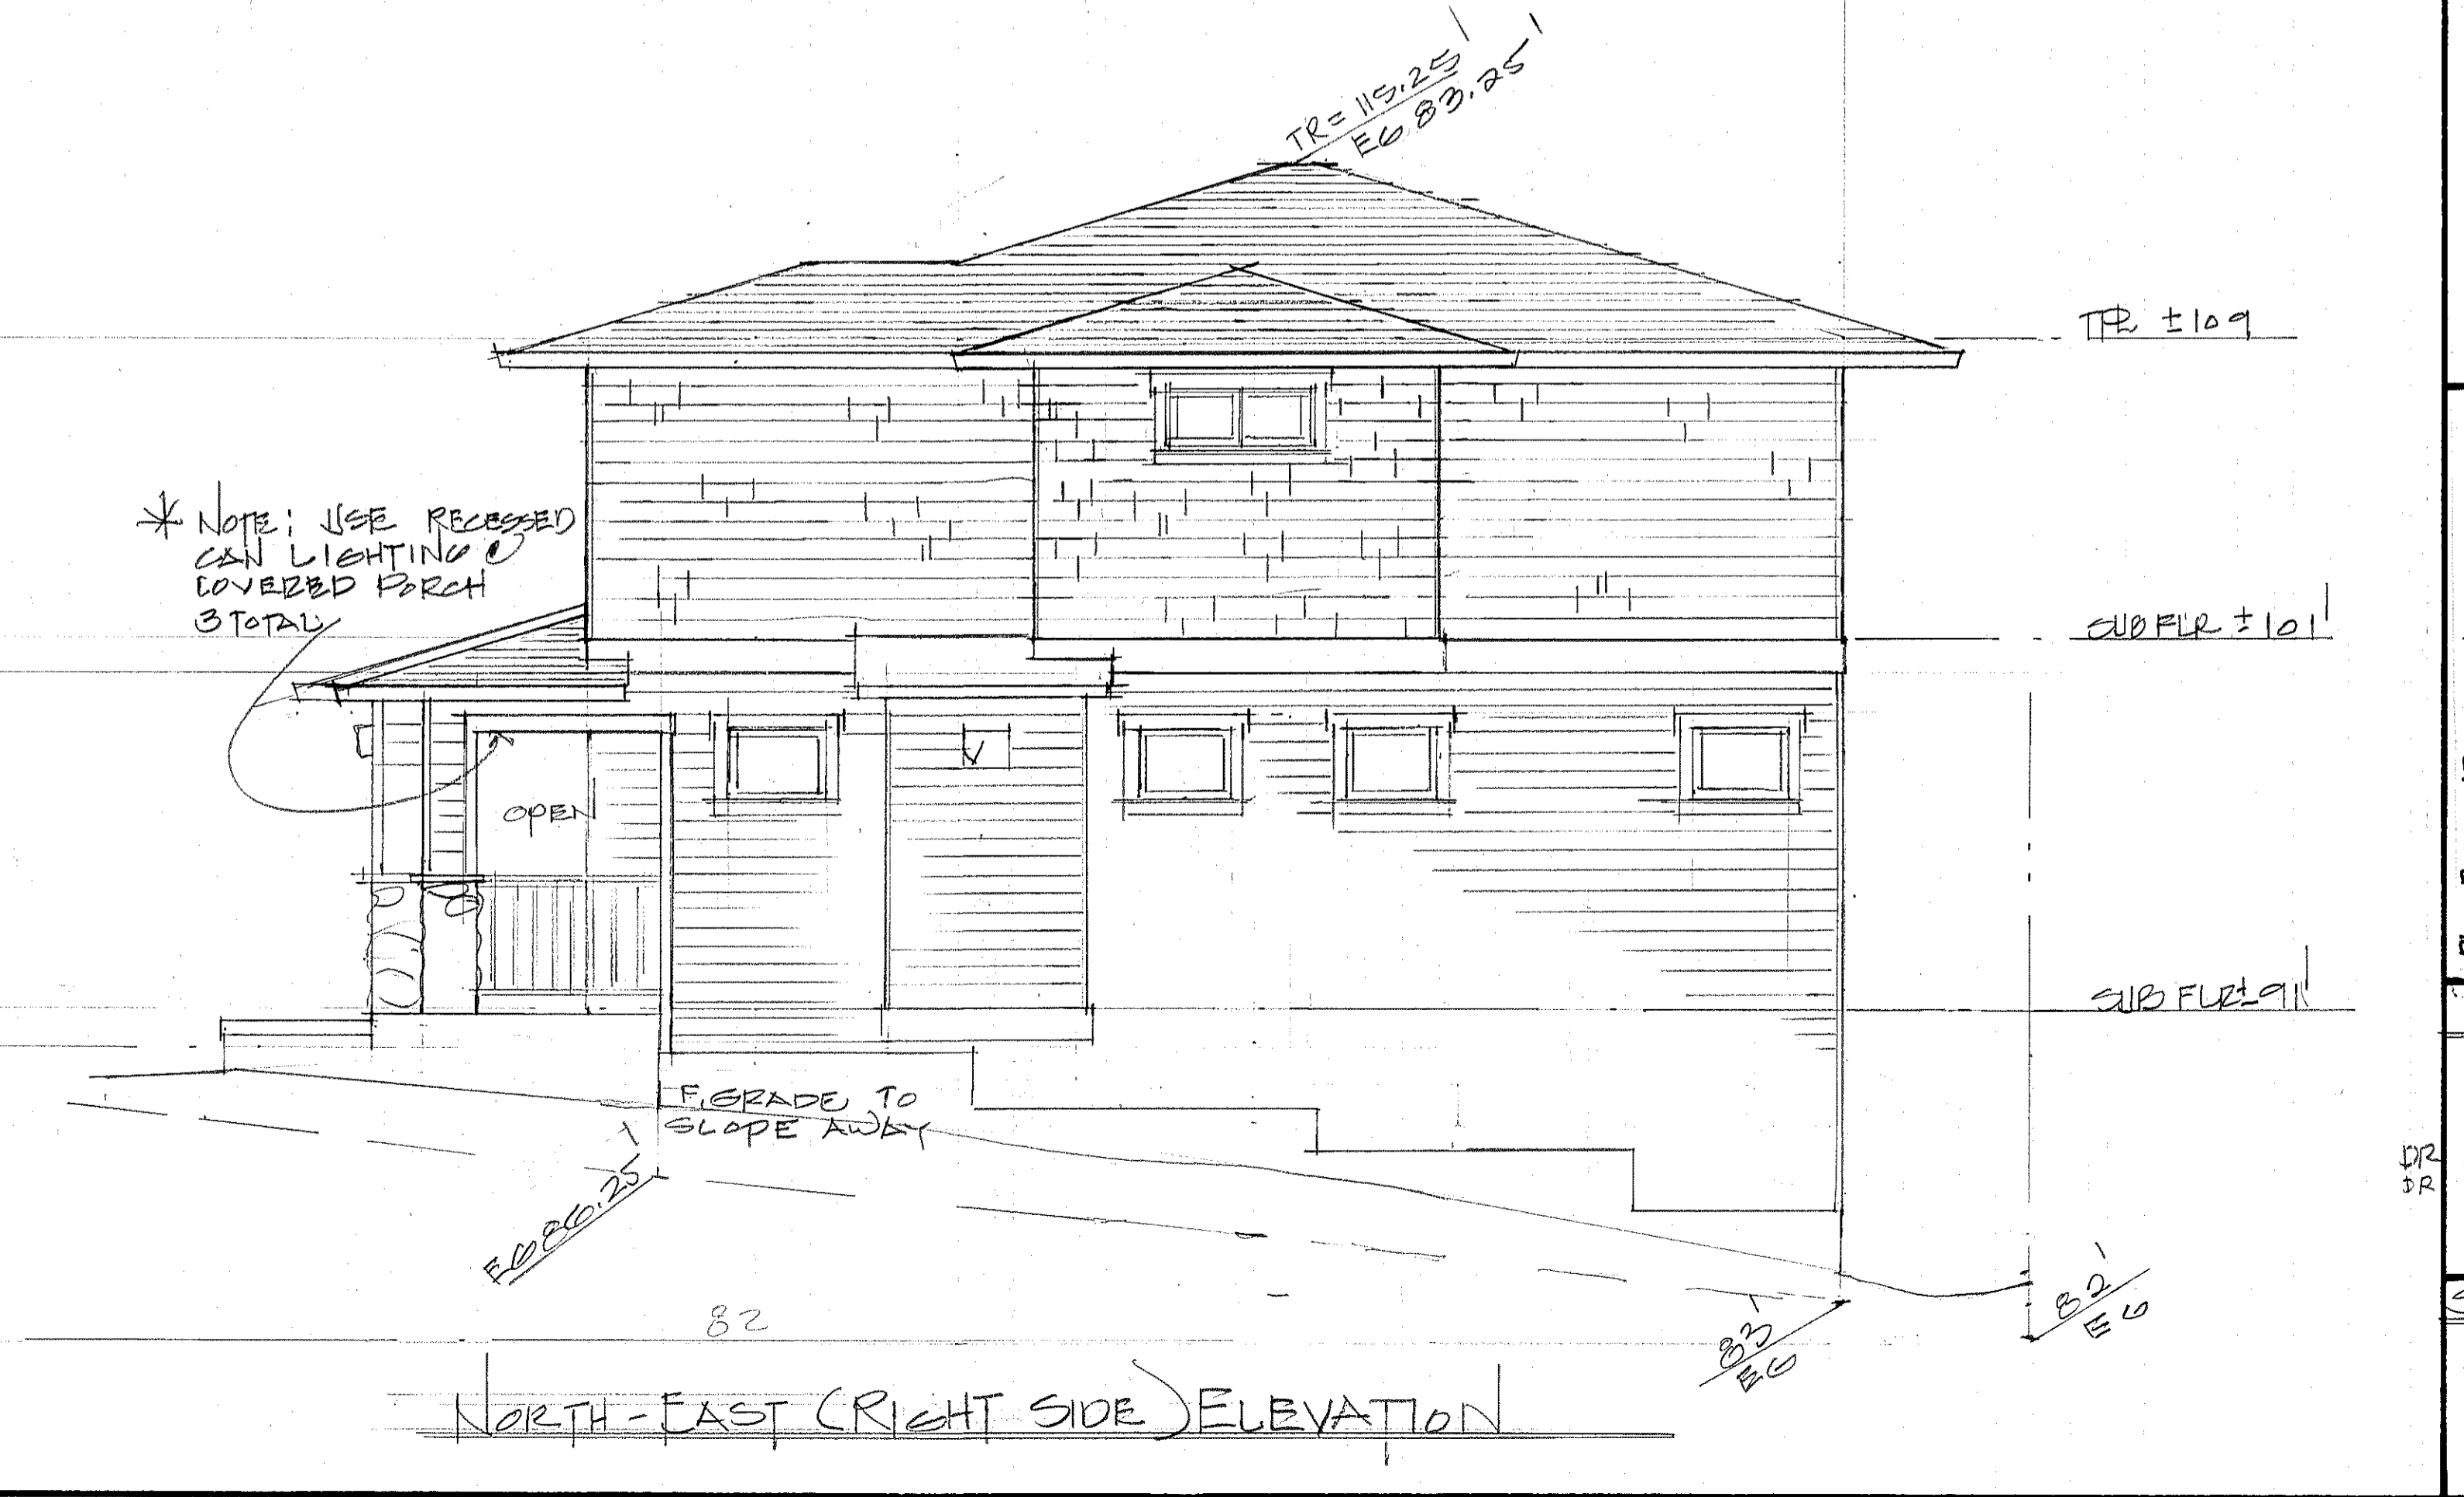


NORTH-EAST (RIGHT SIDE) ELEVATION

A NEW RESIDENCE FOR:
PAUL Mc GREGOR
 1900 EAST STREET
 MONTARA, CA. 94037 APN: 037-015-090


Plans Prepared By:
Anne Gustin Design, Inc.
 3414 Scenic Drive
 Napa, CA 94958
 Phone: (707)251-9500
 Fax: (707)251-9125
 anne_gustin@yahoo.com

PRINTED
 NOV. 25, 14
 12-1-14
 12-8-14
 DEC. 9-14
 DEC. 22, 14
 5-14-14


SHEET No
 A.23 of
 6

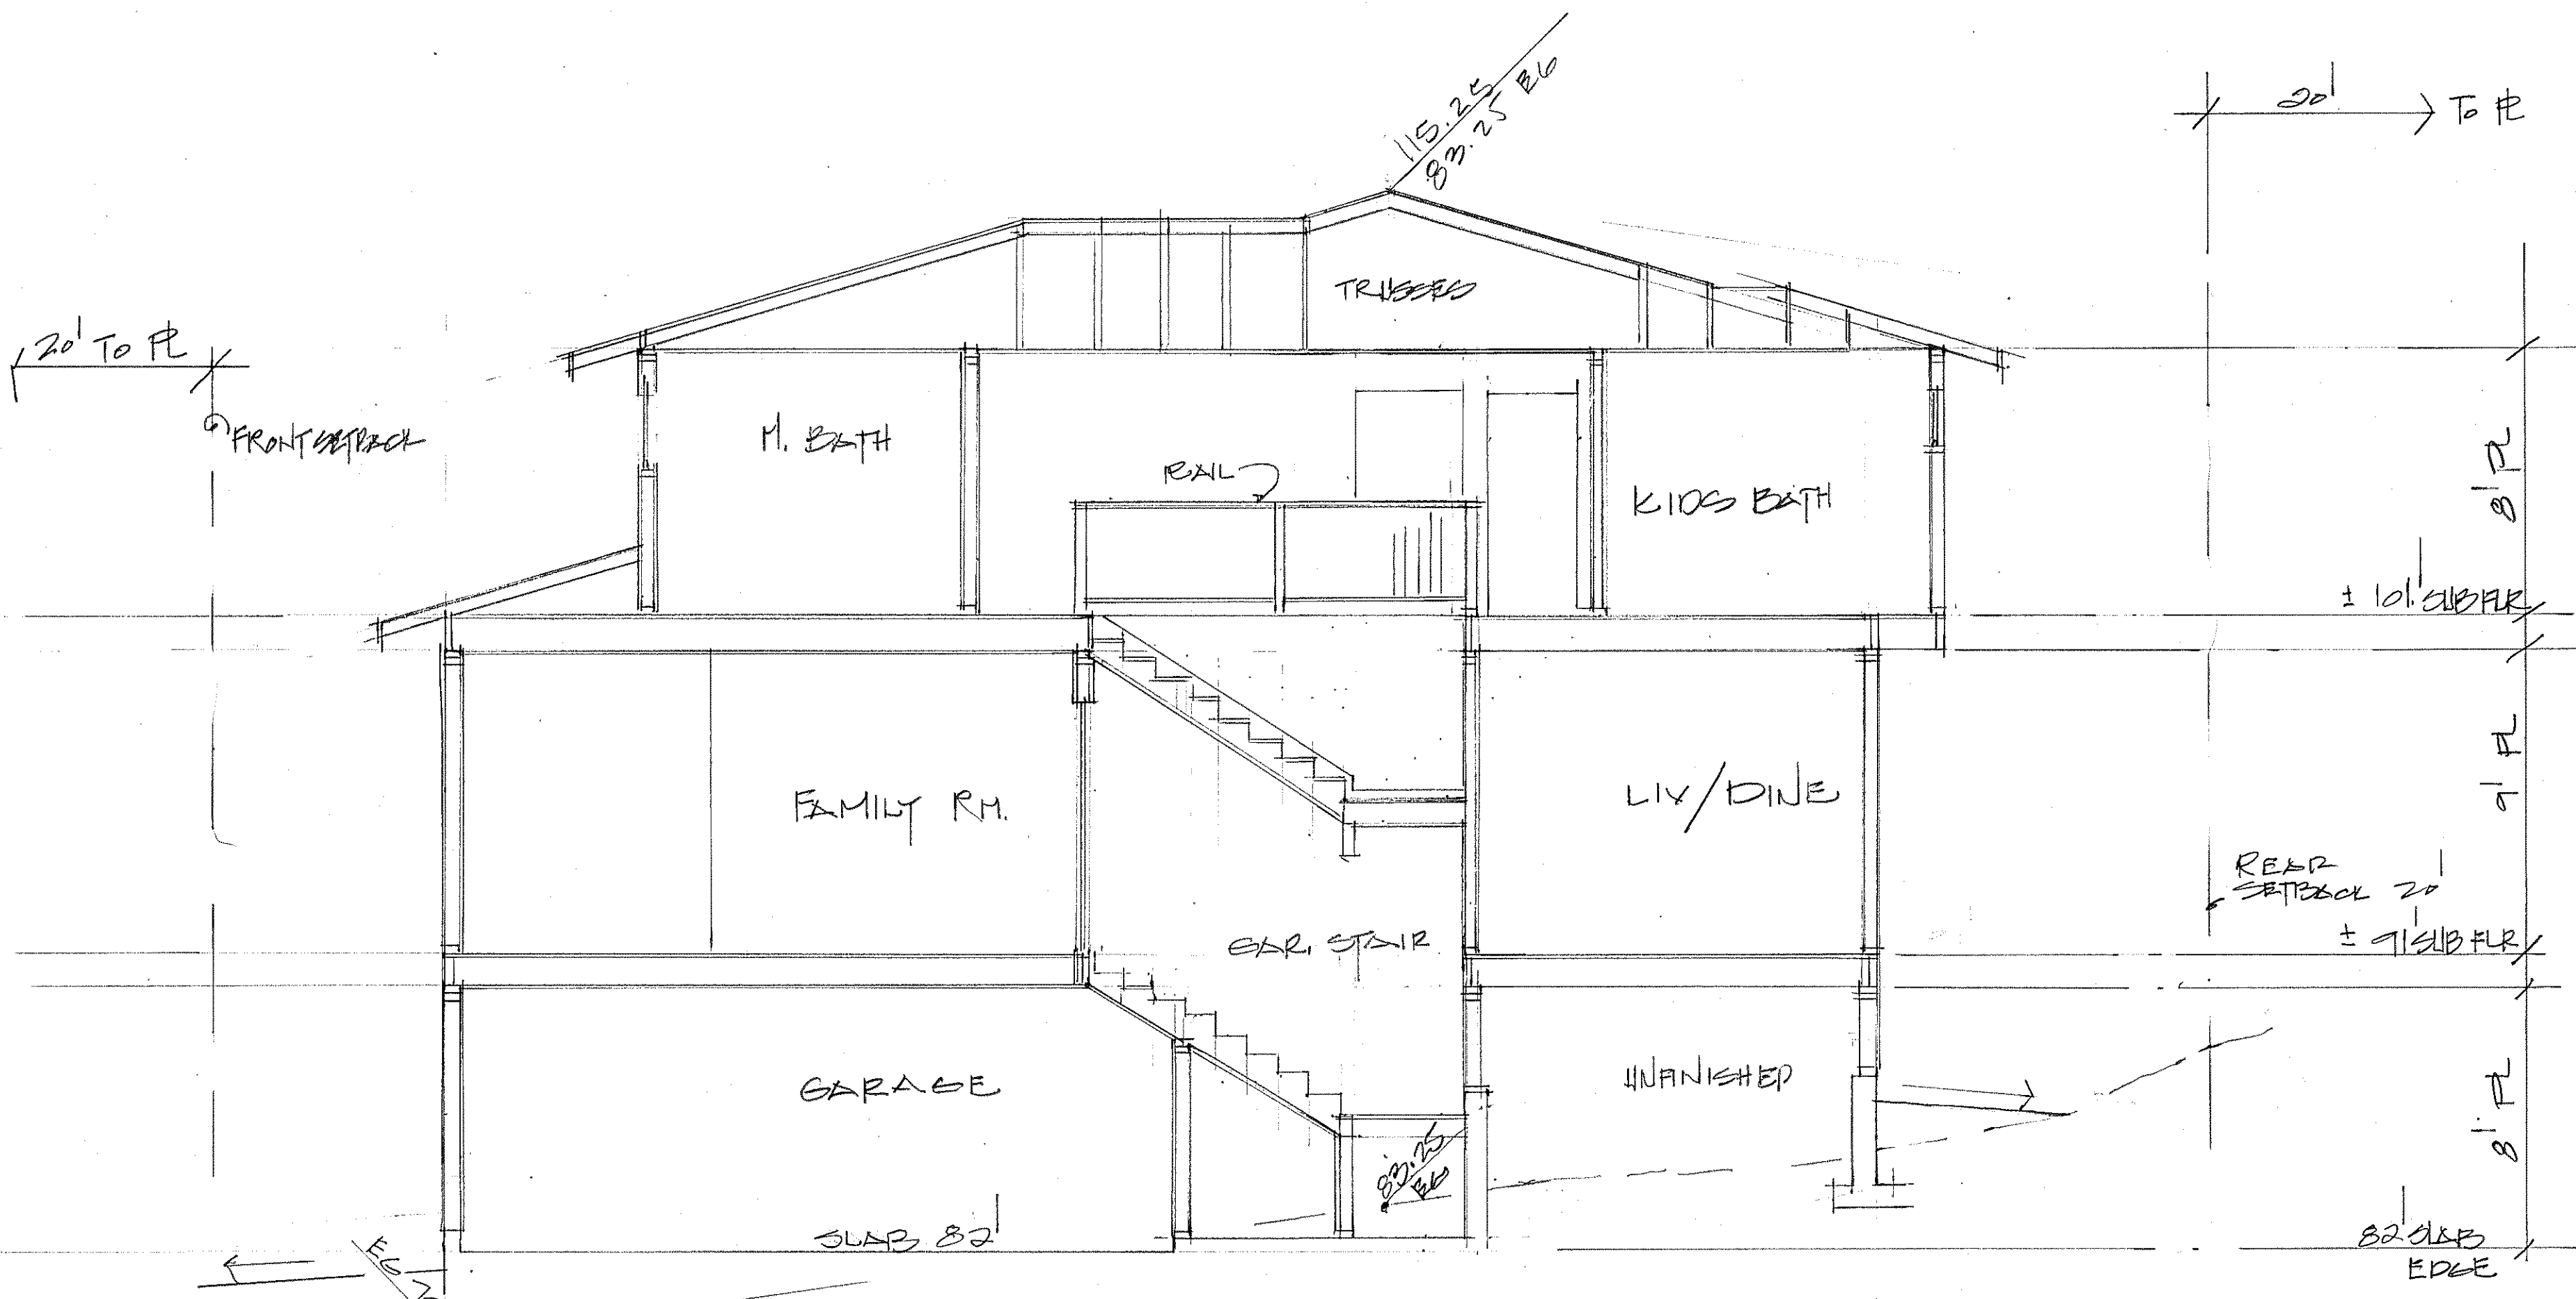

SECTION A 1/4" = 1'-0"

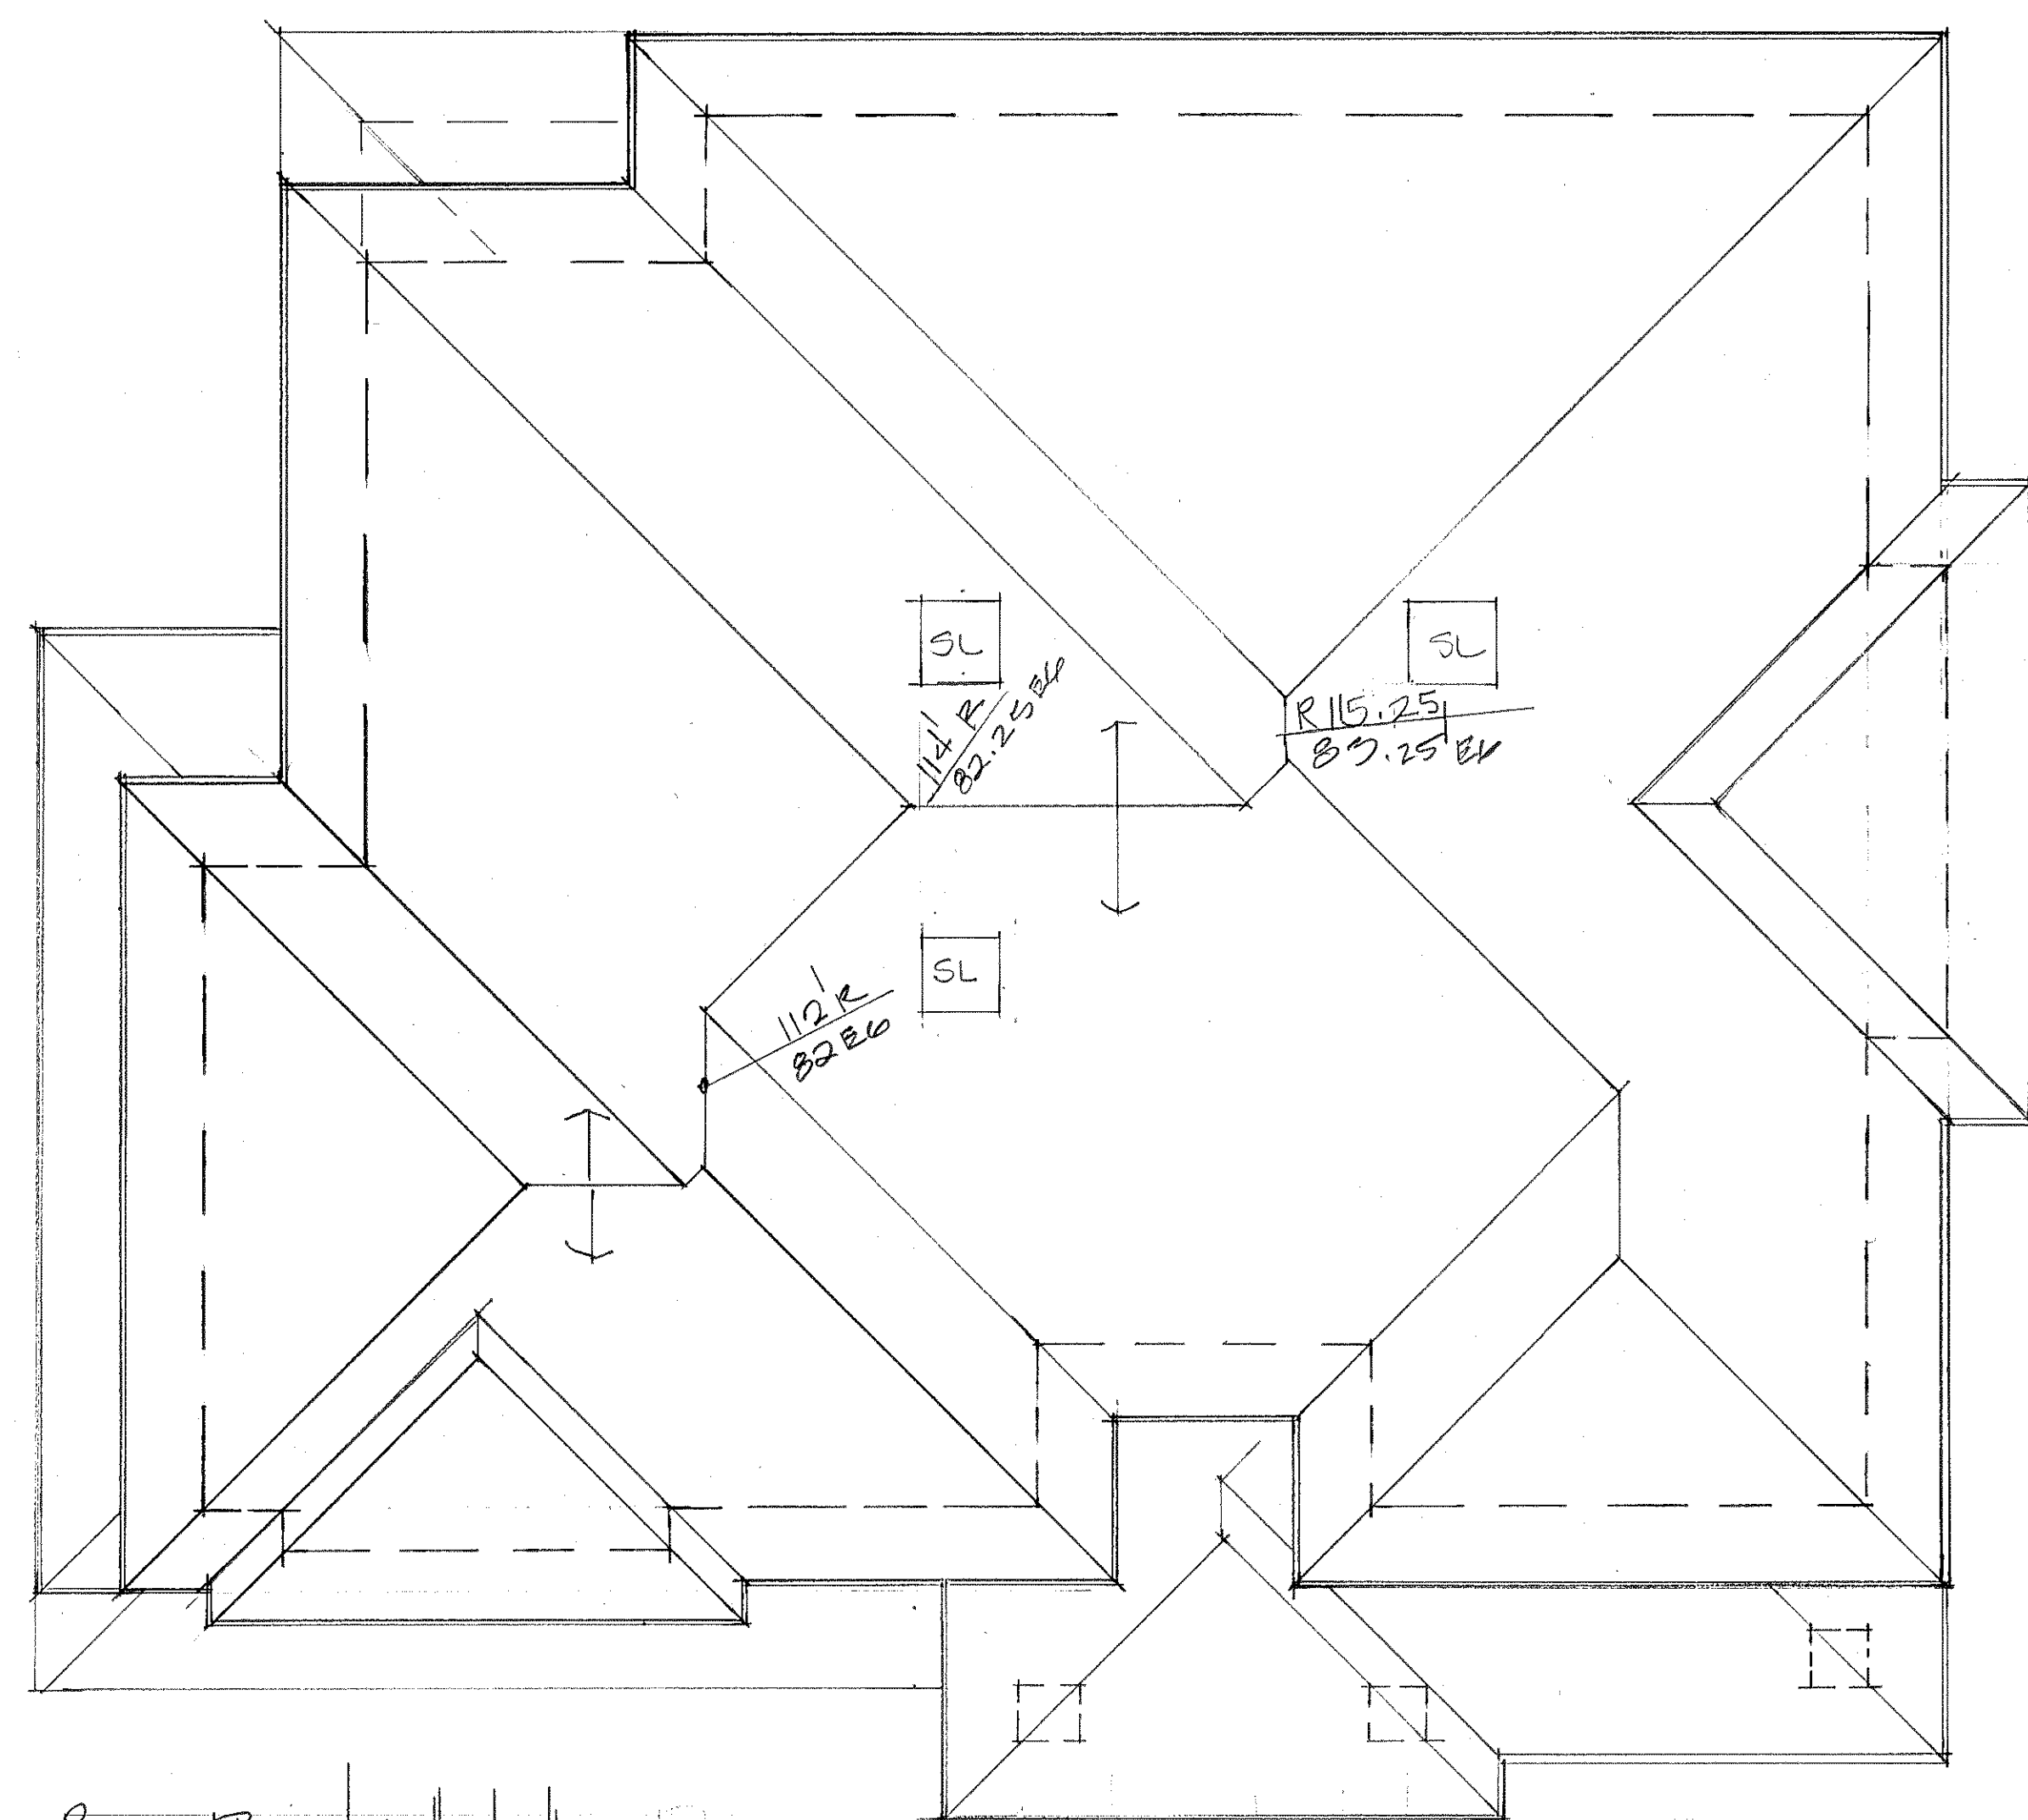

ROOF PLAN 1/4" = 1'-0"

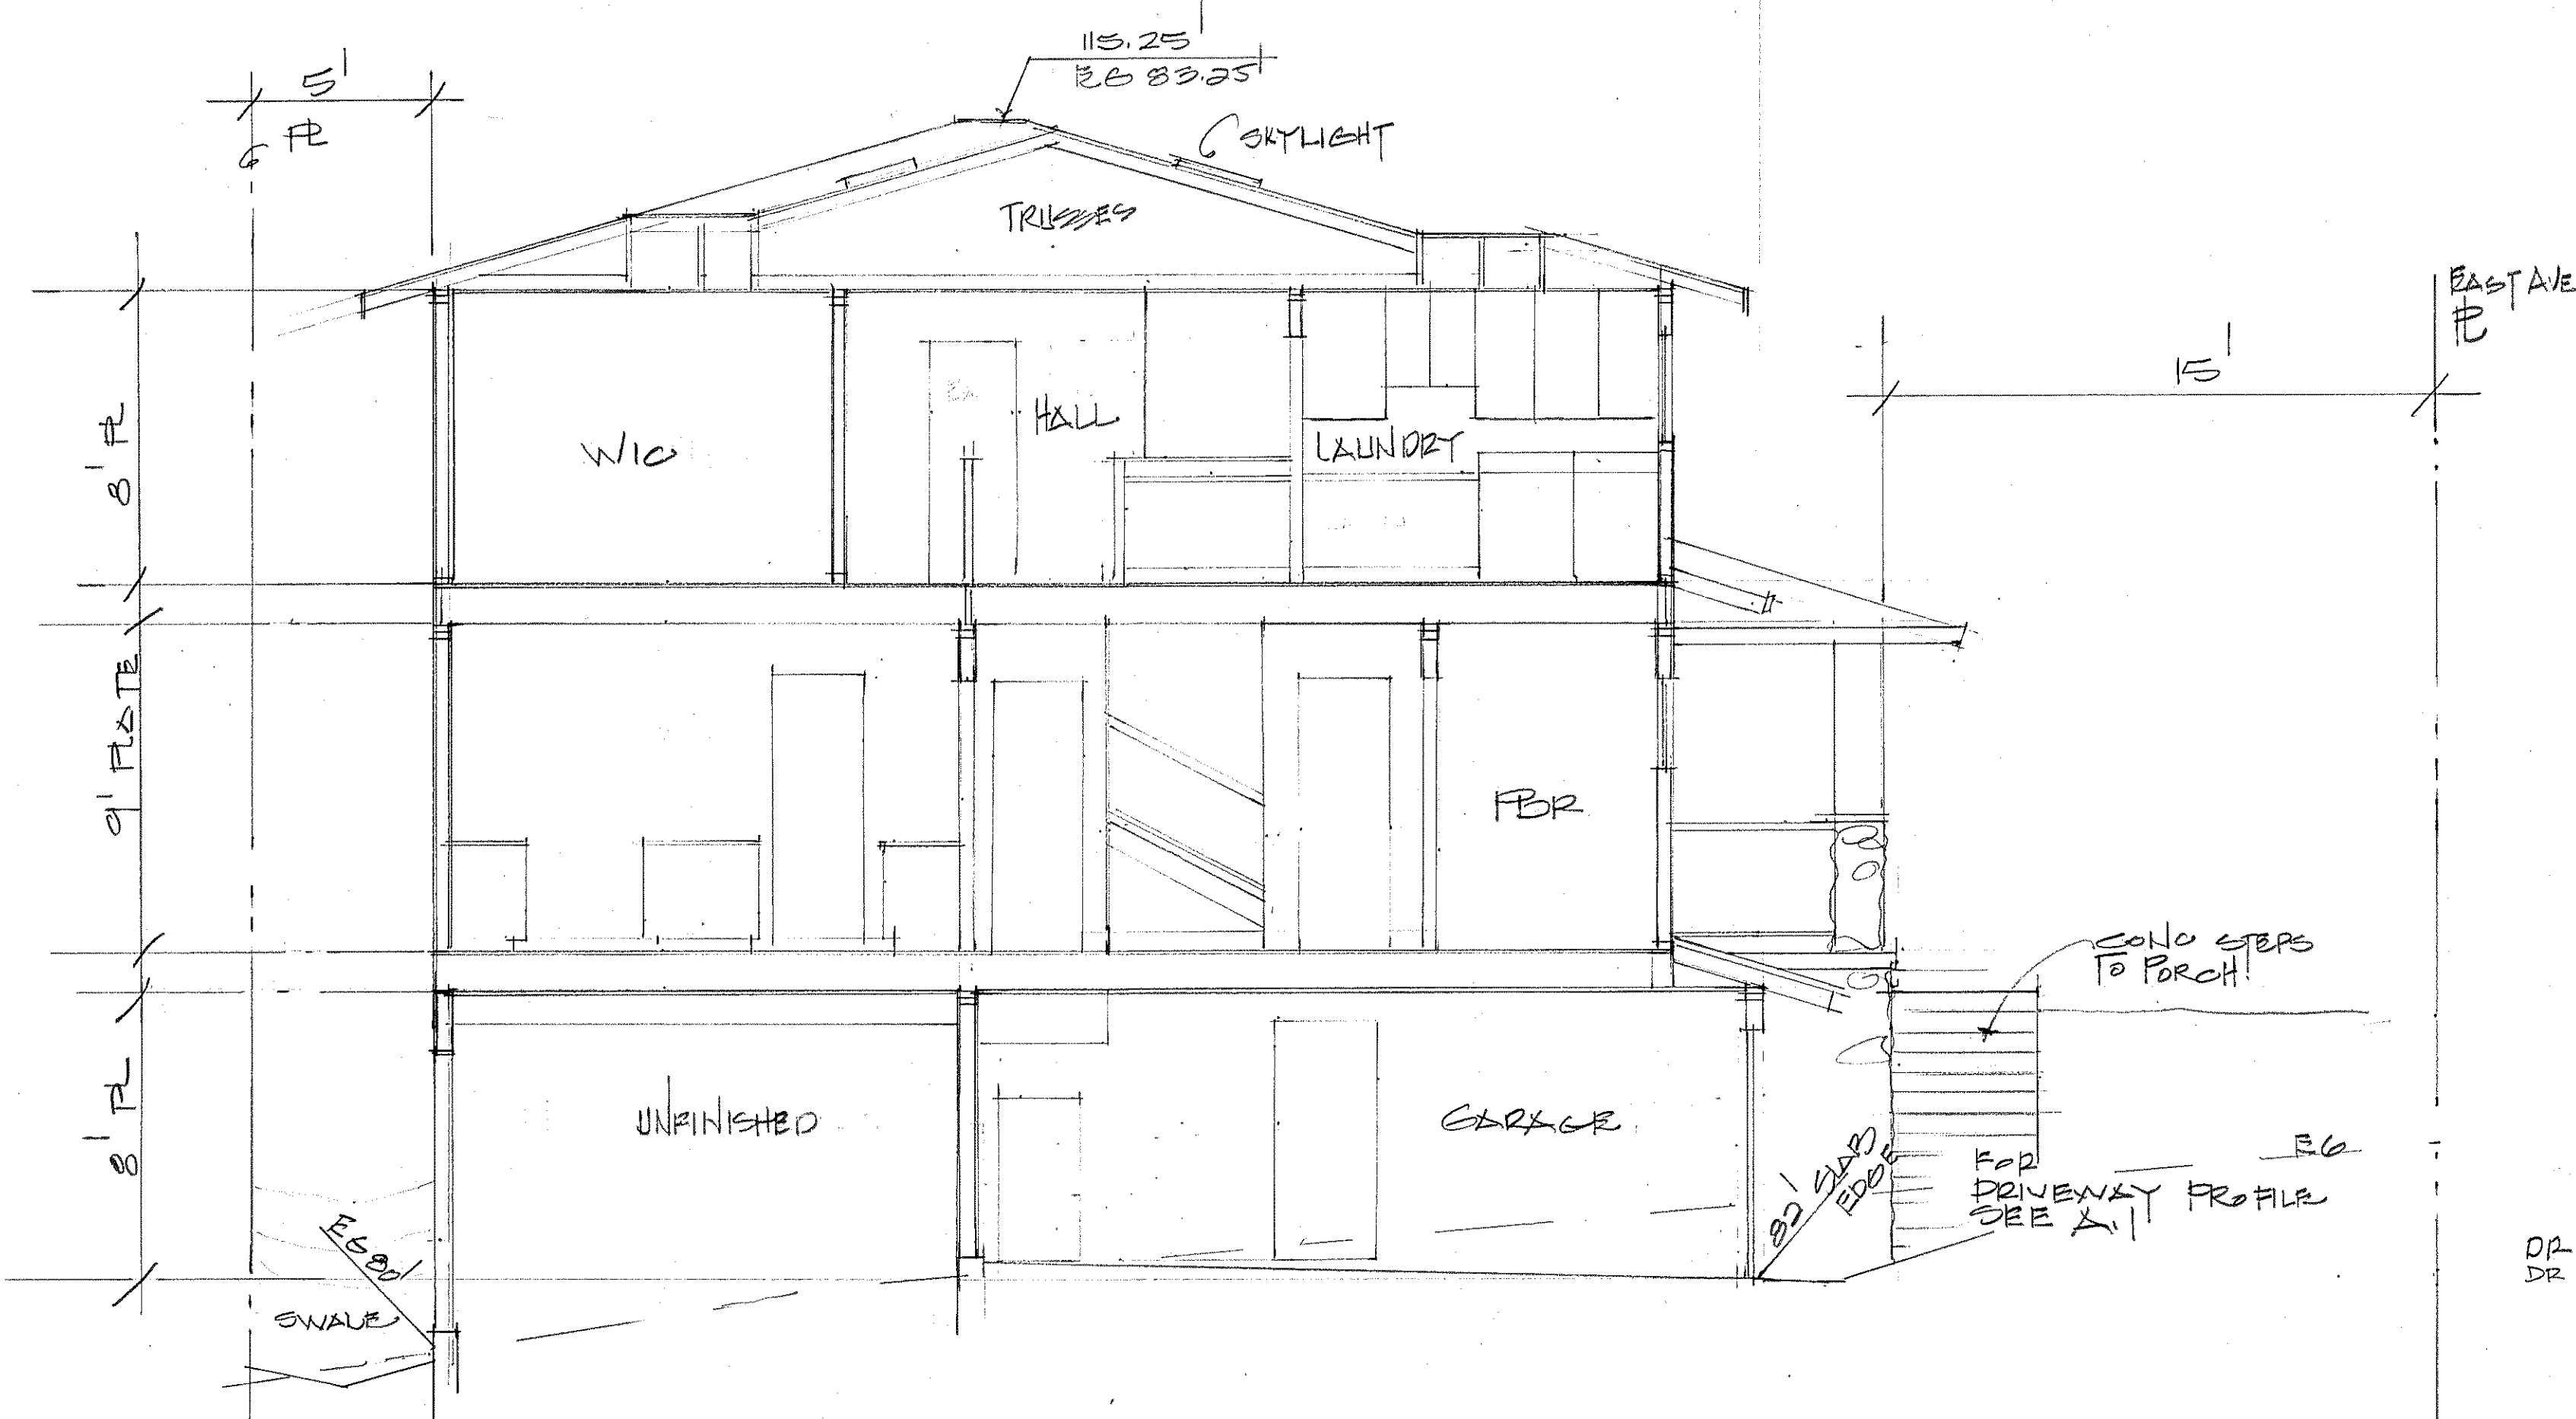

SECTION B SCALE 1/4" = 1'-0"


A NEW RESIDENCE FOR:
PAUL Mc GREGOR
 1900 EAST STREET
 MONTARA, CA. 94037 APN: 037-015-090

Plans Prepared By:
Anne Gustin Design, Inc.
 3414 Scenic Drive
 Napa, CA 94558
 Phone: (707)251-9500
 Fax: (707)251-9125
 anne_gustin@yahoo.com

PRINTED
 NOV 25 14
 DEC 22 14
 5-14-19

SHEET NO
 A. 4 OF 4

Notes: no equipment shall operate inside the tree protective fencing including during fence installation and removal.

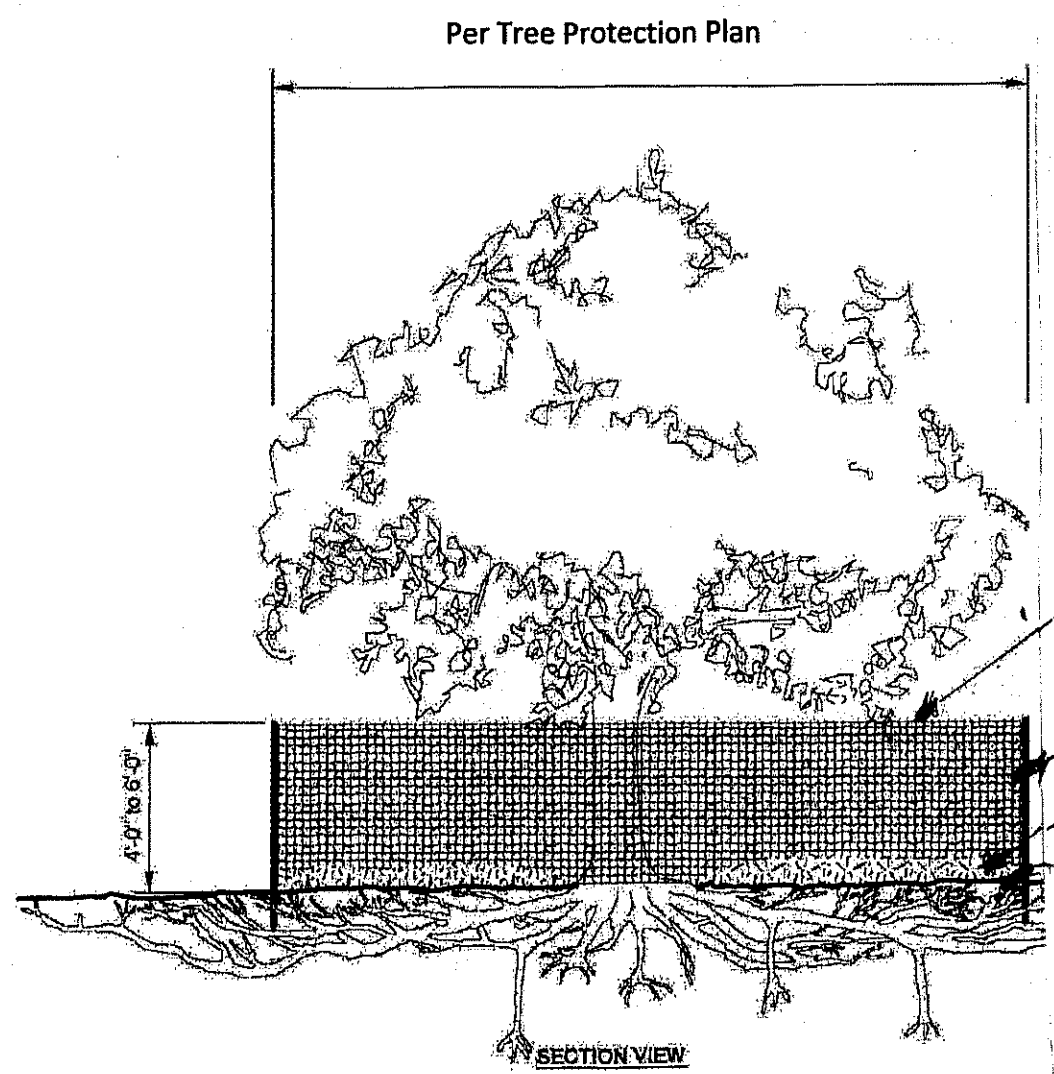


Tree Protection fence: High density polyethylene fencing with 3.5"x1.5" openings, Color Orange. Steel stacks installed at 8' O.C.
2"x6" steel posts or approved equal.
5" Layer mulch
Maintain existing grade with the fence.


Tree Protection Specifications:
THE FOLLOWING WORK, #1 THROUGH 23, MUST BE ACCOMPLISHED BEFORE ANY SITE CLEARING, GRADING OR OTHER EARTHWORK OCCURS.

1. THE GENERAL CONTRACTOR, HIS SUPERINTENDANT AND GRADING CONTRACTOR ARE REQUIRED TO MEET AT THE SITE PRIOR TO BEGINNING WORK TO REVIEW ALL WORK PROCEDURES, ACCESS ROUTES AND TREE PROTECTION MEASURES SHALL BE OUTLINED.
2. THE BOUNDARIES OF ALL TREE PROTECTION ZONES (TPZ'S) SHALL BE STAKED IN THE FIELD.
3. TREES TO BE REMOVED THAT HAVE BRANCHES EXTENDING INTO CANOPIES OF TREES TO REMAIN MUST BE REMOVED BY A QUALIFIED ARBORIST, NOT BY DEMOLITION OR CONSTRUCTION CONTRACTORS.
4. ANY NECESSARY BRUSH CLEARING WITHIN TPZ'S SHALL BE ACCOMPLISHED WITH HAND OPERATED EQUIPMENT.
5. TREE REMOVALS SHALL BE PERFORMED SO AS TO PREVENT DAMAGE TO BRANCHES, TRUNKS AND ROOTS OF PROTECTED TREES.
6. TREES TO BE REMOVED FROM WITHIN A TPZ SHALL BE REMOVED BY A QUALIFIED ARBORIST. STUMPS SHALL BE CUT LOW AS POSSIBLE. IF STUMP GRINDING IS PREFERRED BY THE OWNER OR CONTRACTOR, GRINDING SHALL NOT BE DEEP ENOUGH TO DAMAGE WOODY ROOTS OF ADJACENT PROTECTED TREES.
7. ALL DOWNED BRUSH AND TREES SHALL BE REMOVED FROM TPZ'S EITHER BY HAND OR WITH EQUIPMENT SITTING OUTSIDE THE TPZ, BY LIFTING THE MATERIAL OUT, NOT BY SKIDDING ACROSS THE GROUND.
8. CHIPPED BRUSH AND WOOD FROM REMOVED TREES OR PRUNING MAY BE PLACED IN TPZ'S UP TO 6 INCHES DEEP AND NOT PILED AGAINST TREE TRUNKS.
9. ROOTS OR OTHER UNDERGROUND FEATURES TO BE REMOVED WHERE A TPZ WOULD BE DISTURBED, SHALL BE DONE SO AS TO MINIMIZE DISTURBANCE. EQUIPMENT SHALL OPERATE FROM OUTSIDE THE TPZ.
10. ANY PRUNING REQUIRED FOR SITE PREPARATION SHALL BE PERFORMED BY A QUALIFIED ARBORIST AND IN ACCORDANCE WITH CURRENT PROFESSIONAL STANDARDS.
11. A 4 FOOT 'HVIS' OR COMPARABLE BARRIER FENCE, AFFIXED WITH LOCKING ZIP-TIES TO STEEL T POSTS SHALL BE ERRECTED TO FULLY ENCLOSE TPZ'S, OR PARTIALLY ENCLOSE THEM AS INDICATED ON THE TREE PROTECTION PLAN AND PROTECTION SPECIFICATIONS.
12. ANY TREE DAMAGE RESULTING FROM GRADING OR OTHER SITE PREPARATION WORK SHALL BE REPORTED TO THE PROJECT CONSULTING ARBORIST WITHIN 6 HOURS SO THAT REMEDIAL ACTION CAN BE TAKEN. TIMELINESS IS CRITICAL.
13. IF TEMPORARY ACCESS PATHWAYS FOR VEHICLES MUST PASS OVER TPZ'S, A BED OF 6 INCHES OF COURSE WOOD CHIP MULCH SHALL BE INSTALLED TO PROTECT THE SOIL AND ROOTS.
14. THE CONTRACTOR SHALL INFORM ALL SUB-CONTRACTORS OF THE REQUIREMENTS OF THE TREE PROTECTION PLAN.
15. CONSTRUCTION TRAILERS, TRAFFIC, PARKING AND STORAGE AREAS MUST REMAIN OUTSIDE OF FENCED AREAS AT ALL TIMES.
16. ALL UNDERGROUND UTILITIES, AND DRAINAGE OR IRRIGATION LINES SHALL BE ROUTED OUTSIDE THE TPZ'S. IF LINES MUST TRAVERSE A TPZ THEY SHALL BE HAND DUG, TUNNELED OR BORED UNDER TREES.
17. NO MATERIALS, EQUIPMENT, SPOIL OR WASTE OR WASHOUT WATER MAY BE DEPOSITED, STORED, OR PARKED WITHIN A TPZ.
18. ADDITIONAL TREE PRUNING REQUIRED FOR CLEARANCE DURING CONSTRUCTION MUST BE PERFORMED BY A QUALIFIED ARBORIST AND NOT BY CONSTRUCTION PERSONNEL.
19. IF INJURY SHOULD OCCUR TO ANY TREE DURING CONSTRUCTION, IT SHOULD BE EVALUATED AS SOON AS POSSIBLE BY THE PROJECT CONSULTING ARBORIST SO THAT APPROPRIATE TREATMENTS CAN BE APPLIED IN A TIMELY FASHION.
20. BEFORE GRADING, PAD PREPARATION, OR EXCAVATION FOR FOUNDATIONS, FOOTINGS, WALLS, OR TRENCHING, ANY TREE WITHIN A TPZ SHALL BE EVALUATED BY THE PROJECT CONSULTING ARBORIST AND CONTRACTOR IN ORDER TO ESTABLISH A PLAN THAT WILL PREVENT OR MINIMIZE TREE DAMAGE. SUCH PLANS MAY INCLUDE MANUAL OR PNEUMATIC EXCAVATIONS TO EXPOSE AND EVALUATE ROOTS. ALTERNATIVE CONSTRUCTION TECHNIQUES, ROOT PRUNING SUPERVISED BY THE PROJECT ARBORIST.
21. ANY GRADING, TRENCHING, CONSTRUCTION, DEMOLITION OR OTHER WORK THAT IS EXPECTED TO ENCOUNTER TREE ROOTS IN THE TPZ MUST BE MONITORED BY THE CONTRACTOR OR HIS SUPERINTENDANT WHILE THE WORK IS PERFORMED. TAGGED TREE NUMBERS SHOULD BE SPECIFIED.
22. ANY WOODY ROOTS DAMAGED DURING GRADING AND CONSTRUCTION SHALL BE EXPOSED BACK TO SOUND TISSUE BY THE CONTRACTOR AND EVALUATED BY THE PROJECT CONSULTING ARBORIST FOR FURTHER ACTION, WHICH MIGHT INCLUDE CLEANLY SEVERING DAMAGED ROOTS BACK TO TIGHT CAMBium OR EXCISING DAMAGED BARK.
23. SPOIL FROM TRENCHES OR OTHER EXCAVATIONS SHALL NOT BE PLACED WITHIN TPZ'S.

Tree Protection Detail

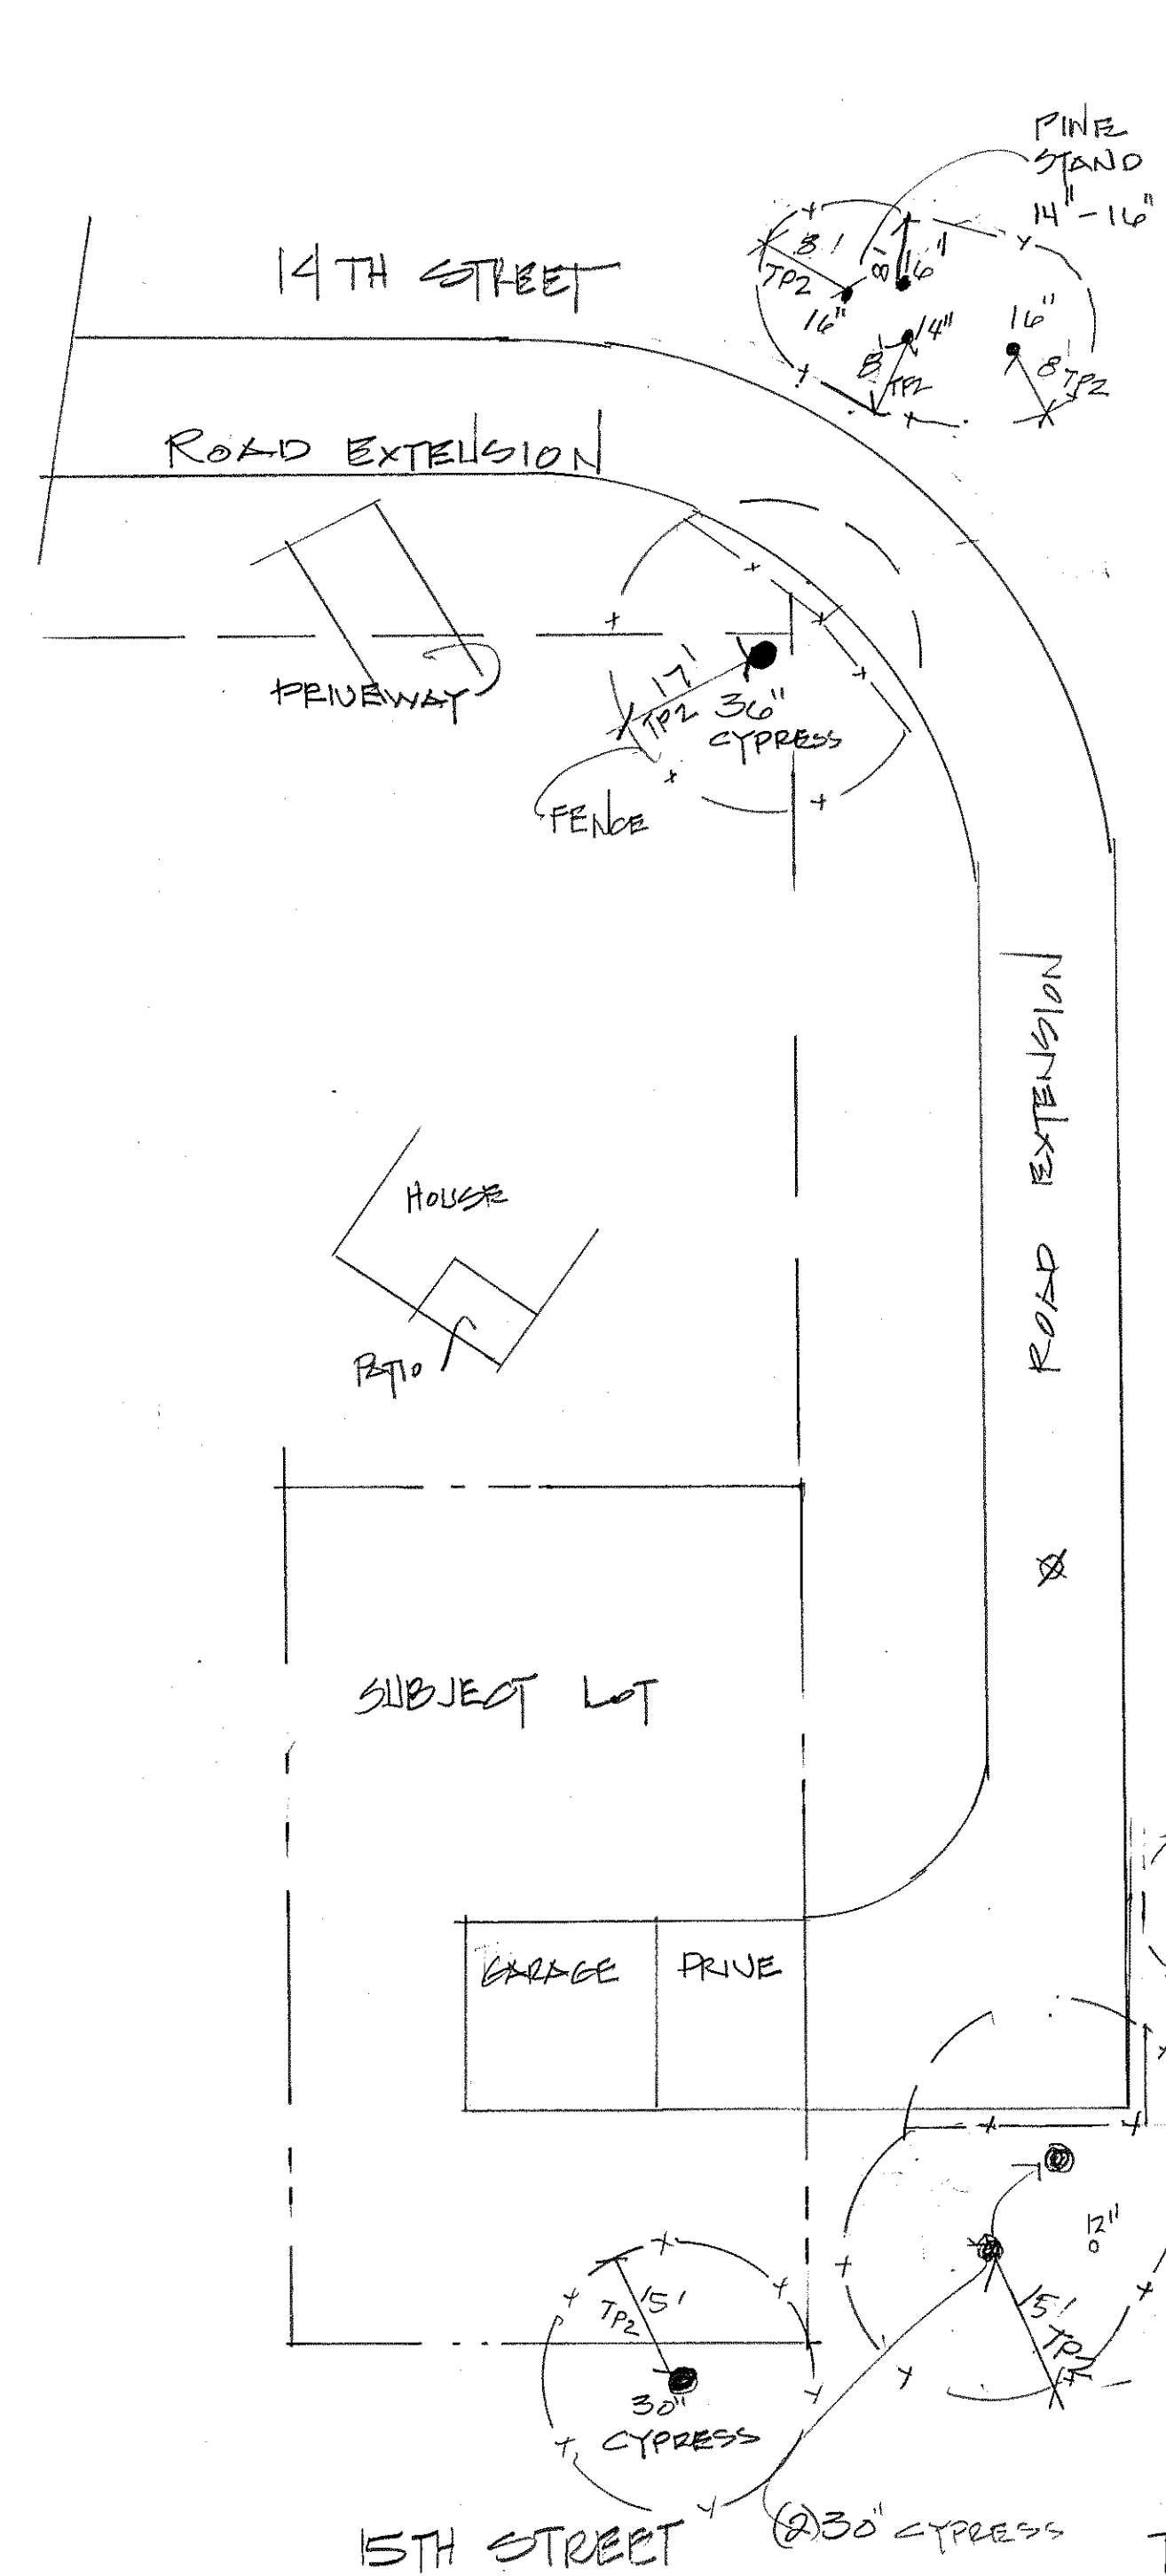

14TH STREET
ROAD EXTENSION
PRIVILEGE
HOUSE
GARAGE DRIVE
SUBJECT LOT
EAST AVE
15TH STREET
TREE PROTECTION PLAN 1"=20'

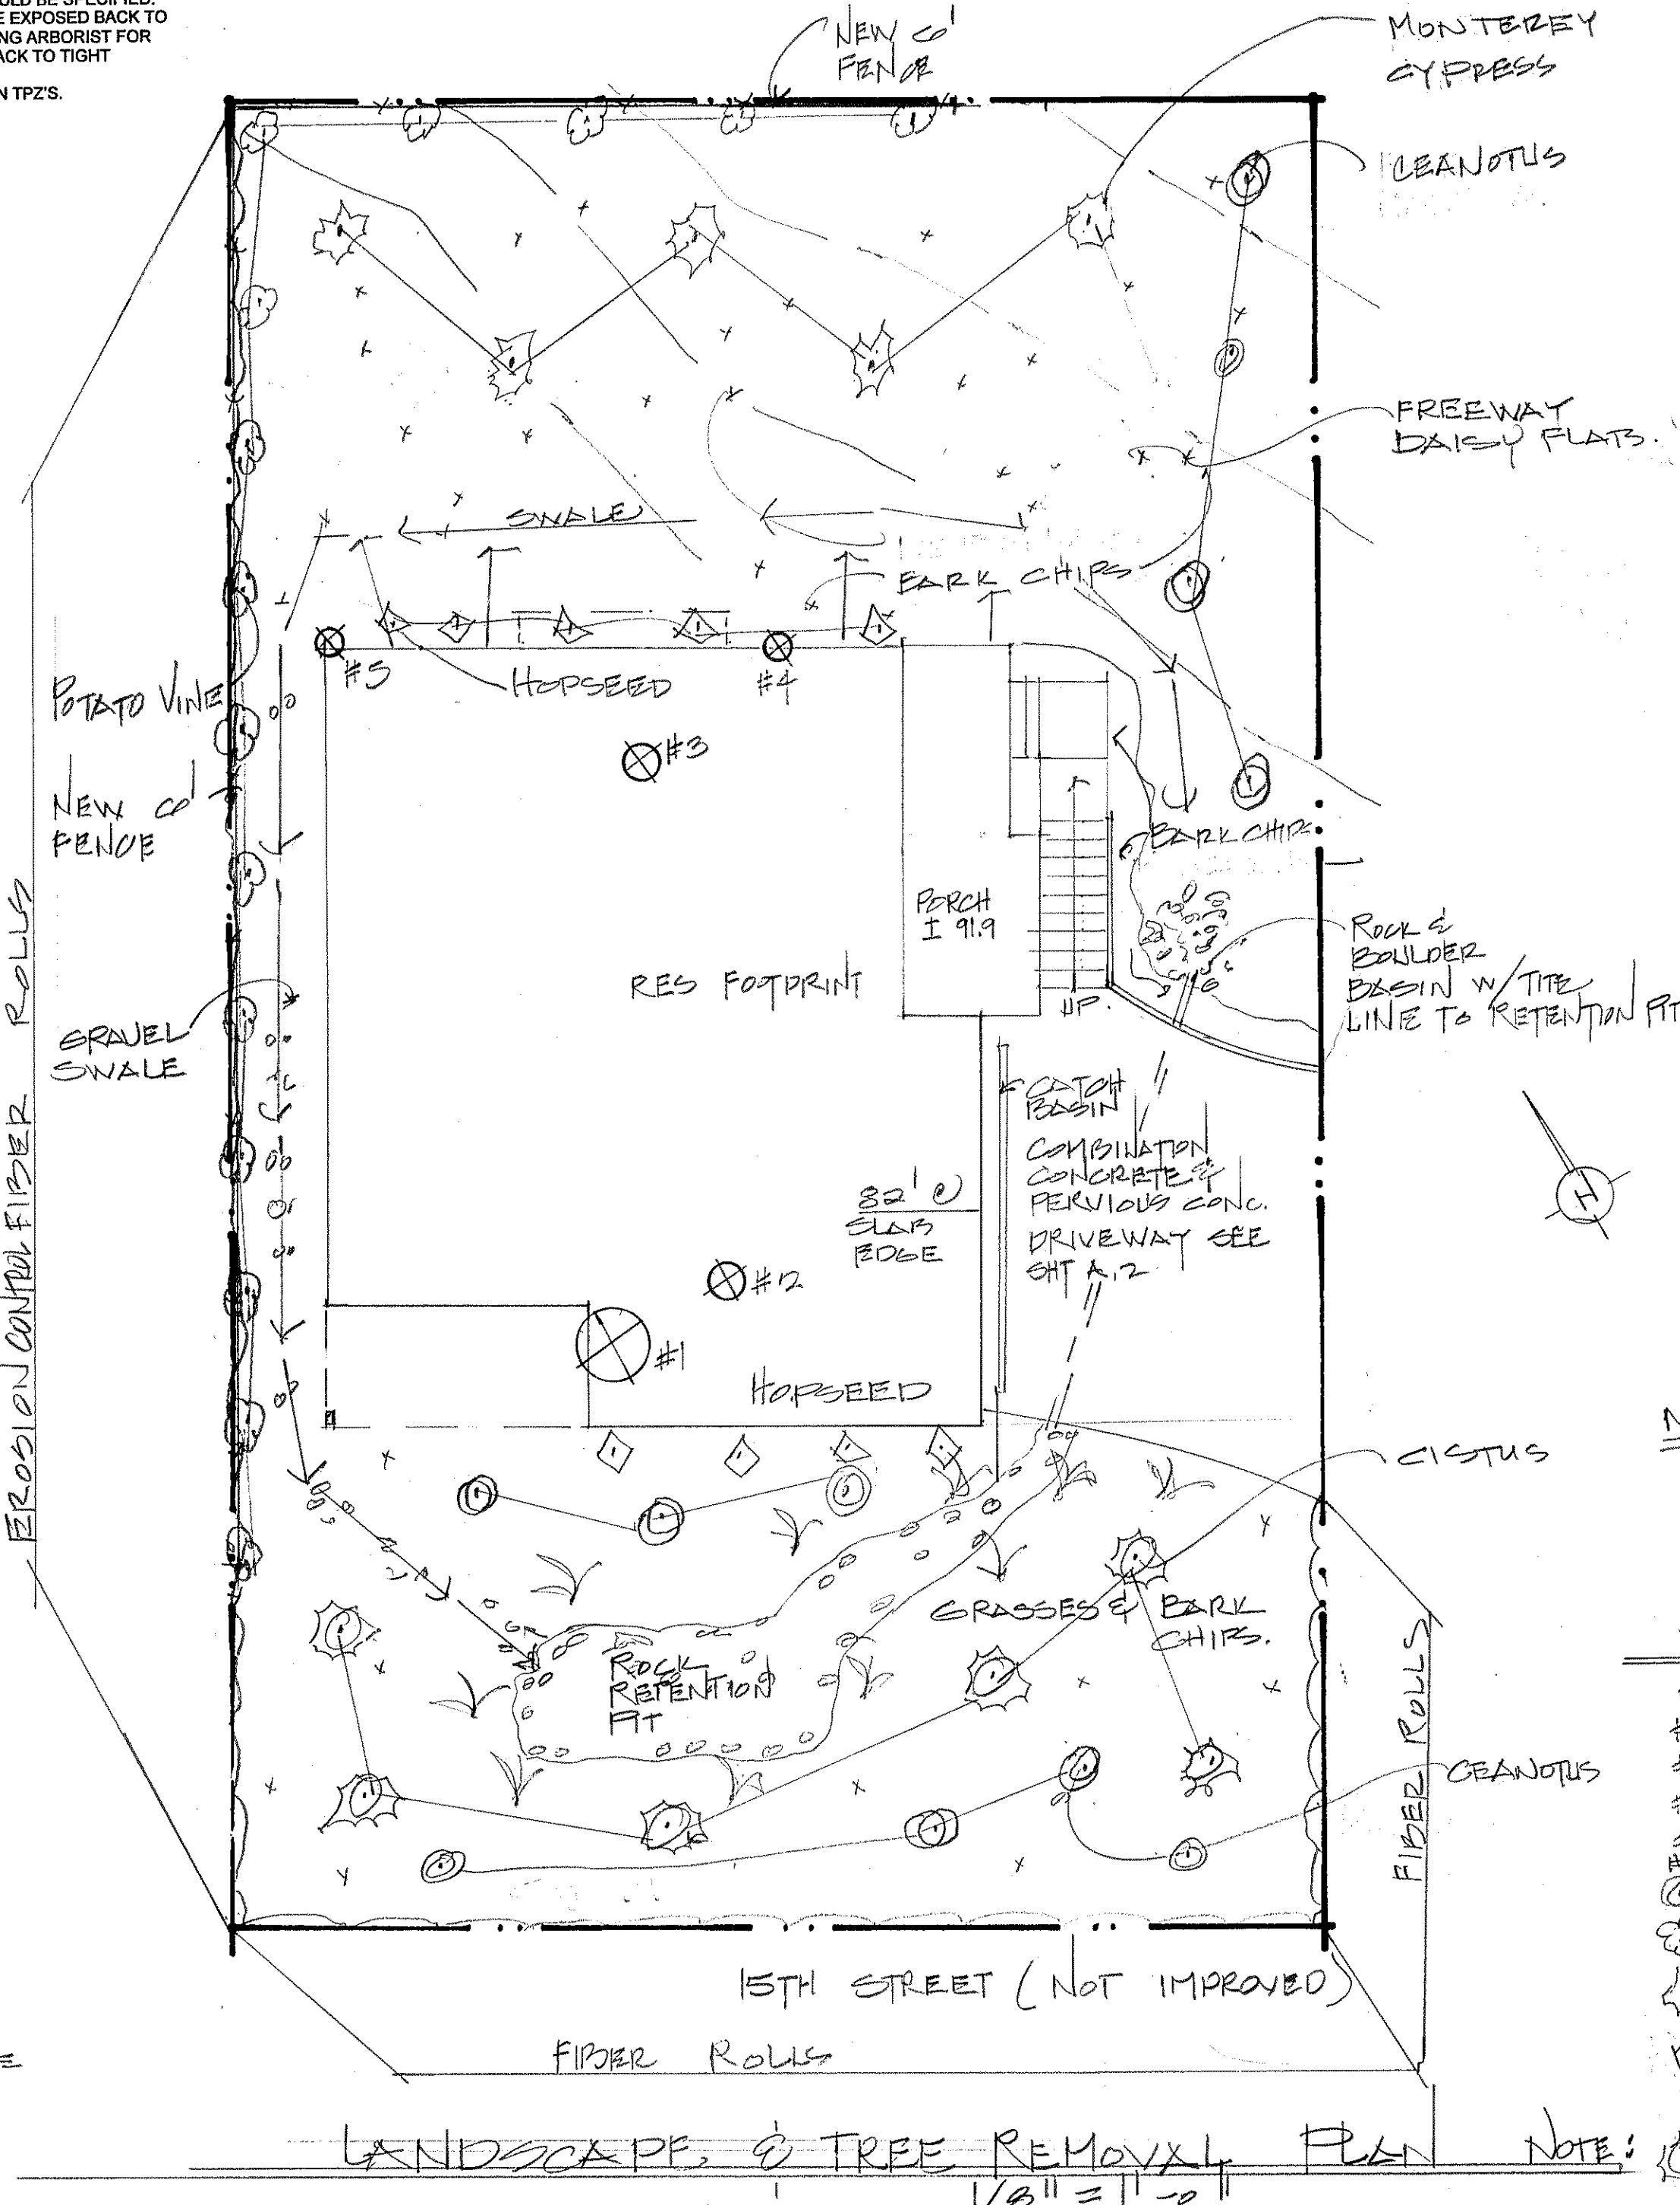

NOTE: DO NOT USE MEXICAN FEATHER OR CRIMSON FOUNTAIN GRASSES

- TREES REMOVED:**
- #1 18" c CYPRESS
 - #2 24" c CYPRESS
 - #3 24" c CYPRESS
 - #4 10" c CYPRESS
 - #5 18" c CYPRESS
 - #6 30" c PINE
 - ② CEANOTHUS 8-02 GAL
 - ☼ POTATOE VINE-150 GAL
 - ☼ NEW TREES-MONTEREY CYPRESS 500 GAL
 - ☼ HOPESEED- 90 GAL
 - ☼ FREEWAY DAISY FLATS
 - ☼ CISTUS- 60-1 GAL


- EROSION CONTROL**
- ☐ Schedule grading and excavation work for dry weather only.
 - ☐ Stabilize all denuded areas, install and maintain temporary erosion controls (such as erosion control fabric or bonded fiber matrix) until vegetation is established.
 - ☐ Seed or plant vegetation for erosion control on slopes or where construction is not immediately planned.
- Sediment Control**
- ☐ Protect storm drain inlets, gutters, ditches, and drainage courses with appropriate BMPs, such as gravel bags, fiber rolls, berms, etc.
 - ☐ Prevent sediment from migrating offsite by installing and maintaining sediment controls, such as fiber rolls, silt fences, or sediment basins.
 - ☐ Keep excavated soil on the site where it will not collect into the street.
 - ☐ Transfer excavated materials to dump trucks on the site, not in the street.

A NEW RESIDENCE FOR:
PAUL Mc GREGOR
1900 EAST STREET
MONTARA, CA. 94037 APN: 037-015-090

LANDSCAPE PLAN, TREE PROTECTION PLAN

Plans Prepared By:
Anne Gustin Design, Inc.
3414 Scenic Drive
Napa, CA 94558
Phone: (707)251-9500
Fax: (707)251-9125
anne.gustin@yahoo.com

PRINTED
DEC. 22, 14
1-19-15
8-19-16
9-14-17
DR
REV
OR
SHEET #
L.1

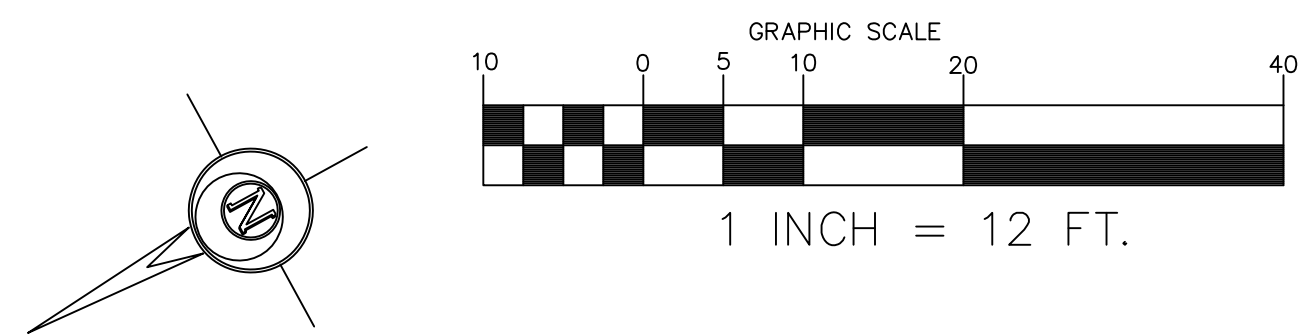

LEGEND

- EXISTING CONTOURS
- PROPOSED CONTOURS
- DIRECTION OF SURFACE DRAINAGE FLOW
- E** EXISTING
- N** NEW, OR PROPOSED
- FF** FINISH FLOOR

GENERAL NOTES


1. PLANS PREPARED AT THE REQUEST OF: PAUL MCGREGOR
2. SURVEY BY PAT McNULTY, SEP 2014.
3. ELEVATIONS BASED ON ASSUMED DATUM.
4. THIS IS NOT A BOUNDARY SURVEY.

EARTHWORK NOTES









CUT VOLUME: 150 CY
 FILL VOLUME: 0 CY
 NET VOLUME, ROAD: 150 CY CUT/FILL
 NET VOLUMES, ROAD AND HOUSE: 200 CY
 LENGTH OF PROPOSED PAVED DRIVE = 290.5 FT
 AREA OF PAVED SURFACE IN R.O.W. = 5231 SF
 VOLUME OF AGGREGATE ROAD BASE (AB) = 97 CY

DRAINAGE NOTES

DRAINAGE DIRECTIONS AS SHOWN BY DRAINAGE ARROWS ON PLAN: POSITIVE DRAINAGE, OR OUT-SLOPING OF THE ROAD, WITH CROWN ALONG CENTERLINE, SHALL BE MAINTAINED THROUGHOUT.
 SHOULDERS OF ROAD SHALL INCLUDE SWALES, WHERE SHOWN.

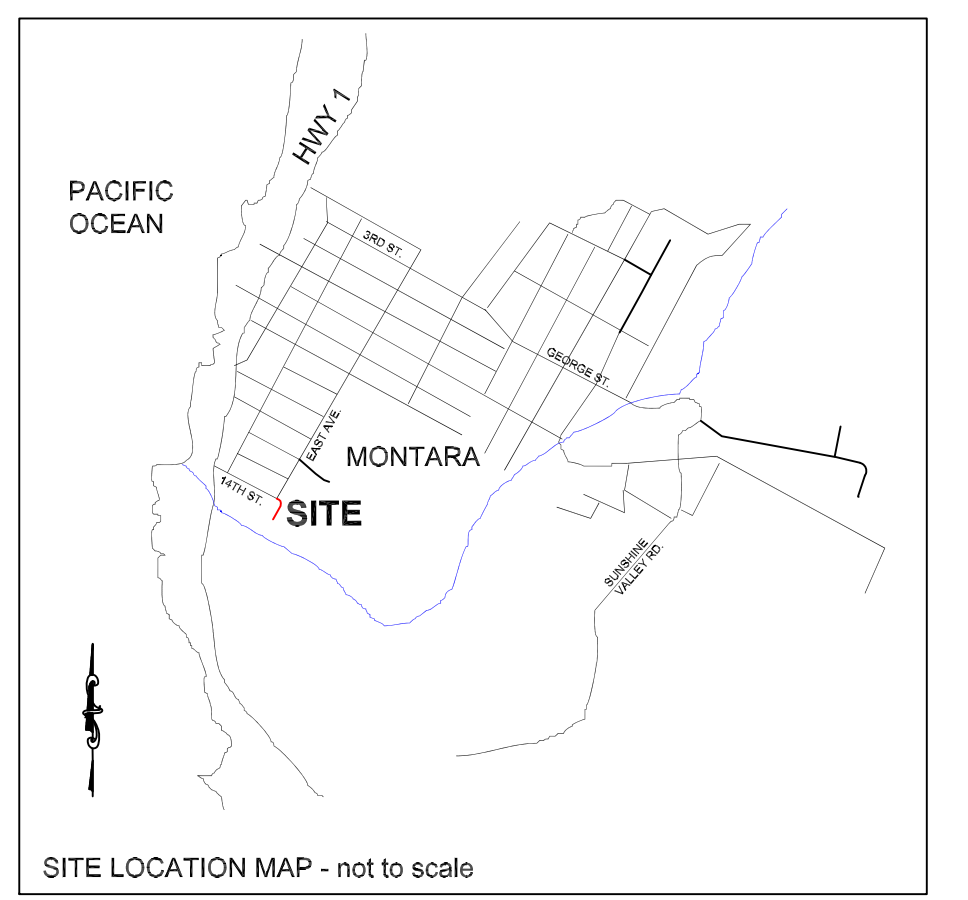


SECTION AND DETAIL CONVENTION

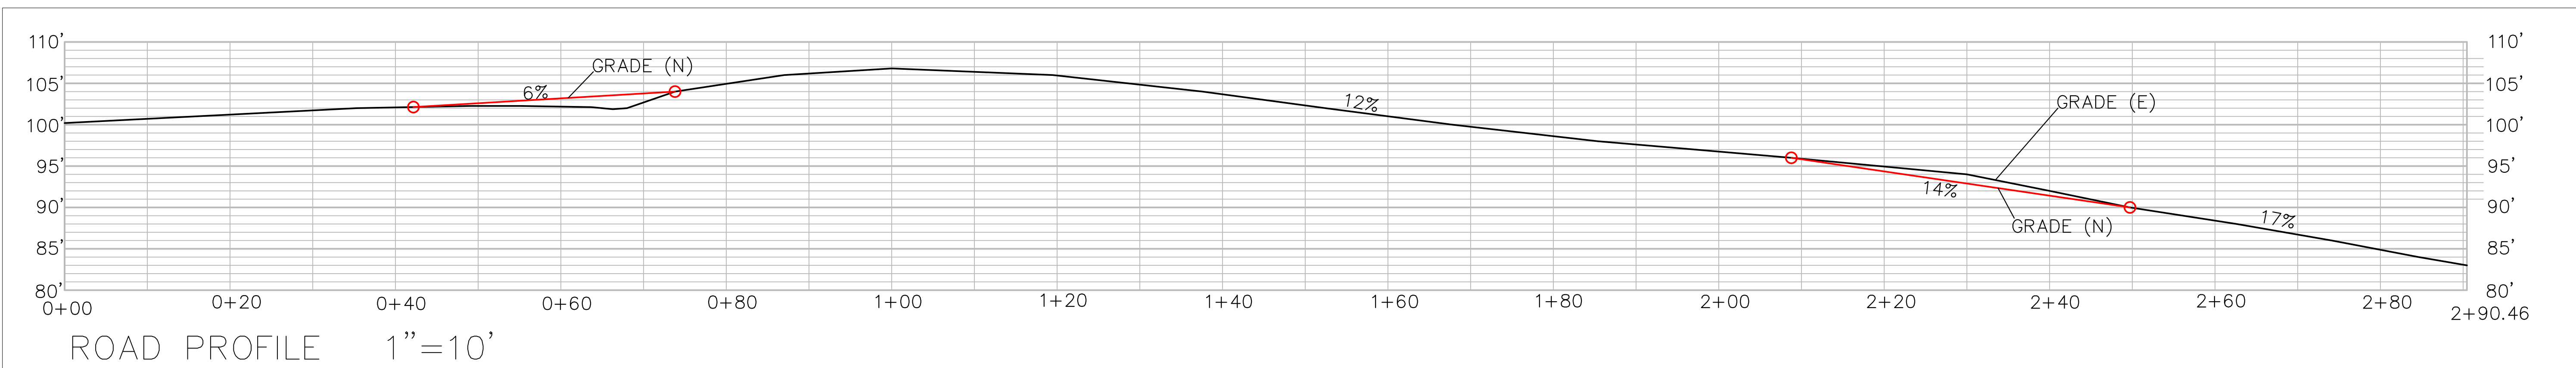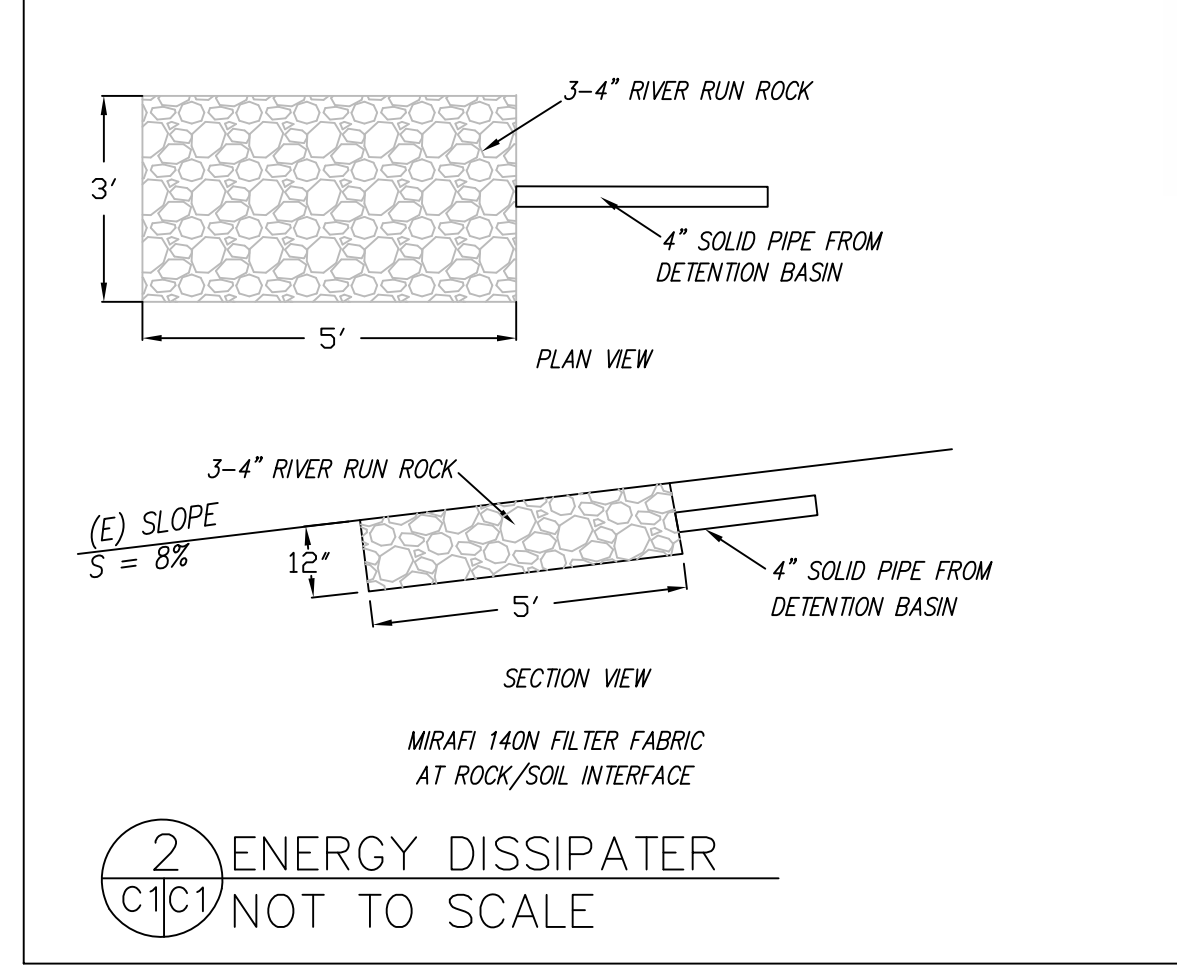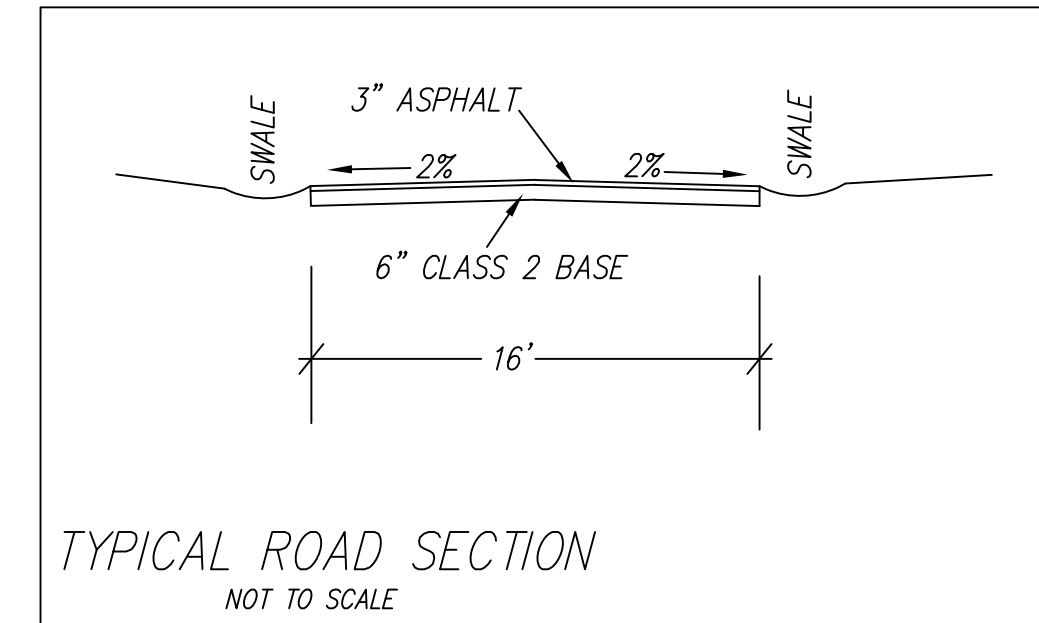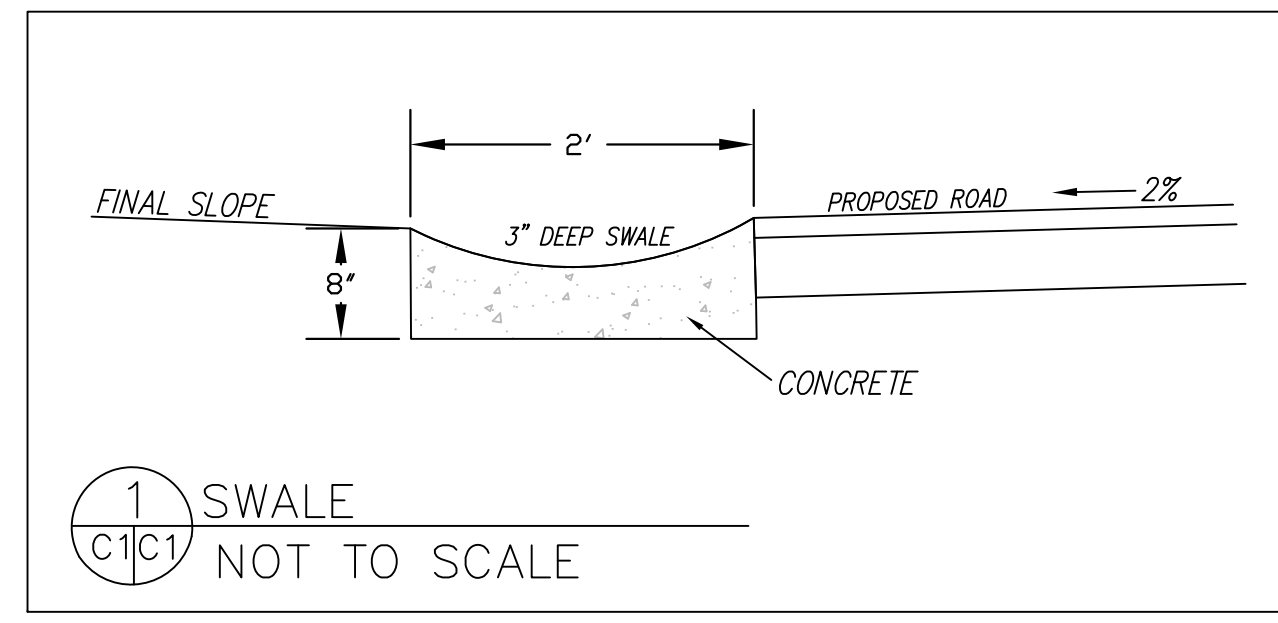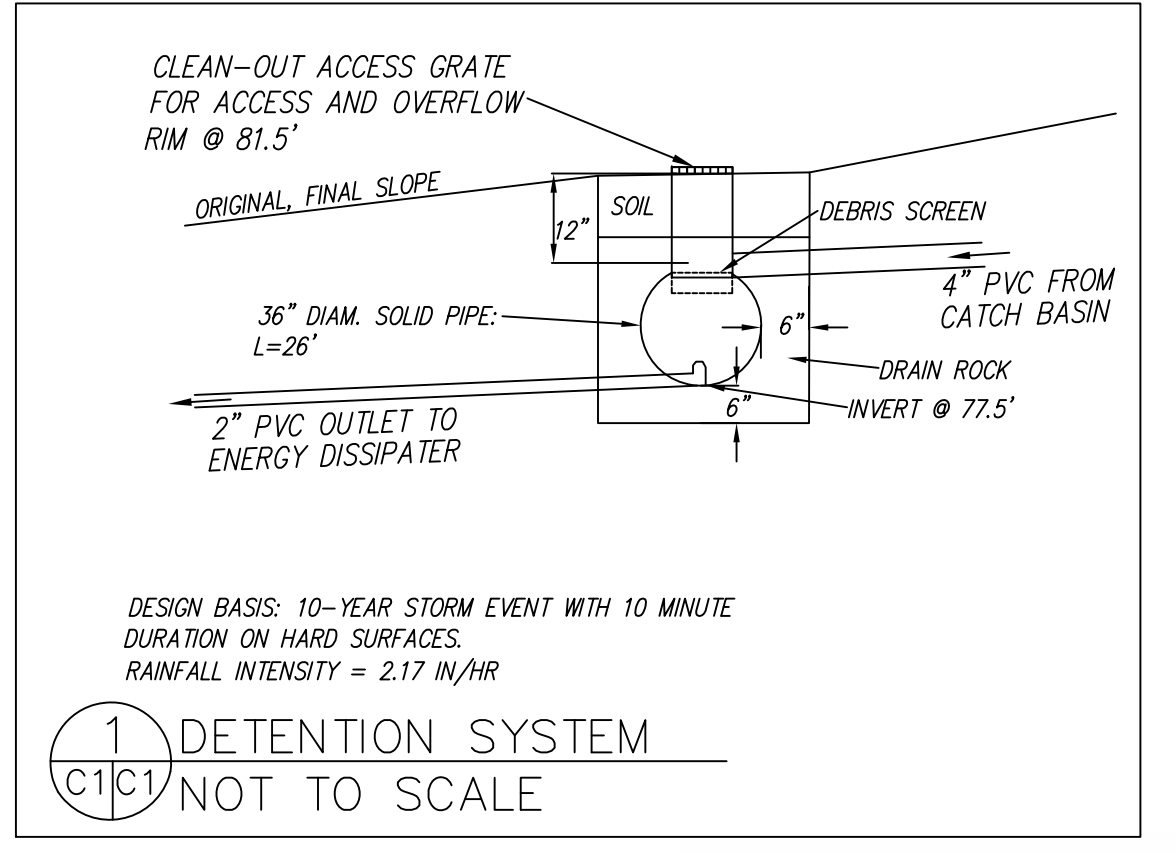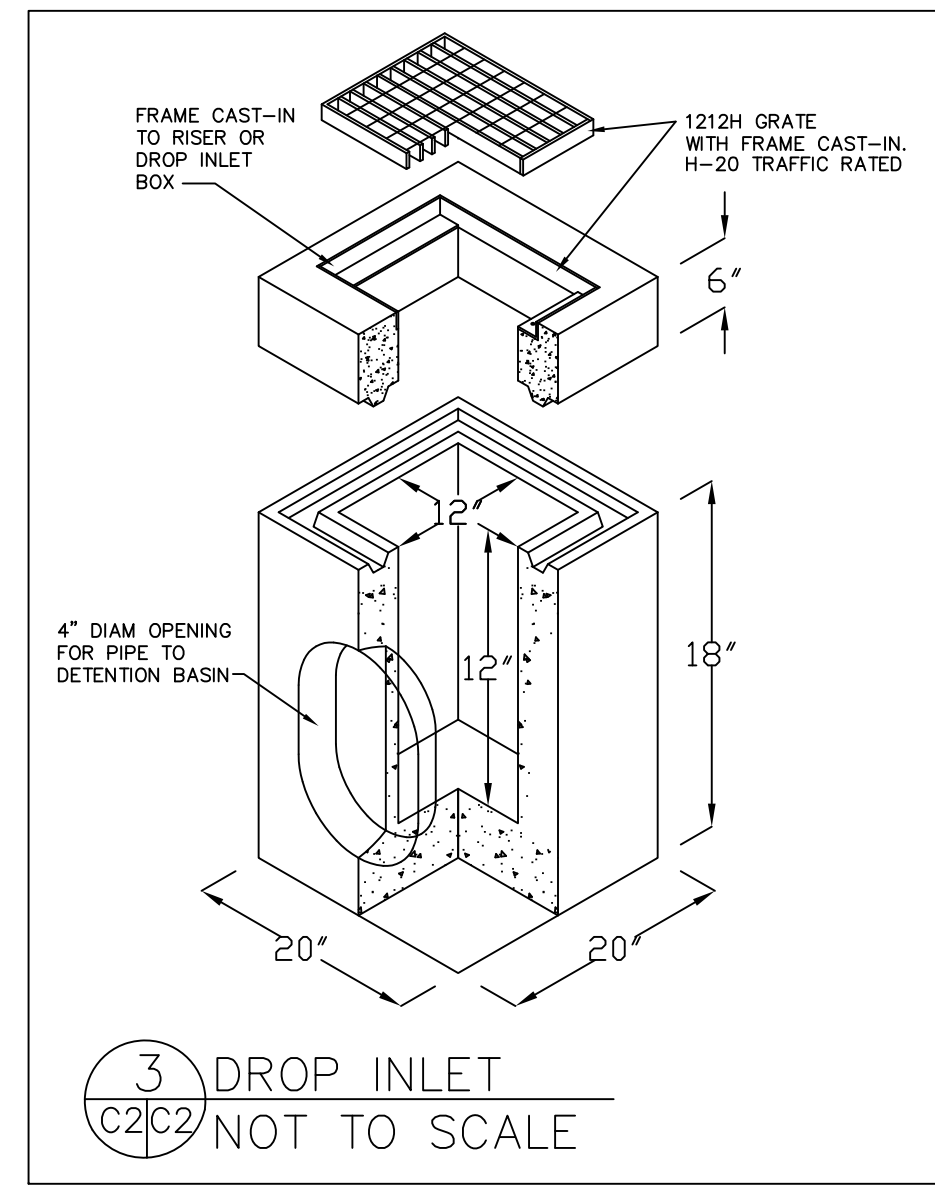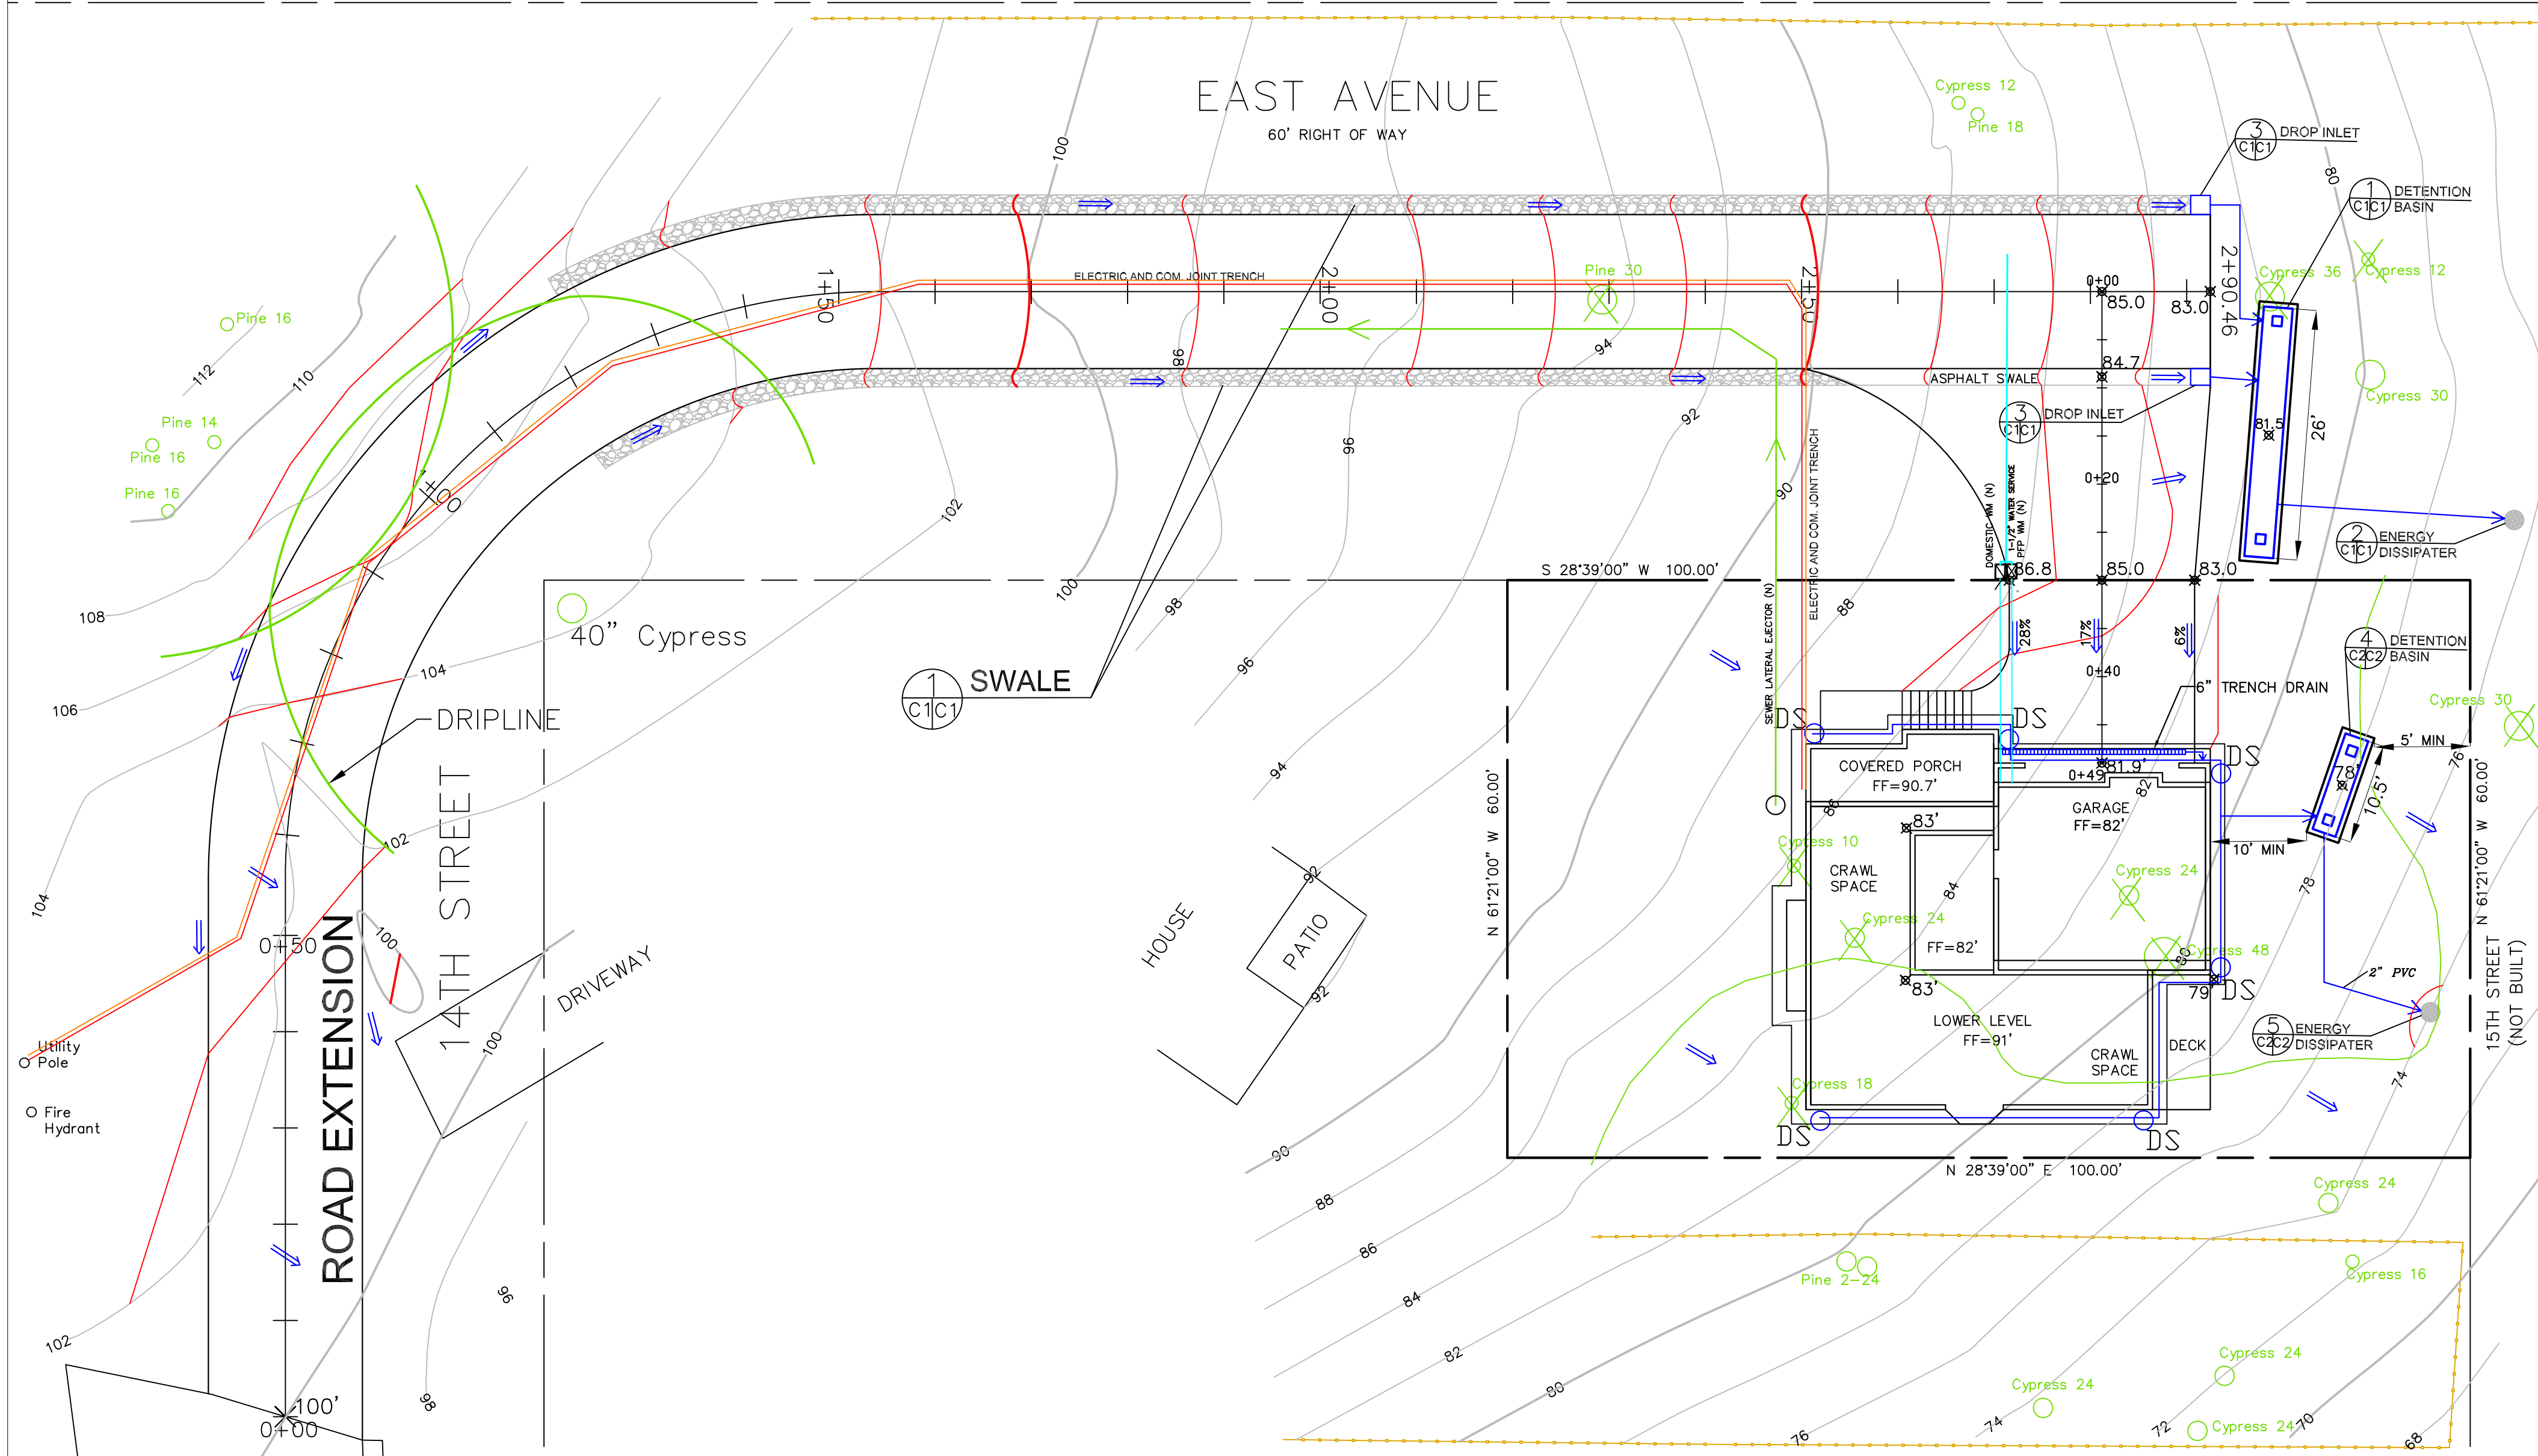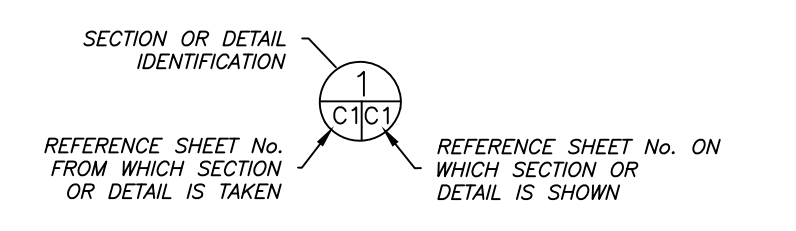

Sigma Prime Geosciences, Inc.
 SIGMA PRIME GEOSCIENCES, INC.
 332 PRINCETON AVENUE
 HALF MOON BAY, CA 94019
 (650) 728-3590
 FAX: 728-3593

DATE: 8-24-17	DRAWN BY: CMK	CHECKED BY: AZG	REV. DATE:	REV. DATE:
---------------	---------------	-----------------	------------	------------

GRADING AND DRAINAGE PLAN - ROAD
 1900 EAST AVE.
 MONTARA, CALIFORNIA
 APN: 037-015-019




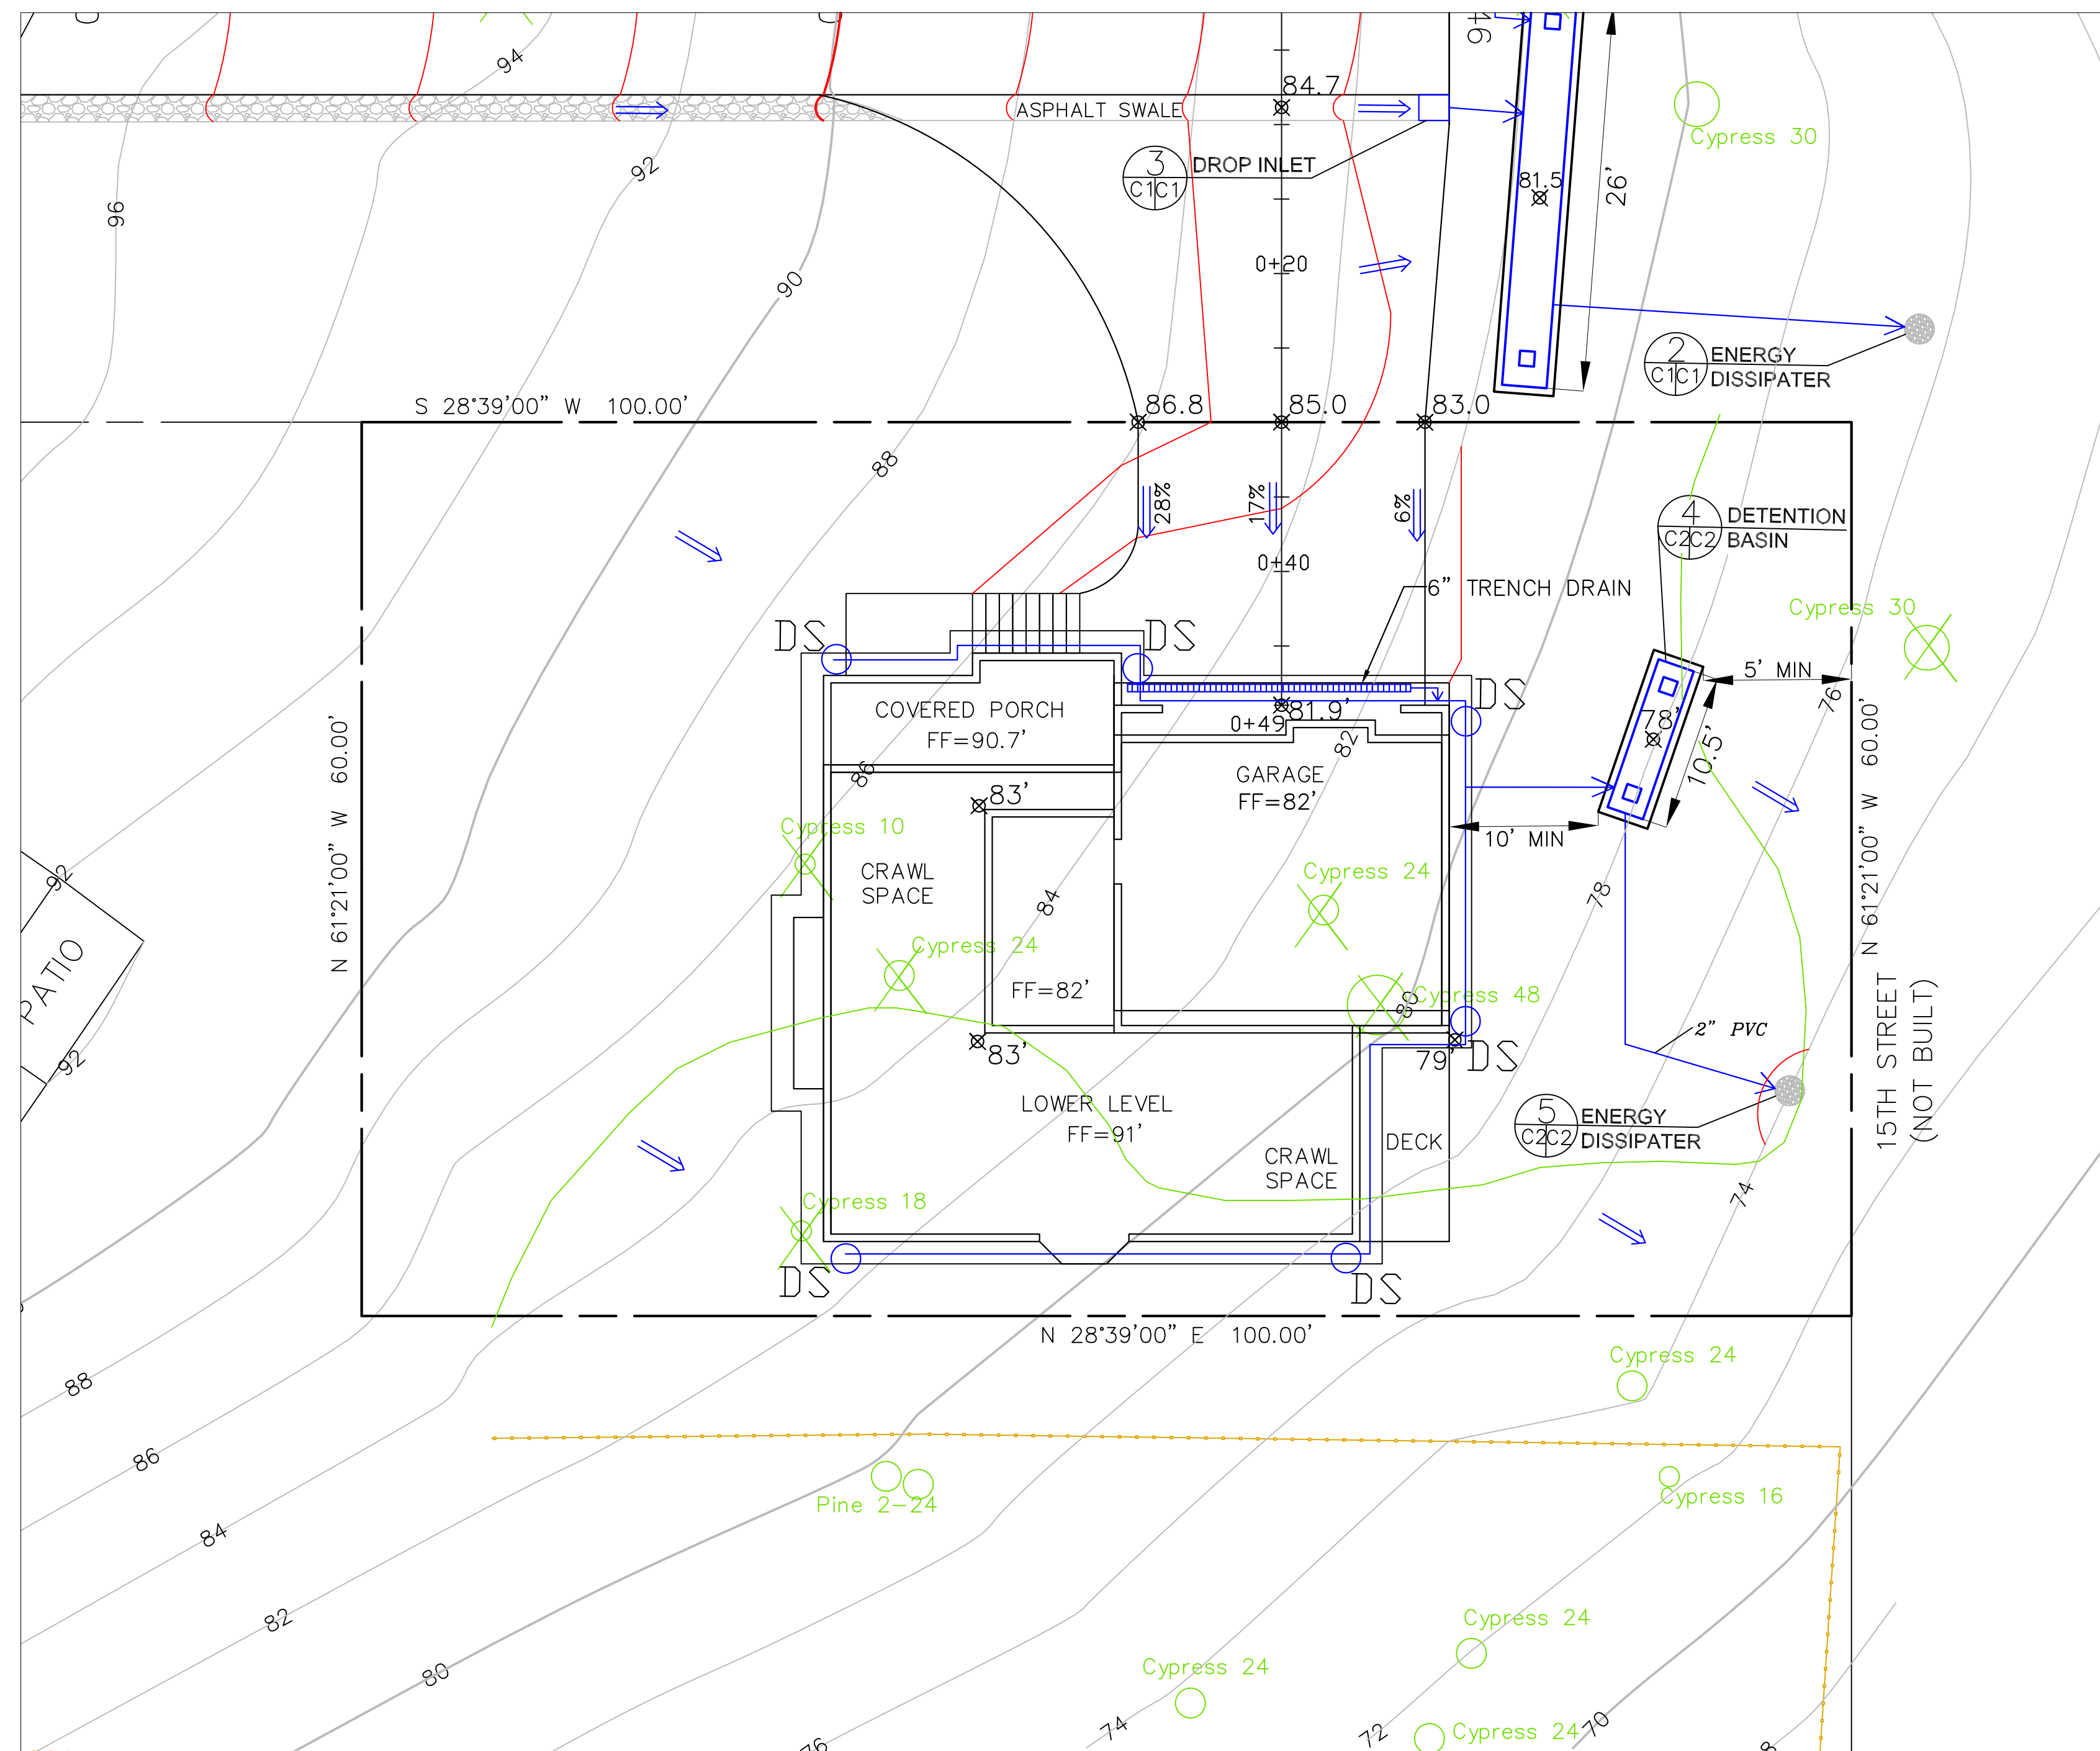


- LEGEND**
- EXISTING CONTOURS
 - PROPOSED CONTOURS
 - PROPOSED SPOT ELEVATION
 - ENERGY DISSIPATER - PER DETAIL 3
 - DRAIN DOWNSPUT
 - 4" MIN SOLID DRAIN PIPE UNLESS OTHERWISE NOTED

- GENERAL NOTES**
1. PLANS PREPARED AT THE REQUEST OF: PAUL MCGREGOR, OWNER
 2. TOPOGRAPHY BY PAT McNULTY, L.S., SURVEYED SEPTEMBER, 2014.
 3. THIS IS NOT A BOUNDARY SURVEY.
 4. ELEVATION DATUM ASSUMED.
 5. THE GEOTECHNICAL REPORT: **GEOTECHNICAL INVESTIGATION: 1900 EAST STREET MONTARA, CALIFORNIA, APN 037-015-019**; DATE: TBD, BY SIGMA PRIME GEOSCIENCES, INC., PROJECT NO. 15-106 SHALL BE RETAINED ON THE CONSTRUCTION SITE. THE GEOTECHNICAL ENGINEER OF RECORD IS SIGMA PRIME GEOSCIENCES, WITH THE CONTACT NUMBER (650)-728-3590. THE CONTRACTOR MUST SHALL NOTIFY THE GEOTECHNICAL ENGINEER OF RECORD AT LEAST 48 HOURS BEFORE CONSTRUCTION OF GEOTECHNICAL RELATED WORK. THE GEOTECHNICAL PART OF CONSTRUCTION WORK, INCLUDING BUT NOT LIMITED TO, ALL THE EARTHWORK AND FOUNDATION CONSTRUCTIONS, MUST SHALL BE APPROVED BY THE GEOTECHNICAL ENGINEER OF RECORD.
 6. STORMWATER MANAGEMENT CONSTRUCTION INSPECTIONS SHALL BE SCHEDULED FOR APPLICABLE DRAINAGE INSPECTIONS, WHICH INCLUDE SITE CLEARANCE AND EROSION CONTROL MEASURES INSTALLATION AS WELL AS INSPECTION OF MAJOR DRAINAGE CONTAINMENT, TREATMENT, AND CONVEYANCE DEVICES BEFORE BEING BURIED (INCLUDING REQUIRED MATERIAL LABELS, E.G. PIPES, SUG-BGRADE MATERIALS, ETC.). PLEASE FOLLOW THE INSPECTION CARD INSTRUCTIONS AND PHONE NUMBER (650-306-8405 EXT 181) TO SCHEDULE COUNTY DRAINAGE INSPECTIONS ACCORDINGLY. THERE SHALL BE THREE INSPECTIONS: ONE FOR EROSION CONTROL INSTALLATION, ONE BEFORE DRAINAGE FACILITIES ARE BURIED, AND ONE FOR FINAL WALK AROUND.

- DRAINAGE NOTES**
1. DRAINAGE INTENT: IT IS THE INTENT OF THE DRAINAGE SYSTEM TO CONVEY ROOF RUNOFF TO A SAFE LOCATION, AND TO MINIMIZE EXCESSIVE MOISTURE AROUND FOUNDATIONS. DIRECT SLOPES SUCH THAT STORMWATER WILL NOT BE DIVERTED ONTO ADJACENT PROPERTIES.
 2. ALL DOWNSPOUT DRAIN LINES SHALL LEAD TO DETENTION BASIN, AS SHOWN. THE DETENTION BASIN SHALL BE PERFORATED AND DRAIN TO AN ENERGY DISSIPATER, AS SHOWN.
 3. ALL ROOF DRAINAGE PIPES SHALL BE 4" DIAMETER MINIMUM SOLID PIPE, SLOPED AT 1% MINIMUM.
 4. IT IS THE PROPERTY OWNER'S RESPONSIBILITY TO CHECK ON ALL STORMWATER FACILITIES SUCH AS ROOF GUTTERS, DOWNSPOUT LINES, AND THE DETENTION BASIN/ENERGY DISSIPATER TO BE SURE THAT THEY ARE CLEAR OF EXCESSIVE DEBRIS AND OPERATING EFFICIENTLY. THE FACILITIES SHALL BE CHECKED EVERY FALL AND PERIODICALLY DURING THE RAINY SEASON.

- GRADING NOTES**
- CUT VOLUME : 45 CY (FOR FOUNDATION, DRIVEWAY)
 FILL VOLUME: 5 CY
- VOLUMES ABOVE ARE APPROXIMATE.
- THE SUBGRADE BELOW ALL PAVED AREAS SHALL BE BASEROCK COMPACTED TO 95%.
- ALL GRADING SHALL CONFORM TO LOCAL CODES AND ORDINANCES.
- ALL TRENCHES UNDER PROPOSED PAVED AREAS OR CONCRETE SHALL BE BACKFILLED TO SUBGRADE ELEVATION WITH COMPACTED APPROVED GRANULAR MATERIALS. IF TRENCHES ARE IN PROPOSED LANDSCAPE AREAS, THEY SHALL BE BACKFILLED WITH COMPACTED APPROVED GRANULAR MATERIAL TO WITHIN ONE FOOT OF FINISHED GRADE, AND THEN FILLED WITH HAND TAMPED SOILS.
- MAX. HEIGHT OF CUT: 4 FEET (FOR HOUSE)
 MAX. HEIGHT OF FILL: 3 FEET (FOR HOUSE)

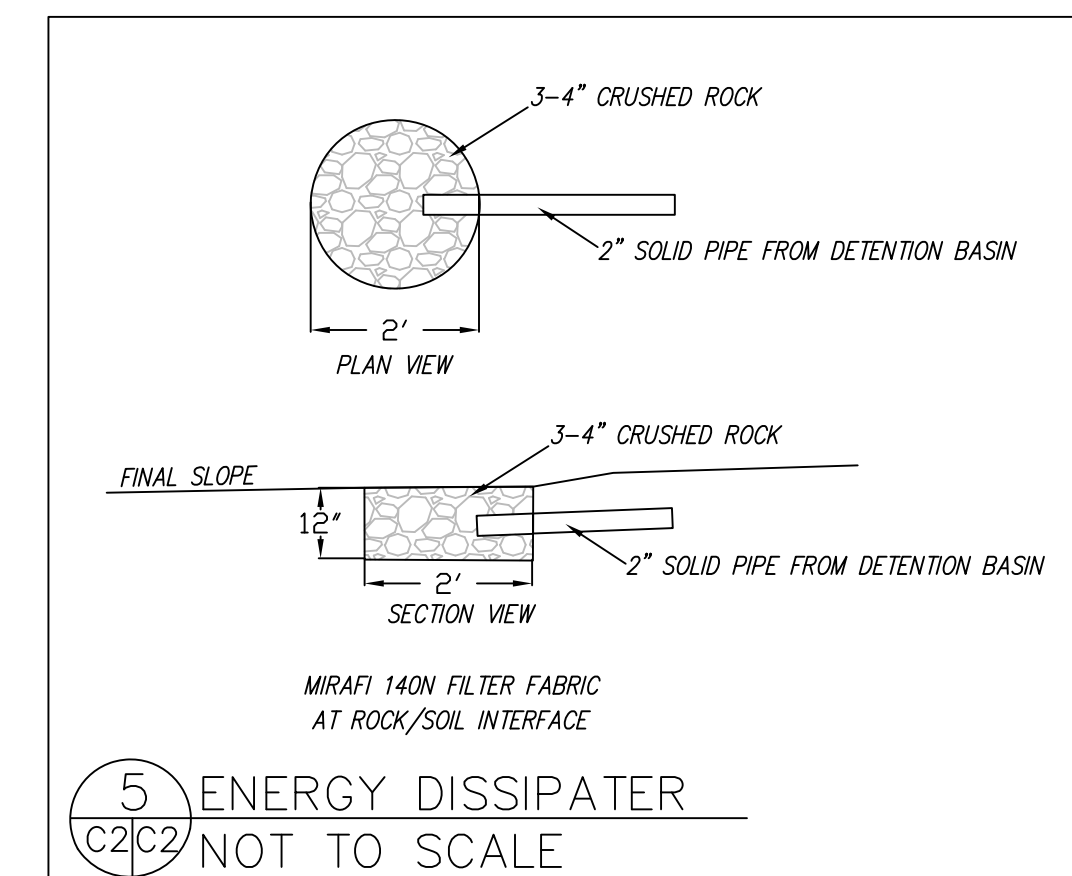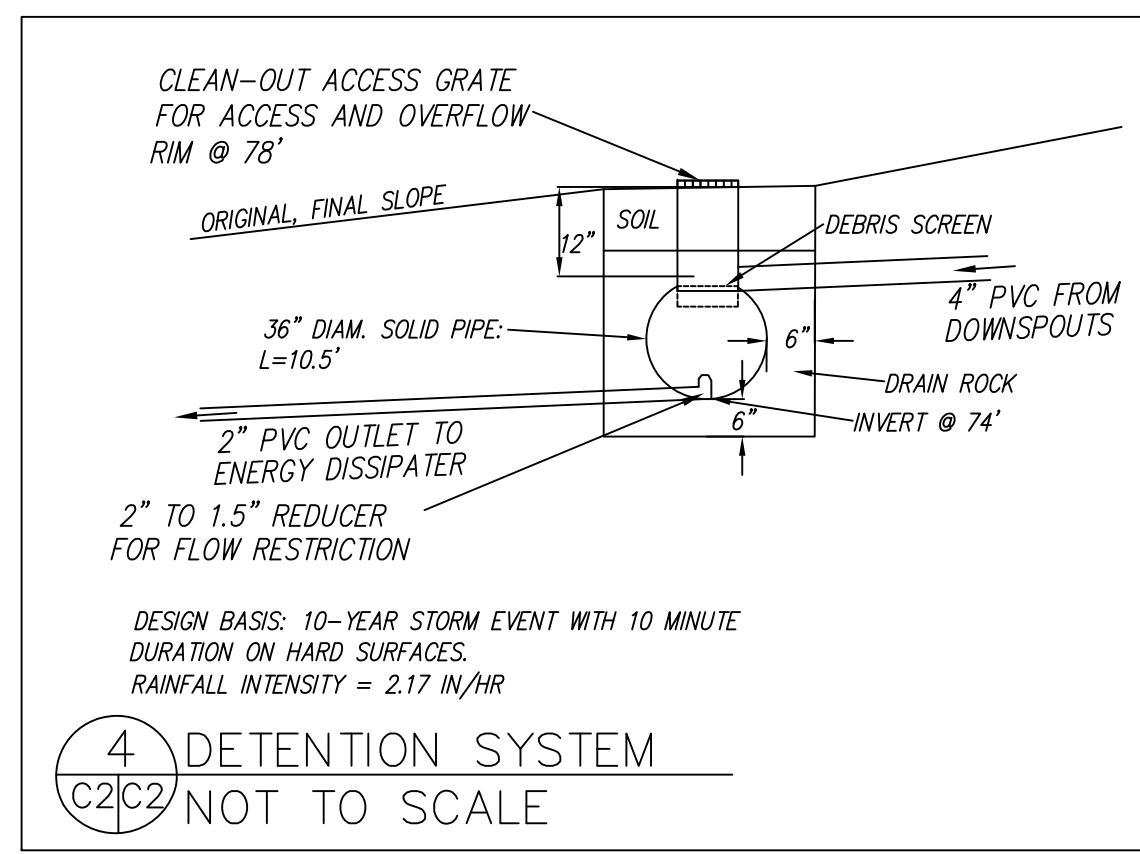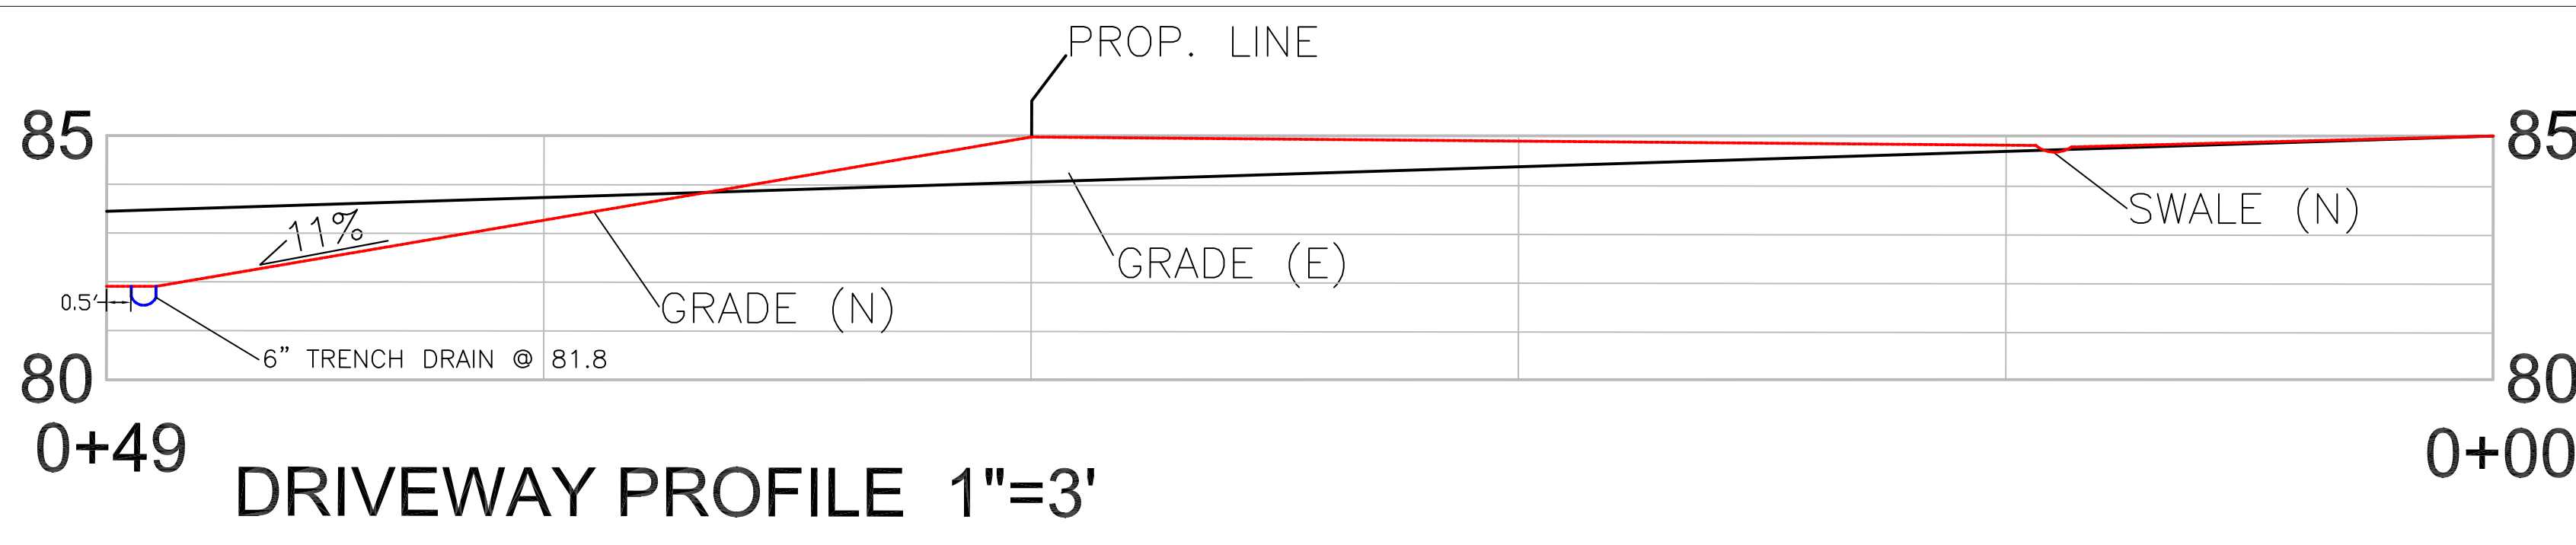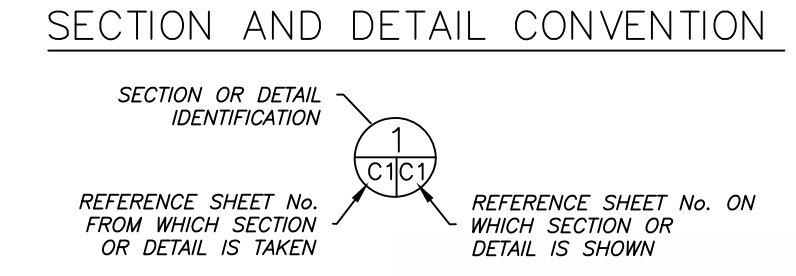


Sigma Prime Geosciences, Inc.
 SIGMA PRIME GEOSCIENCES, INC.
 332 PRINCETON AVENUE
 HALF MOON BAY, CA 94019
 (650) 728-3590
 FAX: 728-3595

DATE: 1-13-20
 DRAWN BY: CMK
 CHECKED BY: AZS
 REV. DATE:
 REV. DATE:

GRADING AND DRAINAGE PLAN - HOUSE

1900 EAST AVE.
 MONTARA, CALIFORNIA
 APN: 037-015-019

SHEET
 C-2

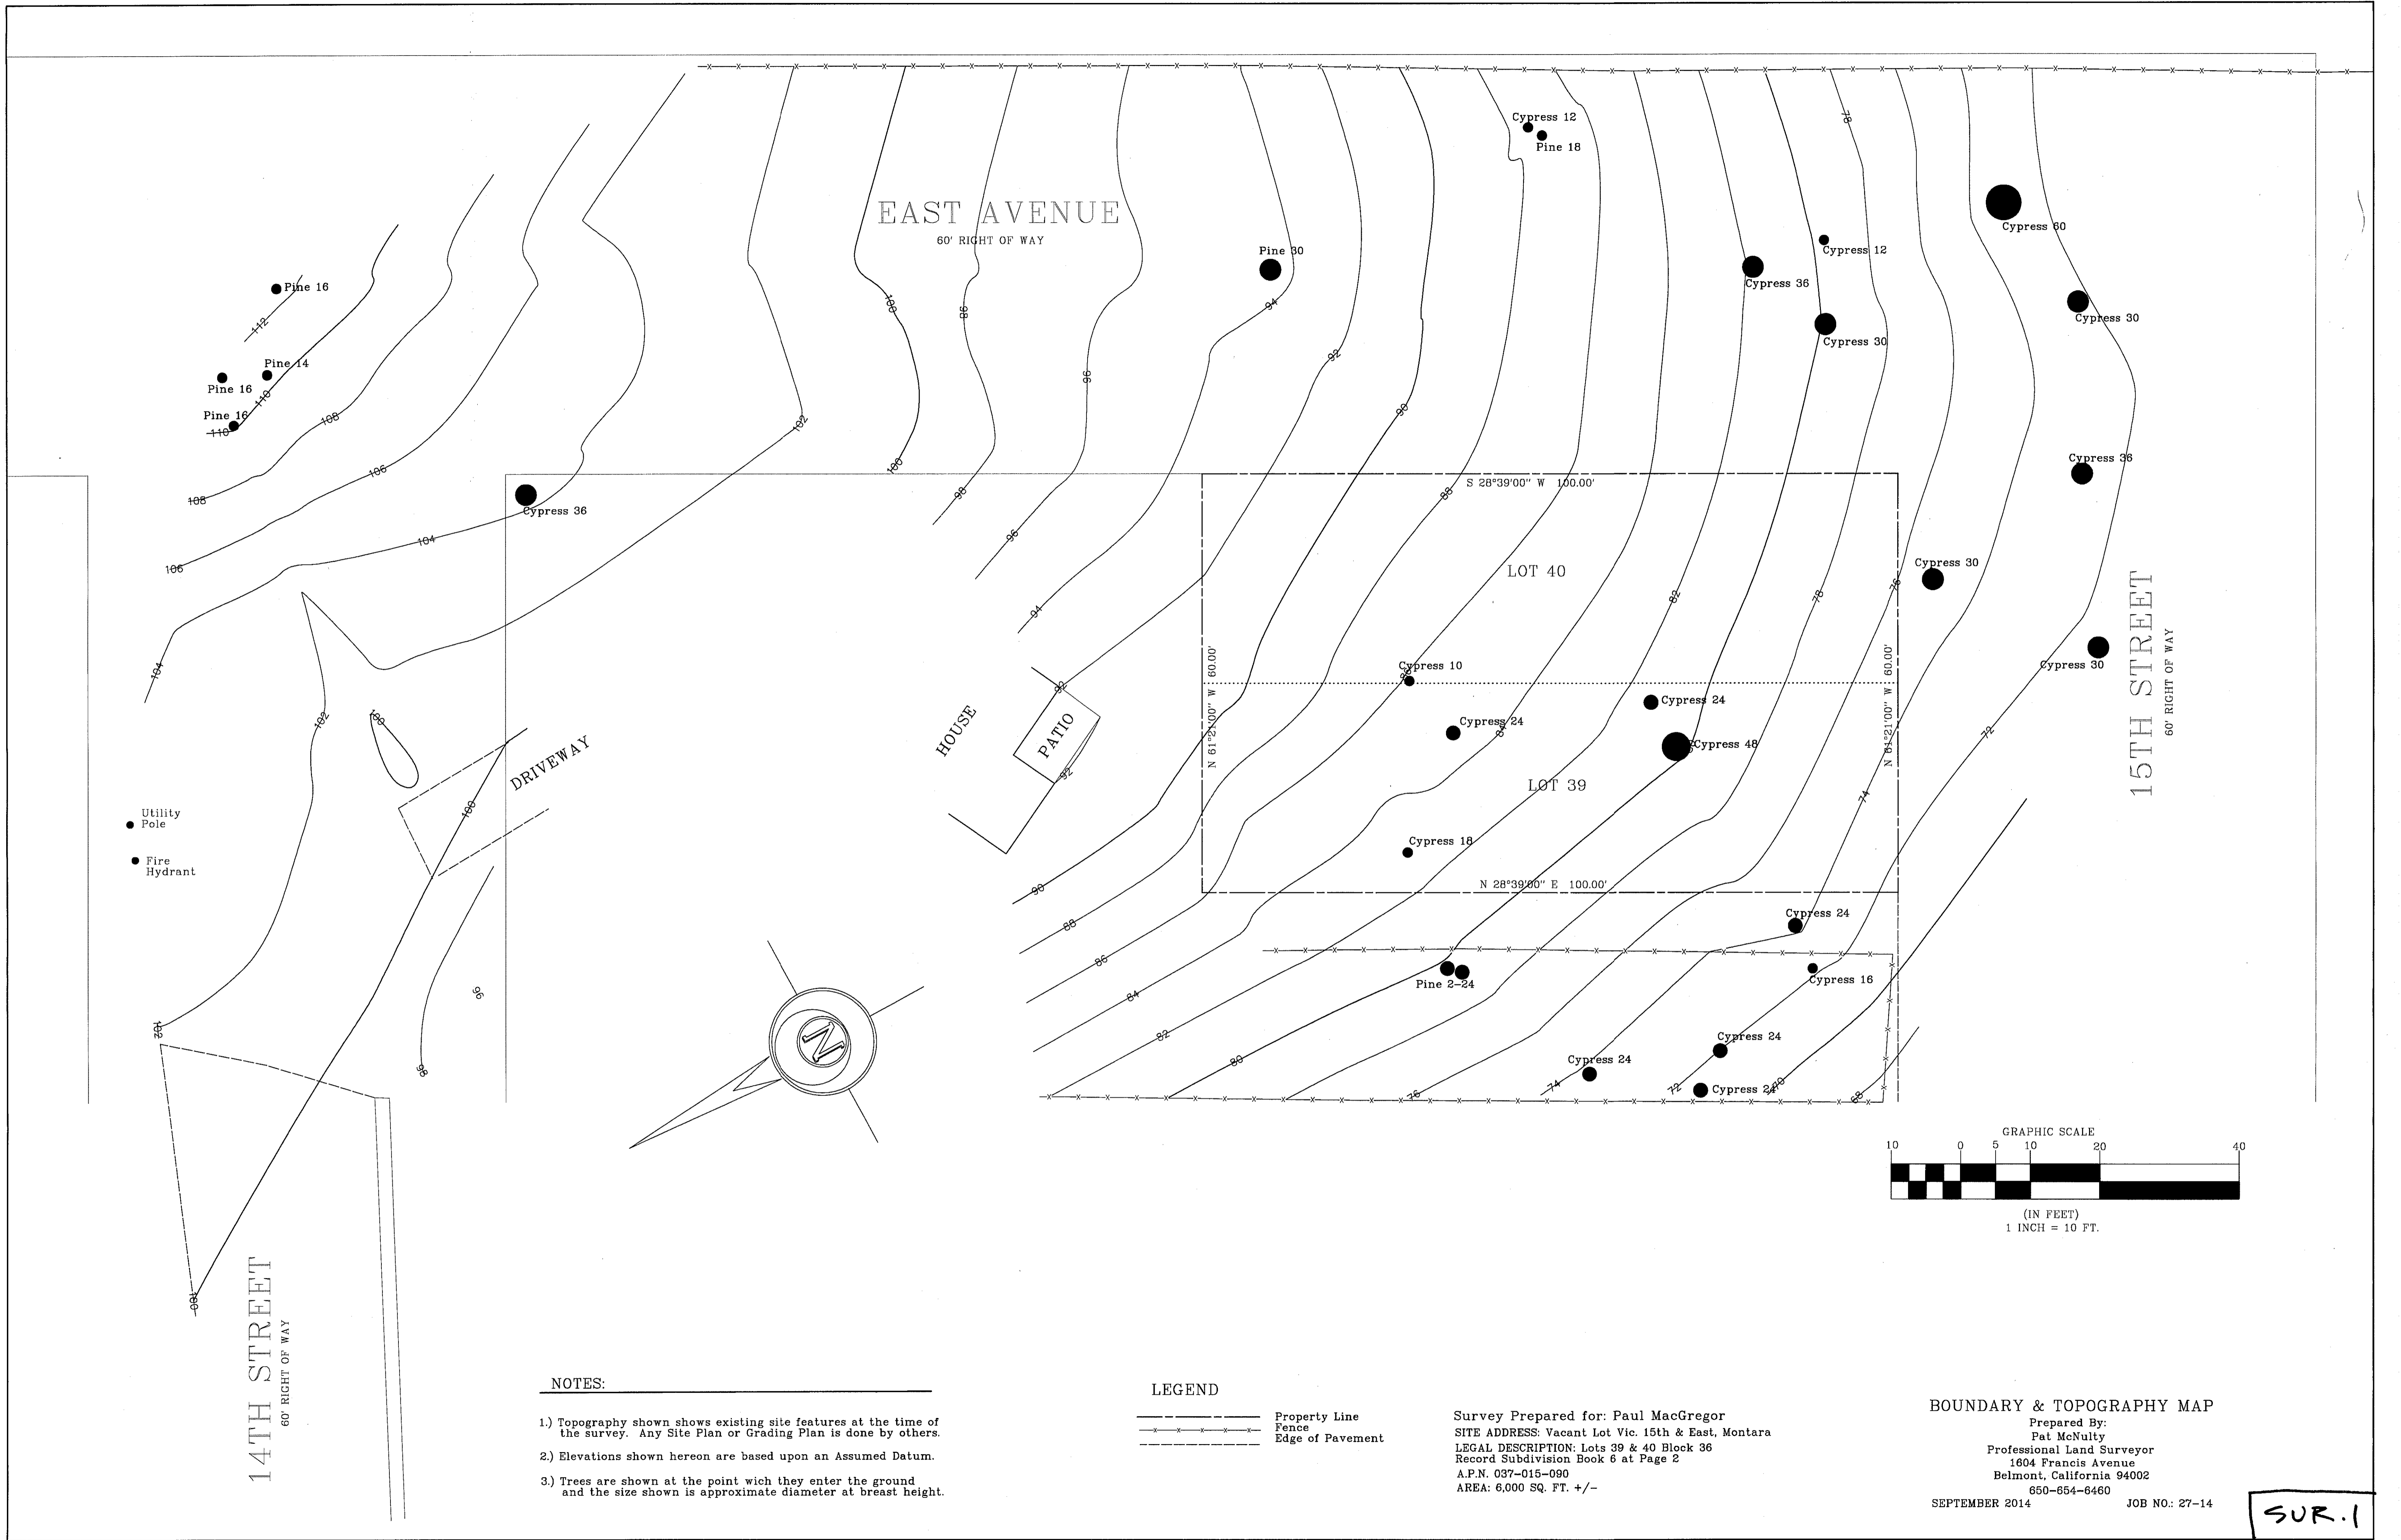

EAST AVENUE

60' RIGHT OF WAY

15TH STREET

60' RIGHT OF WAY

14TH STREET

60' RIGHT OF WAY

NOTES:

- 1) Topography shown shows existing site features at the time of the survey. Any Site Plan or Grading Plan is done by others.
- 2) Elevations shown hereon are based upon an Assumed Datum.
- 3) Trees are shown at the point wick they enter the ground and the size shown is approximate diameter at breast height.

LEGEND

- Property Line
- - - - - Fence
- x — x — x — Edge of Pavement

Survey Prepared for: Paul MacGregor
 SITE ADDRESS: Vacant Lot Vic. 15th & East, Montara
 LEGAL DESCRIPTION: Lots 39 & 40 Block 36
 Record Subdivision Book 6 at Page 2
 A.P.N. 037-015-090
 AREA: 6,000 SQ. FT. +/-

BOUNDARY & TOPOGRAPHY MAP

Prepared By:
 Pat McNulty
 Professional Land Surveyor
 1604 Francis Avenue
 Belmont, California 94002
 650-654-6460
 SEPTEMBER 2014 JOB NO.: 27-14

SUR.1